

AC axial fan


A series



- **Design:** Without guard grille and wall ring
- **Impeller material:** Sheet steel (enameled in black)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Voltage	Frequency	Air flow	Speed	Power consumption	Current draw	Capacitor capacity	Sound pressure level	Operative range 50Hz	Ambient temperature 50Hz	Weight
Type	Motor	1~ VAC	Hz	m³/h	l/min	W	A	uF/V	dB(A)	Pa	°C	kg
A2E300AC4701	M2E068EC	230	50	2440	2650	140	0.62	5.0 / 400	75	0 .. 150	-25 .. 55	2.5
Subject to modification												

Characteristic: Pressure over air flow at 50Hz	n [1/min]	P ₁ [W]	I [A]	LpA [dBA]	ntL [%]
--	--------------	-----------------------	----------	--------------	------------

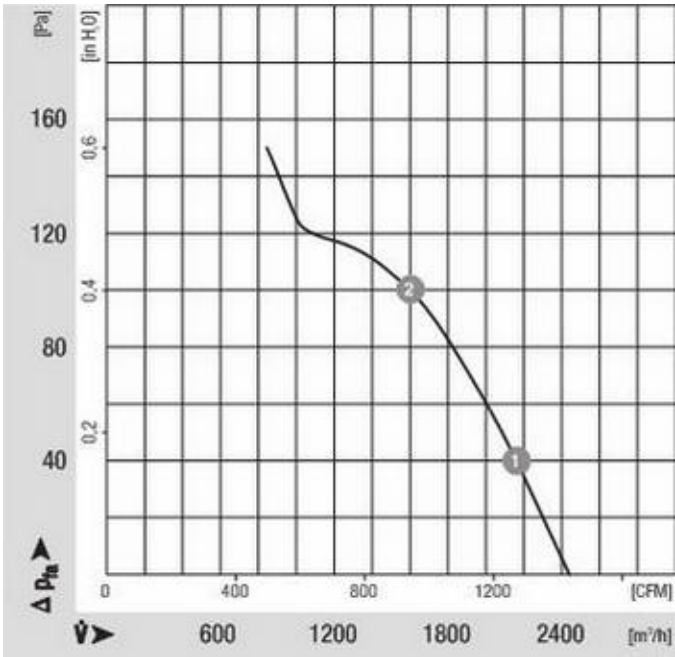


1	2600	149	0,66	--	--
2	2530	162	0,71	--	--


AC axial fan

A series

Specific drawing

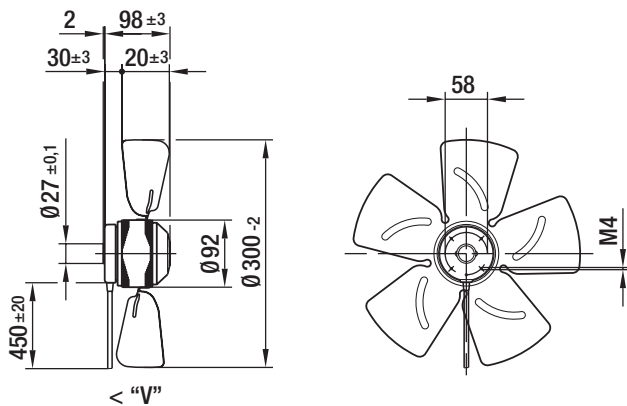

Connection illustration

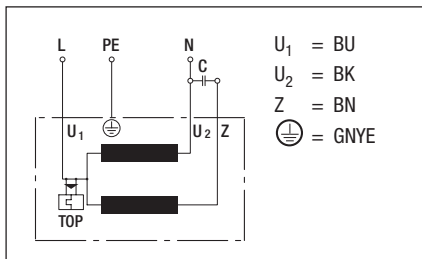

Technical description

- **Design:** Without guard grille and wall ring
- **Bearings:** Maintenance-free ball bearings
- **Direction of flow:** "V"
- **Cable layout:** On the side
- **Insulation class:** "B"
- **System of protection:** IP 44
- **Impeller material:** Sheet steel (enameled in black)
- **Direction of rotation:** Left, looking at rotor
- **Number of impeller blades:** 5
- **Operating mode:** S1
- **Protection class:** I

Contact

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2

D-74673 Mulfingen

Phone +49 (0) 79 38 / 81-0

Fax +49 (0) 79 38 / 81-110

info1@de.ebmpapst.com

www.ebmpapst.com