

D2E146-AP47-22

# AC centrifugal fan

forward curved, dual inlet  
with housing (flange)



**ebm-papst Muldingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Muldingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Muldingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
County court Stuttgart · HRB 590142



## Nominal data

|                               |                   |         |         |
|-------------------------------|-------------------|---------|---------|
| Type                          | D2E146-AP47-22    |         |         |
| Motor                         | M2E068-EC         |         |         |
| Phase                         |                   | 1~      | 1~      |
| Nominal voltage               | VAC               | 230     | 230     |
| Frequency                     | Hz                | 50      | 60      |
| Type of data definition       |                   | ml      | ml      |
| Valid for approval / standard |                   | CE      | CE      |
| Speed                         | min <sup>-1</sup> | 2050    | 2550    |
| Power input                   | W                 | 300     | 330     |
| Current draw                  | A                 | 1.31    | 1.45    |
| Motor capacitor               | µF                | 8       | 8       |
| Capacitor voltage             | VDB               | 400     | 400     |
| Capacitor standard            |                   | P0 (CE) | P0 (CE) |
| Min. back pressure            | Pa                | 200     | 400     |
| Min. ambient temperature      | °C                | -25     | -25     |
| Max. ambient temperature      | °C                | 30      | 25      |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

|                       |        |
|-----------------------|--------|
| Installation category | A      |
| Efficiency category   | Static |
| Variable speed drive  | No     |
| Specific ratio*       | 1.00   |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

|                                |                   | Actual | Request 2013 | Request 2015 |
|--------------------------------|-------------------|--------|--------------|--------------|
| Overall efficiency $\eta_{es}$ | %                 | 28.2   | 26.8         | 33.8         |
| Efficiency grade N             |                   | 38.4   | 37           | 44           |
| Power input $P_e$              | kW                | 0.24   |              |              |
| Air flow $q_v$                 | m <sup>3</sup> /h | 705    |              |              |
| Pressure increase $p_{fs}$     | Pa                | 351    |              |              |
| Speed n                        | min <sup>-1</sup> | 2435   |              |              |

Data definition with optimum efficiency. LU-32744  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



D2E146-AP47-22

## AC centrifugal fan

forward curved, dual inlet  
with housing (flange)

### Technical features

|                                                                    |                                                   |
|--------------------------------------------------------------------|---------------------------------------------------|
| Mass                                                               | 4.4 kg                                            |
| Size                                                               | 146 mm                                            |
| Surface of rotor                                                   | Uncoated                                          |
| Material of impeller                                               | Sheet steel, galvanised                           |
| Housing material                                                   | Sheet steel, galvanised                           |
| Motor suspension                                                   | Motor mounted via brackets on one side            |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                  |
| Type of protection                                                 | IP 44; Depending on installation and position     |
| Insulation class                                                   | "B"                                               |
| Humidity class                                                     | F0                                                |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                           |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                           |
| Mounting position                                                  | Any                                               |
| Condensate discharge holes                                         | None                                              |
| Operation mode                                                     | S1                                                |
| Motor bearing                                                      | Ball bearing                                      |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA                                         |
| Motor protection                                                   | Thermal overload protector (TOP) wired internally |
| Cable exit                                                         | Axial                                             |
| Protection class                                                   | I (if protective earth is connected by customer)  |
| Product conforming to standard                                     | CE                                                |
| Approval                                                           | GOST; CCC                                         |




D2E146-AP47-22

# AC centrifugal fan


forward curved, dual inlet  
with housing (flange)

## Product drawing

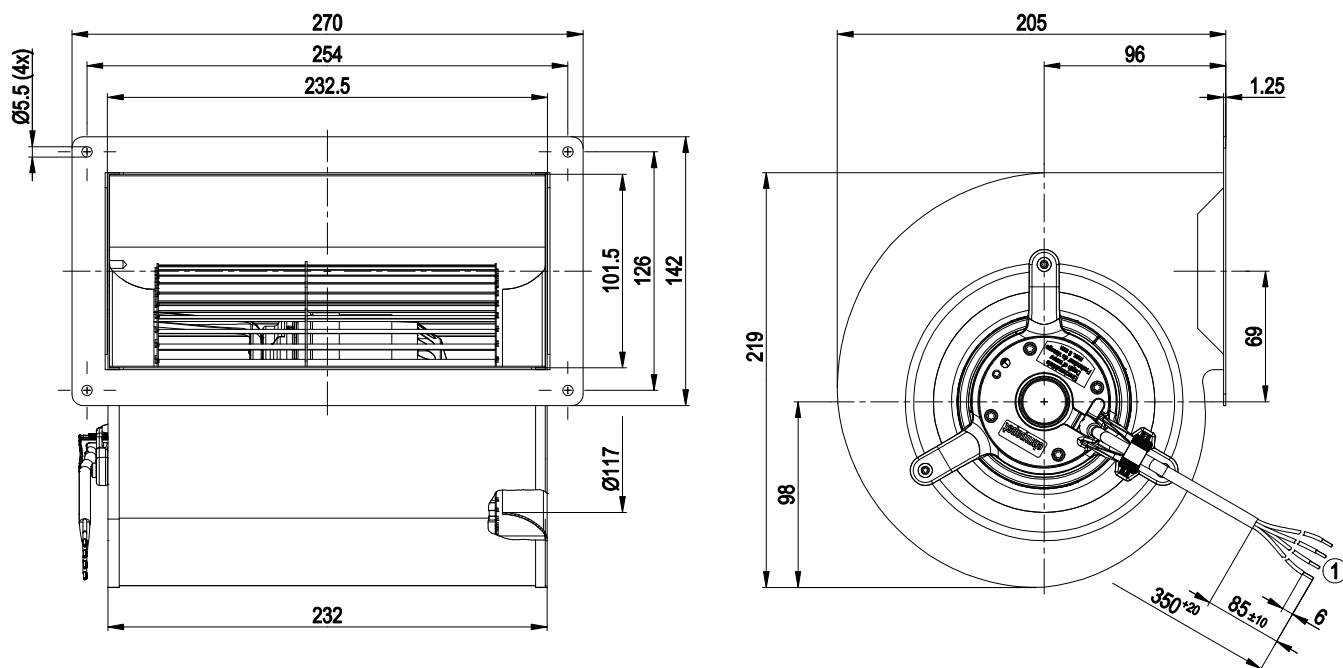

1 Connection line PVC 4G 0.5 mm<sup>2</sup>, 4x lead tips crimped

## Connection screen




|    |              |   |       |    |       |
|----|--------------|---|-------|----|-------|
| U1 | blue         | Z | brown | U2 | black |
| PE | green/yellow |   |       |    |       |



# AC centrifugal fan

forward curved, dual inlet  
with housing (flange)

## Charts: Air flow 50 Hz Y

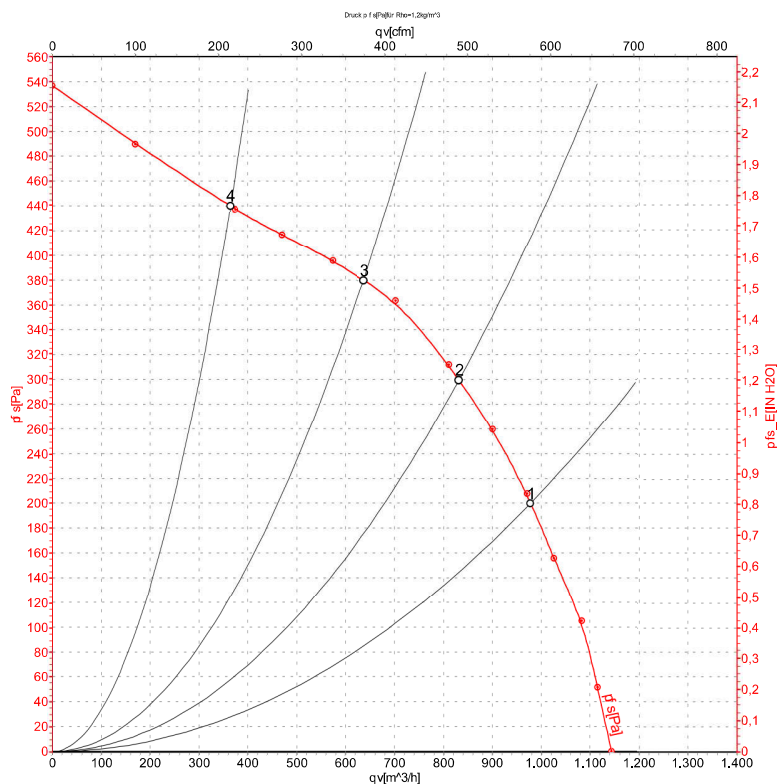

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | qv   | p <sub>ts</sub> |
|---|-------|-----|----|-------------------|----------------|------|------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h | Pa              |
| 1 | Y     | 230 | 50 | 2050              | 300            | 1.31 | 970  | 200             |
| 2 | Y     | 230 | 50 | 2265              | 267            | 1.18 | 830  | 300             |
| 3 | Y     | 230 | 50 | 2490              | 232            | 1.02 | 635  | 380             |
| 4 | Y     | 230 | 50 | 2675              | 191            | 0.84 | 365  | 440             |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · p<sub>ts</sub> = Pressure increase




## AC centrifugal fan

forward curved, dual inlet

with housing (flange)

## Charts: Air flow 60 Hz Y

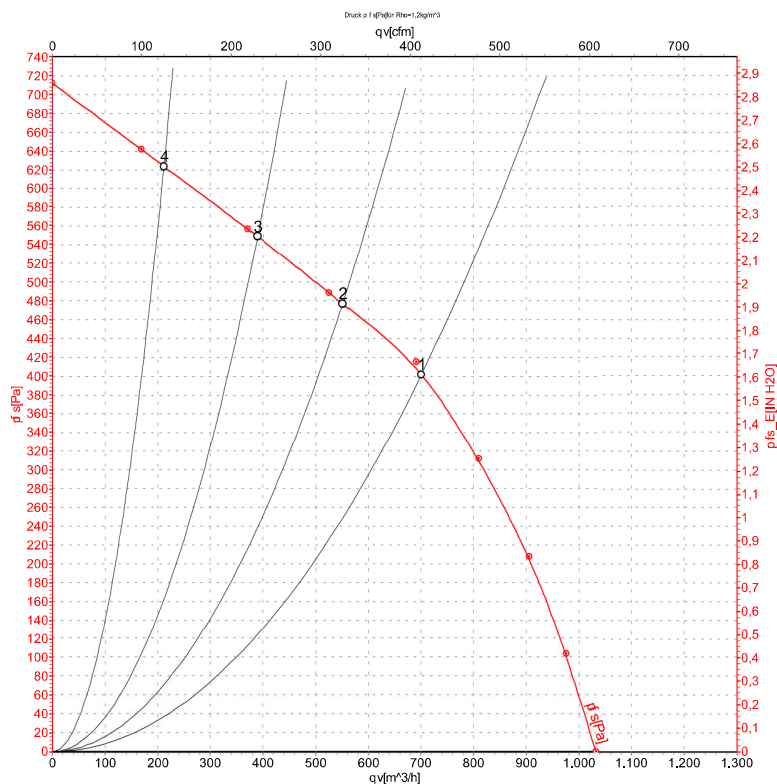

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | Conn. | U   | f  | n                 | P <sub>e</sub> | I    | qv                | p <sub>ts</sub> |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              |
| 1 | Y     | 230 | 60 | 2550              | 330            | 1.45 | 700               | 400             |
| 2 | Y     | 230 | 60 | 2770              | 300            | 1.36 | 550               | 475             |
| 3 | Y     | 230 | 60 | 2975              | 277            | 1.28 | 390               | 550             |
| 4 | Y     | 230 | 60 | 3095              | 260            | 1.22 | 210               | 625             |

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · p<sub>ts</sub> = Pressure increase

