

D2E146-HS01-05

# AC centrifugal fan

forward-curved, dual-intake  
with housing (large flange)



## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                             |                    |         |
|-----------------------------|--------------------|---------|
| Type                        | D2E146-HS01-05     |         |
| Motor                       | M2E068-DF          |         |
| Phase                       |                    | 1~      |
| Nominal voltage             | VAC                | 230     |
| Frequency                   | Hz                 | 50      |
| Method of obtaining data    |                    | ml      |
| Valid for approval/standard |                    | CE      |
| Speed (rpm)                 | min <sup>-1</sup>  | 1450    |
| Power consumption           | W                  | 200     |
| Current draw                | A                  | 0.88    |
| Capacitor                   | µF                 | 5       |
| Capacitor voltage           | VDB                | 400     |
| Capacitor standard          |                    | S2 (CE) |
| Min. back pressure          | Pa                 | 50      |
| Min. back pressure          | inH <sub>2</sub> O | 0.2     |
| Min. ambient temperature    | °C                 | -20     |
| Max. ambient temperature    | °C                 | 50      |
| Starting current            | A                  | 0.92    |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



# AC centrifugal fan

forward-curved, dual-intake  
with housing (large flange)

## Technical description


|                                                                            |                                                                 |
|----------------------------------------------------------------------------|-----------------------------------------------------------------|
| Weight                                                                     | 2.94 kg                                                         |
| Fan size                                                                   | 146 mm                                                          |
| Rotor surface                                                              | Partly cast in aluminum                                         |
| Terminal box material                                                      | PP plastic, black                                               |
| Impeller material                                                          | PP plastic, glass-fiber reinforced                              |
| Housing material                                                           | PP plastic, black                                               |
| Motor suspension                                                           | Motor vibration-damped on both sides                            |
| Direction of rotation                                                      | Counterclockwise, viewed toward rotor                           |
| Degree of protection                                                       | IP20                                                            |
| Insulation class                                                           | "F"                                                             |
| Moisture (F) / Environmental (H) protection class                          | H0 - dry environment                                            |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                                         |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                         |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request    |
| Condensation drainage holes                                                | None, open rotor                                                |
| Mode                                                                       | S1                                                              |
| Motor bearing                                                              | Calotte bearing                                                 |
| Speed levels                                                               | 4                                                               |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA                                                       |
| Electrical hookup                                                          | With plug; Via terminal box, capacitor integrated and connected |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected           |
| With cable                                                                 | Variable                                                        |
| Protection class                                                           | I (with customer connection of protective earth)                |
| Motor capacitor according to EN 60252-1 in safety protection class         | S2                                                              |
| Conformity with standards                                                  | EN 60335-1; CE                                                  |
| Approval                                                                   | VDE                                                             |



# AC centrifugal fan

forward-curved, dual-intake  
with housing (large flange)

## Product drawing

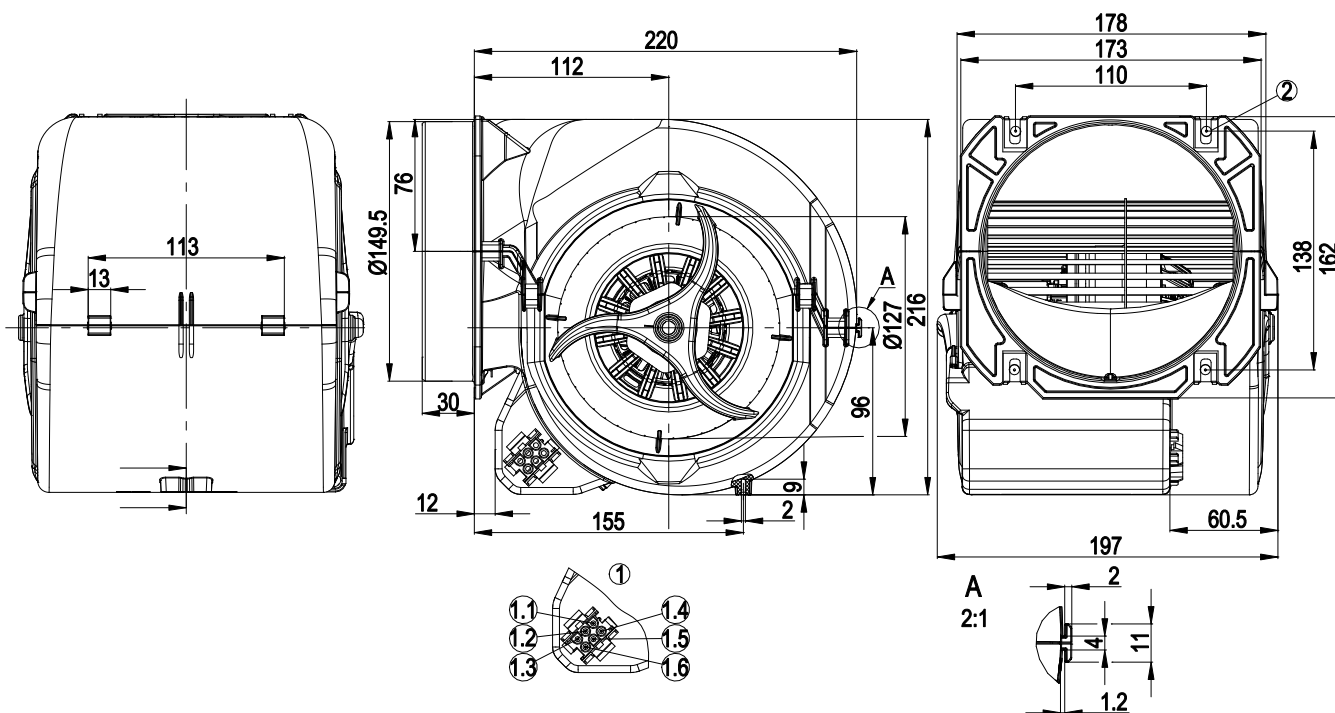


|     |                                                                                                                 |
|-----|-----------------------------------------------------------------------------------------------------------------|
| 1   | Coded plug system AMP Universal Mate-N-Lok; connector housing: AMP 926 682-3; 6x plug pin AMP 926 886-1         |
| 1.1 | L = step 1                                                                                                      |
| 1.2 | L = step 2                                                                                                      |
| 1.3 | L = step 3                                                                                                      |
| 1.4 | L = step 4                                                                                                      |
| 1.5 | N                                                                                                               |
| 1.6 | Protective earth                                                                                                |
| 2   | 4x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus material thickness of mounting) |

# AC centrifugal fan

forward-curved, dual-intake  
with housing (large flange)

## Connection diagram



The switch must interrupt the circuit when switching.


|   |                  |   |        |   |                     |
|---|------------------|---|--------|---|---------------------|
| 1 | Step 1 (min.)    | 2 | Step 2 | 3 | Step 3              |
| 4 | Step 4 (max.)    | 5 | N      | 6 | PE protective earth |
| 7 | Speed increasing |   |        |   |                     |



## AC centrifugal fan

forward-curved, dual-intake  
with housing (large flange)

## Curves: Air performance 50 Hz

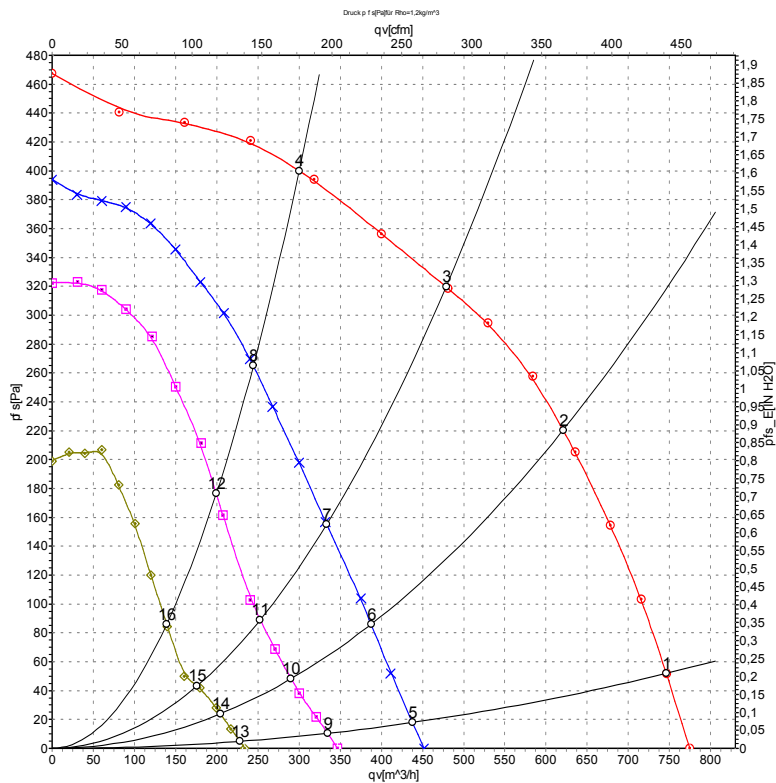

Measurement: LU-131563-1  
Measurement: LU-110223-1  
Measurement: LU-110225-1  
Measurement: LU-110227-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Stage | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub>    |
|----|-------|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|--------------------|
|    |       | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | cfm            | inH <sub>2</sub> O |
| 1  |       | 230 | 50 | 1450              | 200            | 0.88 | 745               | 50              | 440            | 0.20               |
| 2  |       | 230 | 50 | 1965              | 179            | 0.78 | 620               | 220             | 365            | 0.88               |
| 3  |       | 230 | 50 | 2280              | 162            | 0.72 | 480               | 320             | 280            | 1.28               |
| 4  |       | 230 | 50 | 2545              | 140            | 0.63 | 300               | 400             | 175            | 1.61               |
| 5  | 3     | 230 | 50 | 875               | 120            | 0.57 | 440               | 18              | 260            | 0.07               |
| 6  | 3     | 230 | 50 | 1240              | 115            | 0.56 | 390               | 86              | 230            | 0.35               |
| 7  | 3     | 230 | 50 | 1590              | 109            | 0.54 | 335               | 155             | 195            | 0.62               |
| 8  | 3     | 230 | 50 | 2090              | 93             | 0.50 | 245               | 265             | 145            | 1.06               |
| 9  | 2     | 230 | 50 | 680               | 104            | 0.51 | 335               | 10              | 195            | 0.04               |
| 10 | 2     | 230 | 50 | 965               | 102            | 0.50 | 290               | 48              | 170            | 0.19               |
| 11 | 2     | 230 | 50 | 1245              | 98             | 0.49 | 255               | 89              | 150            | 0.36               |
| 12 | 2     | 230 | 50 | 1690              | 89             | 0.47 | 200               | 176             | 120            | 0.71               |
| 13 | 1     | 230 | 50 | 470               | 90             | 0.45 | 230               | 5               | 135            | 0.02               |
| 14 | 1     | 230 | 50 | 660               | 88             | 0.44 | 205               | 24              | 120            | 0.10               |
| 15 | 1     | 230 | 50 | 870               | 87             | 0.44 | 175               | 44              | 105            | 0.18               |
| 16 | 1     | 230 | 50 | 1195              | 83             | 0.43 | 140               | 86              | 80             | 0.35               |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

