

D3G146-AI50-01

EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	D3G146-AI50-01	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1800
Power consumption	W	165
Current draw	A	1.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	41.4	32.7	09 Power consumption P_{ed}	kW	0.16
02 Measurement category		A		09 Air flow q_v	m ³ /h	605
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	351
04 Efficiency grade N		52.7	44	10 Speed (rpm) n	min ⁻¹	2440
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-73884



EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Technical description


Weight	3.2 kg
Size	146 mm
Motor size	74
Rotor surface	Unpainted
Impeller material	Sheet steel, galvanized
Housing material	PP plastic
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Control input 0-10 VDC / PWM - Output 10 VDC, max. 1.1 mA - Tach output - Soft start - Motor current limitation
EMC immunity to interference	According to EN 61000-6-2
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Connector with cable
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	UL 1004-3 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1



EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Product drawing

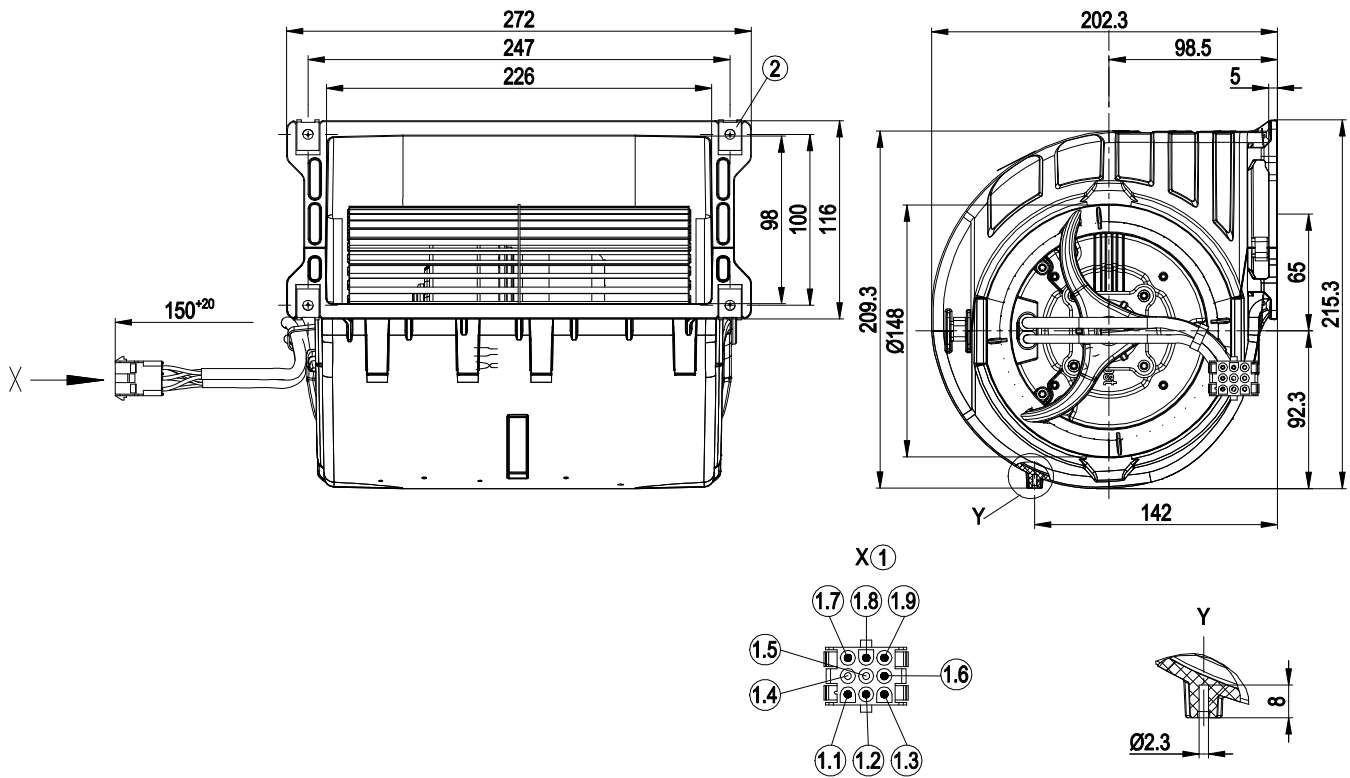


1	Coded plug system: 9-pole connector housing tyco 927231-5, 7x plug pin tyco 926886-1, mating connector not included in scope of delivery.
1.1	GND (blue)
1.2	Tach (white)
1.3	0-10 V PWM (yellow)
1.4	not used
1.5	not used
1.6	+10 V (red)
1.7	L (black)
1.8	N (blue)
1.9	PE (green/yellow)
2	4x sheet metal nut for thread EN ISO 1478-ST 4.8 (min. screw length 14.5 mm plus material thickness of attachment)



EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Connection diagram

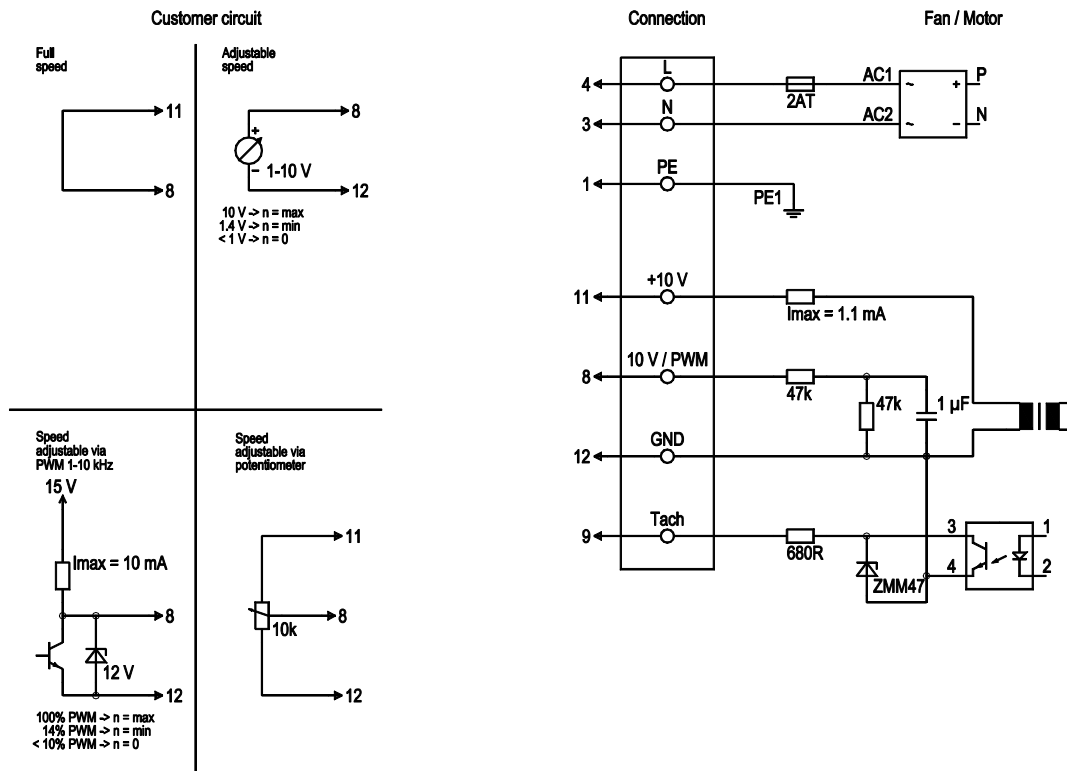


No.	Conn.	Designation	Color	Function/assignment
4	L		black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
3	N		blue	Neutral conductor
1	PE		green/yellow	Protective earth
8	0-10 V PWM		yellow	Control input 0-10 V or PWM, electrically isolated
9	Tach		white	Tach output: open collector, 1 pulse per revolution, electrically isolated
11	10V / max 1.1 mA		red	Voltage output 10 V/max. 1.1 mA, electrically isolated
12	GND		blue	GND connection for control interface



EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Curves: Air performance 50 Hz

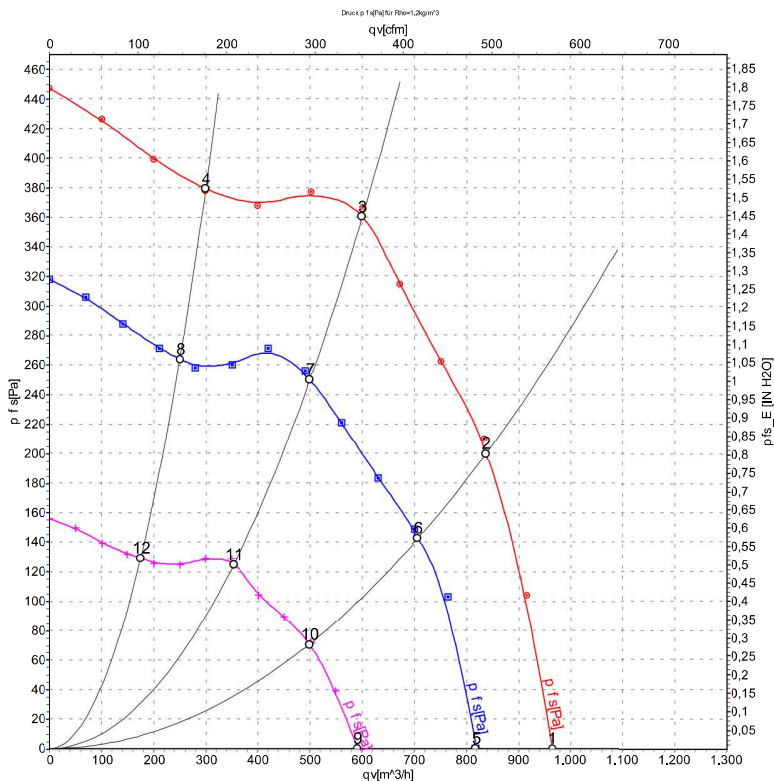

Measurement: LU-73884-1
Measurement: LU-71535-1
Measurement: LU-71536-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{ts}	q _v	p _{ts}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	50	1800	165	1.20	965	0	570	0.00
2	230	50	2050	163	1.20	840	200	495	0.80
3	230	50	2440	162	1.20	600	360	355	1.45
4	230	50	2560	123	0.96	300	380	175	1.53
5	230	50	1530	107	0.78	820	0	480	0.00
6	230	50	1735	106	0.79	705	144	415	0.58
7	230	50	2060	104	0.79	500	251	295	1.01
8	230	50	2155	79	0.61	250	264	145	1.06
9	230	50	1095	45	0.35	590	0	350	0.00
10	230	50	1260	44	0.35	500	72	295	0.29
11	230	50	1475	45	0.35	355	127	210	0.51
12	230	50	1520	35	0.28	175	129	105	0.52

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{ts} = Pressure increase

