

G4D225-FK10-03

AC centrifugal fan

forward curved, single inlet
with housing (flange)



ebm-papst Muldingen GmbH & Co. KG

Bachmühle 2 · D-74673 Muldingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Muldingen

County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

County court Stuttgart · HRB 590142



Nominal data

Type	G4D225-FK10-03		
Motor	M4D094-FA		
Phase		3~	3~
Nominal voltage	VAC	400	400
Connection		Y	Y
Frequency	Hz	50	60
Type of data definition		fa	ml
Valid for approval / standard		CE	CE
Speed	min ⁻¹	1350	1500
Power input	W	380	540
Current draw	A	0.75	0.94
Min. back pressure	Pa	0	50
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	90	55
Starting current	A	2.8	2.7

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}		34.2	26	33
Efficiency grade N		45.2	37	44
Power input P_e	kW	0.18		
Air flow q_v	m ³ /h	755		
Pressure increase p_{fs}	Pa	295		
Speed n	min ⁻¹	1445		

Data established at point of optimum efficiency



G4D225-FK10-03

AC centrifugal fan

forward curved, single inlet
with housing (flange)

Technical features

Mass	9.5 kg
Size	225 mm
Surface of rotor	Coated in black
Material of impeller	Sheet steel, hot-galvanised
Housing material	Sheet steel, hot-galvanised
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2004); CE
Approval	CCC




G4D225-FK10-03

AC centrifugal fan

forward curved, single inlet
with housing (flange)

Product drawing

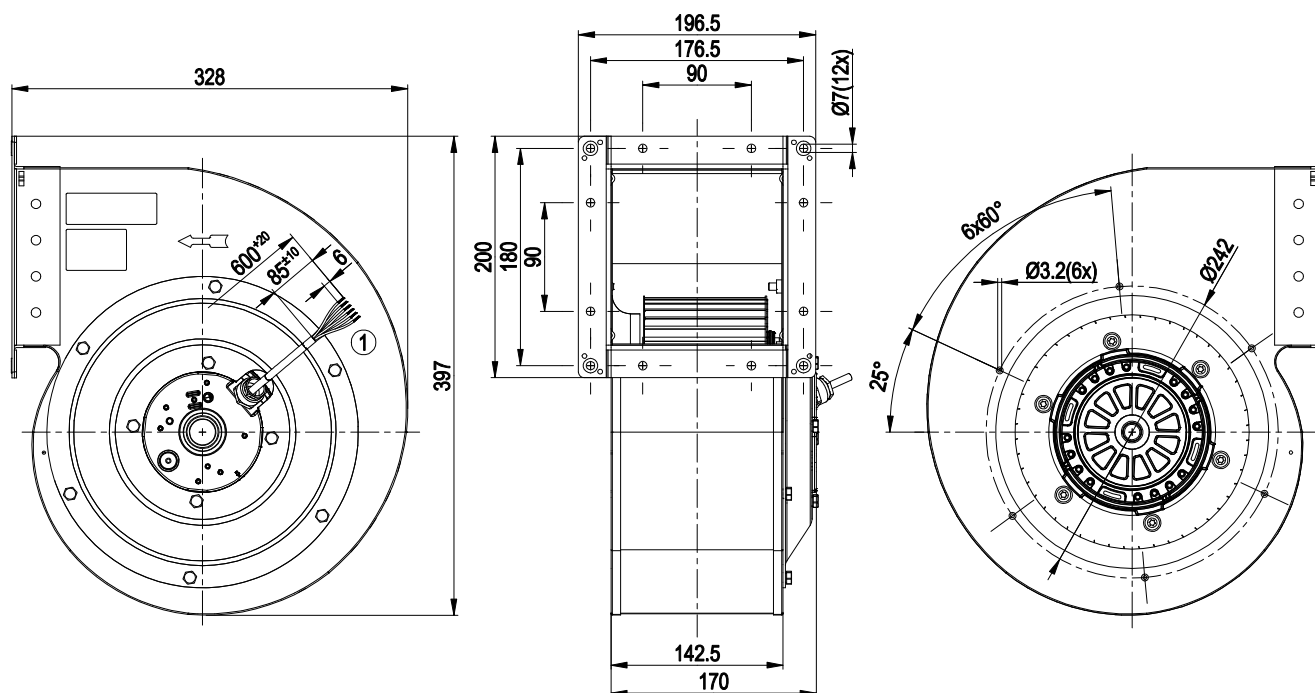

1 Connection line silicone 6G 0.5 mm², 6 x brass lead tips crimped




G4D225-FK10-03

AC centrifugal fan

forward curved, single inlet
with housing (flange)

Connection screen

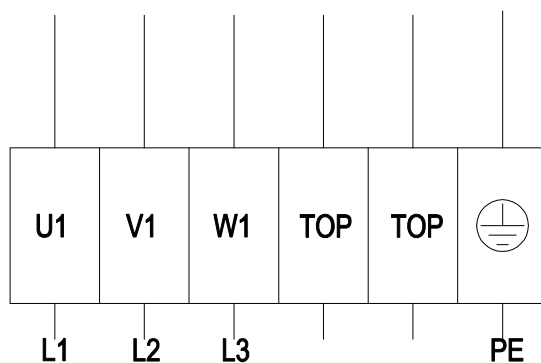

Δ	Star connection	L1	= U1 = black	L2	= V1 = blue
L3	= W1 = brown	TOP	2 x grey	PE	green/yellow




G4D225-FK10-03

AC centrifugal fan

forward curved, single inlet
with housing (flange)

Charts: Air flow 50 Hz Y

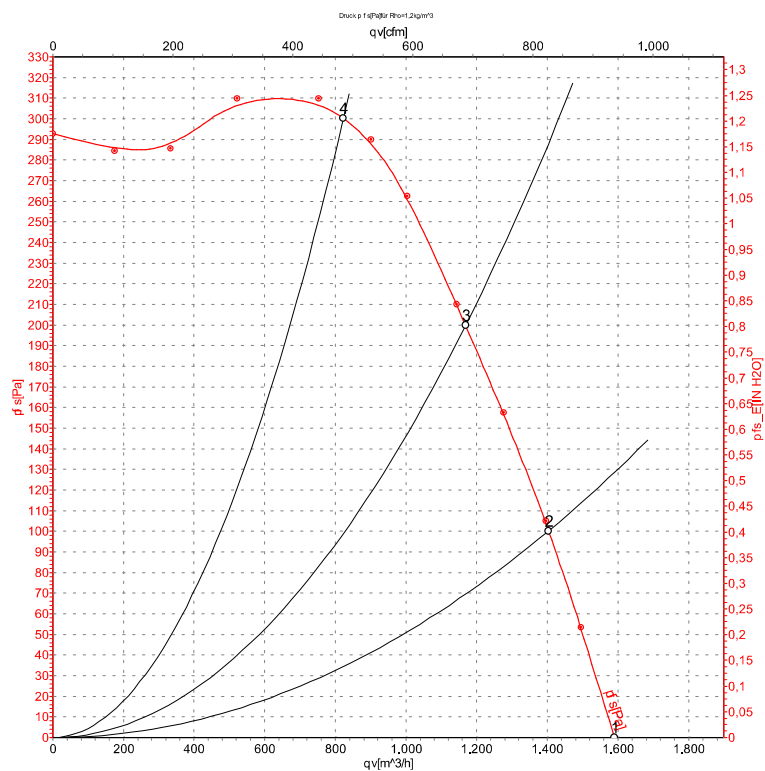

Measurement: LU-56986

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	qv	p _{ts}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	Y	400	50	1350	380	0.75	1590	0
2	Y	400	50	1380	326	0.69	1405	100
3	Y	400	50	1405	266	0.63	1170	200
4	Y	400	50	1435	194	0.57	825	300

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{ts} = Pressure increase




G4D225-FK10-03

AC centrifugal fan

forward curved, single inlet
with housing (flange)

Charts: Air flow 60 Hz Y

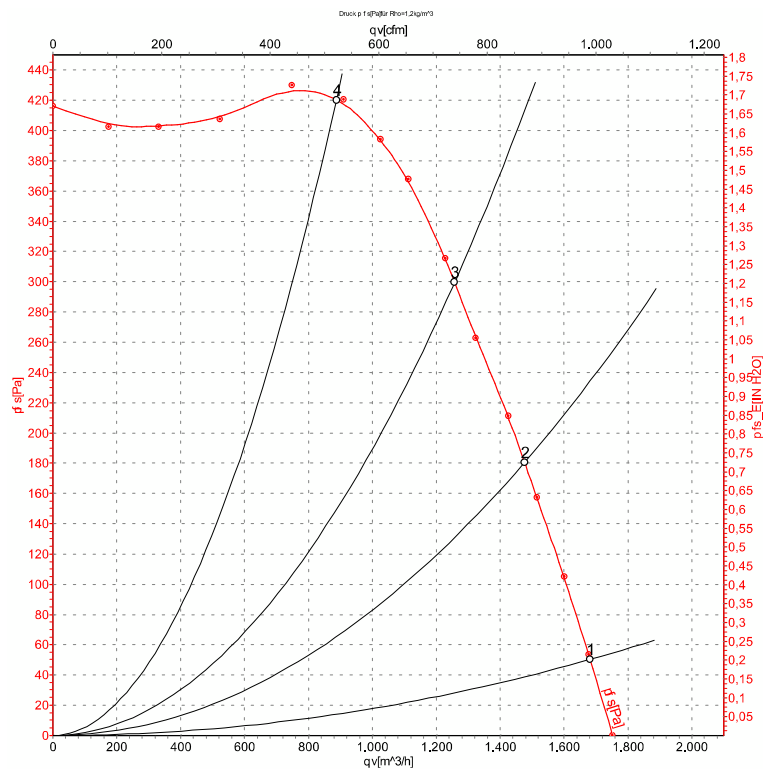

Measurement: LU-56987

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	Conn.	U	f	n	P _e	I	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa
1	Y	400	60	1500	540	0.94	1680	50
2	Y	400	60	1570	457	0.81	1475	180
3	Y	400	60	1615	380	0.70	1255	300
4	Y	400	60	1680	269	0.55	885	420

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

