

K1G200-AA73-12

# EC diagonal module

sickle-shaped blades (S series), single-intake  
with support bracket



**ebm-papst Mulfingen GmbH & Co. KGaA & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                   |       |       |
|--------------------------|-------------------|-------|-------|
| Type                     | K1G200-AA73-12    |       |       |
| Motor                    | M1G055-BD         |       |       |
| Phase                    |                   | 1~    | 1~    |
| Nominal voltage          | VAC               | 230   | 230   |
| Frequency                | Hz                | 50/60 | 50/60 |
| Method of obtaining data |                   | ml    | ml    |
| Speed (rpm)              | min <sup>-1</sup> | 2000  | 1500  |
| Power consumption        | W                 | 35    |       |
| Current draw             | A                 | 0.3   |       |
| Max. back pressure       | Pa                | 120   |       |
| Max. back pressure       | in. wg            | 0.48  |       |
| Min. ambient temperature | °C                | -30   | -30   |
| Max. ambient temperature | °C                | 50    | 50    |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

# EC diagonal module

sickle-shaped blades (S series), single-intake  
with support bracket


## Technical description

|                                                                             |                                                                                                                                                                                                       |
|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                      | 1.06 kg                                                                                                                                                                                               |
| Size                                                                        | 200 mm                                                                                                                                                                                                |
| Motor size                                                                  | 55                                                                                                                                                                                                    |
| Impeller material                                                           | PP plastic                                                                                                                                                                                            |
| Support bracket material                                                    | PP plastic                                                                                                                                                                                            |
| Number of blades                                                            | 7                                                                                                                                                                                                     |
| Direction of rotation                                                       | Clockwise, viewed toward rotor                                                                                                                                                                        |
| Degree of protection                                                        | IP55; only with suitable plug, to be installed by customer                                                                                                                                            |
| Insulation class                                                            | "B"                                                                                                                                                                                                   |
| Moisture (F) / Environmental (H) protection class                           | H1+ = Moist – temporary or constantly high level of humidity + additional load                                                                                                                        |
| Max. permitted ambient temp. for motor (transport/storage)                  | +80 °C                                                                                                                                                                                                |
| Min. permitted ambient temp. for motor (transport/storage)                  | -40 °C                                                                                                                                                                                                |
| Installation position                                                       | Any                                                                                                                                                                                                   |
| Condensation drainage holes                                                 | None, open rotor                                                                                                                                                                                      |
| Mode                                                                        | S1                                                                                                                                                                                                    |
| Motor bearing                                                               | Ball bearing                                                                                                                                                                                          |
| Technical features                                                          | <ul style="list-style-type: none"> <li>- Speed setting input (230 V)</li> <li>- ESM+ expandable with plug-in module</li> <li>- Soft start</li> <li>- Thermal overload protection for motor</li> </ul> |
| Speed levels                                                                | 2                                                                                                                                                                                                     |
| EMC immunity to interference                                                | According to EN 61000-6-2 (industrial environment)                                                                                                                                                    |
| EMC circuit feedback                                                        | According to EN 61000-3-2/3                                                                                                                                                                           |
| EMC interference emission                                                   | According to EN 61000-6-3 (household environment)                                                                                                                                                     |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)  | <= 0.25 mA                                                                                                                                                                                            |
| Electrical hookup                                                           | Plug                                                                                                                                                                                                  |
| Motor protection                                                            | Thermal switch auto reset, internally connected                                                                                                                                                       |
| Protection class assignment                                                 | II; The built-in component has several local protection class assignments.<br>The final protection class is determined by the intended installation.                                                  |
| Safety class of the permissible refrigerants according to EN378 / ISO5149-1 | A3/B3                                                                                                                                                                                                 |
| Maximum surface temperature                                                 | 225 °C                                                                                                                                                                                                |
| Conformity with standards                                                   | EN 60034-1; EN 60204-1; EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; UKCA; CE                                                                                                             |
| Comment on CE                                                               | Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.                                                                                         |
| Approval                                                                    | CSA C22.2 No. 77; CCC; UL 1004-3; VDE                                                                                                                                                                 |

# EC diagonal module

sickle-shaped blades (S series), single-intake  
with support bracket

## Product drawing

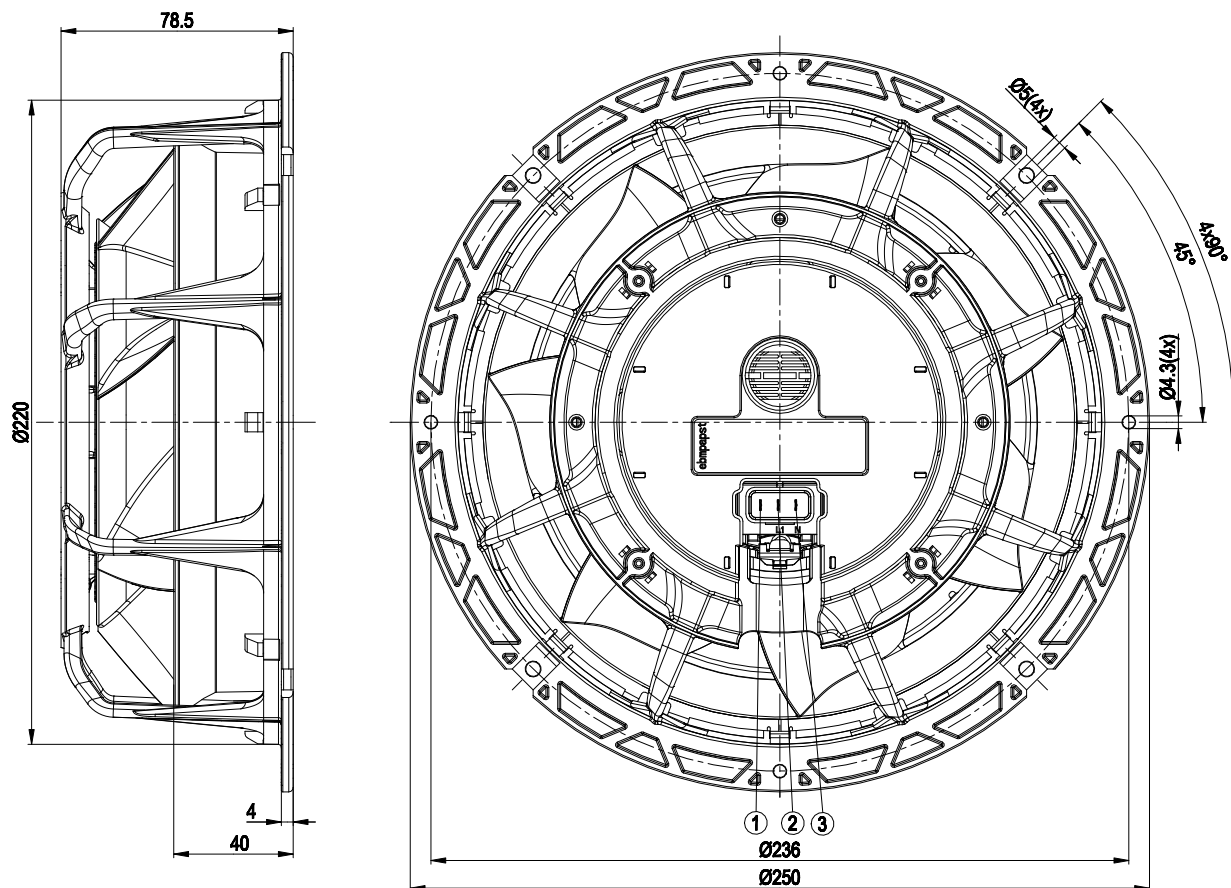


- |   |                                                |
|---|------------------------------------------------|
| 1 | Pin S, speed selection (flat plug 2.8 x 0.5)   |
| 2 | Pin L1, phase (flat plug 2.8 x 0.5)            |
| 3 | Pin N, neutral conductor (flat plug 2.8 x 0.5) |

# EC diagonal module

sickle-shaped blades (S series), single-intake  
with support bracket

## Connection diagram

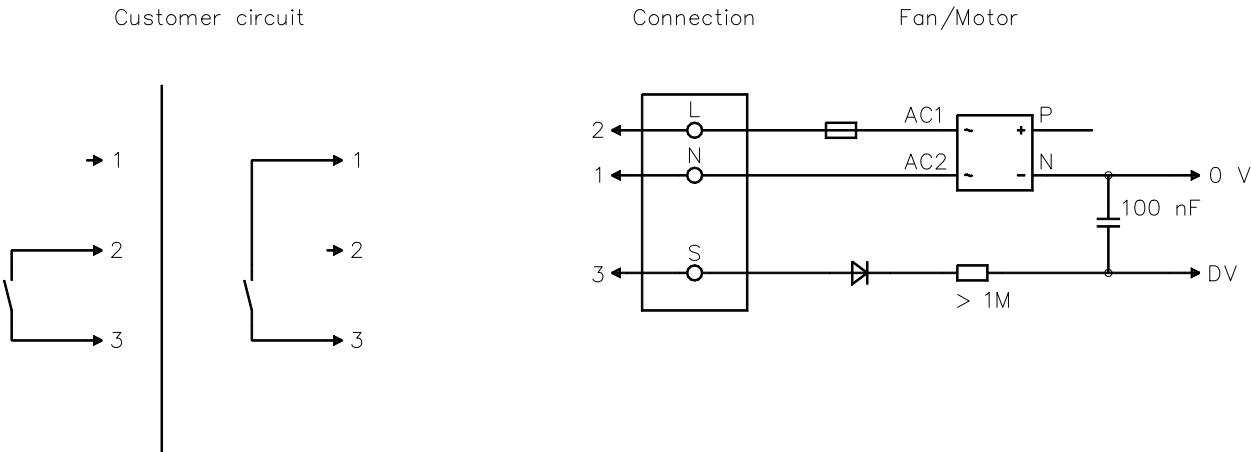


| No. | Conn. | Designation | Color | Function/assignment                                                       |
|-----|-------|-------------|-------|---------------------------------------------------------------------------|
| 1   | N     |             | blue  | Neutral conductor                                                         |
| 2   | L     |             | black | Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range           |
| 3   | S     |             | brown | Speed selection: switch open speed 1 (fast), switch closed speed 2 (slow) |

# EC diagonal module

sickle-shaped blades (S series), single-intake  
with support bracket

## Curves: Air performance 50 Hz

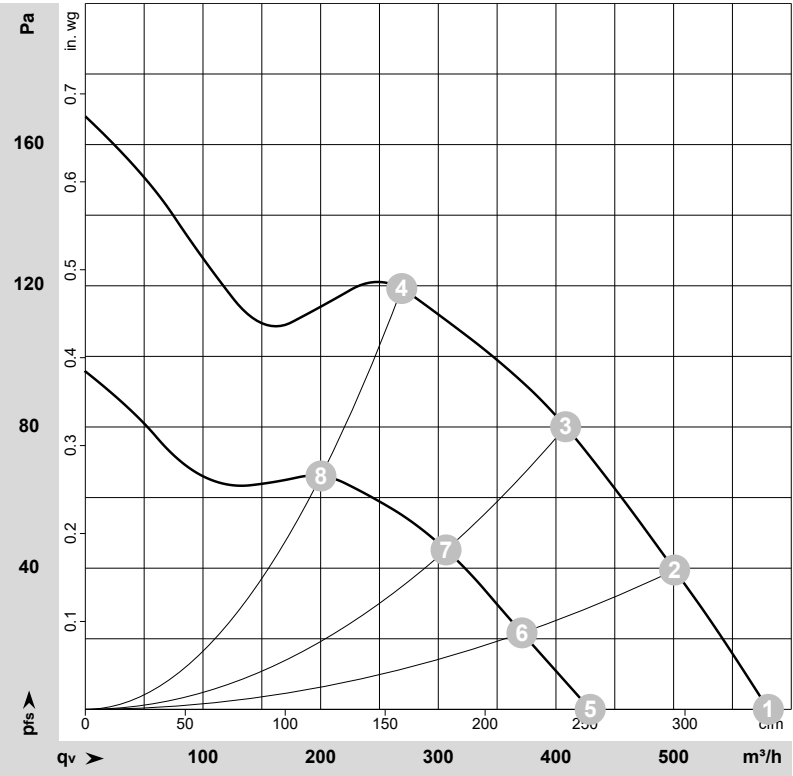

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-123220-1  
Date: 2009-12-15

Measurement: LU-123224-1  
Date: 2009-12-15

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | Stage | Wired | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub> | P <sub>ts</sub> | q <sub>v</sub> | P <sub>ts</sub> |
|---|-------|-------|-----|----|-------------------|-----------------|------|-------------------|-------------------|----------------|-----------------|----------------|-----------------|
|   |       |       | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h           | Pa              | cfm            | in. wg          |
| 1 | 1     | 1~    | 230 | 50 | 2000              | 31              | 0.24 | 56                | 63                | 580            | 0               | 340            | 0.00            |
| 2 | 1     | 1~    | 230 | 50 | 2000              | 33              | 0.26 | 55                | 62                | 500            | 40              | 295            | 0.16            |
| 3 | 1     | 1~    | 230 | 50 | 2000              | 35              | 0.30 | 55                | 62                | 410            | 80              | 240            | 0.32            |
| 4 | 1     | 1~    | 230 | 50 | 2000              | 35              | 0.27 | 57                | 64                | 270            | 120             | 160            | 0.48            |
| 5 | 2     | 1~    | 230 | 50 | 1500              | 16              | 0.13 | 48                | 56                | 430            | 0               | 250            | 0.00            |
| 6 | 2     | 1~    | 230 | 50 | 1500              | 19              | 0.14 | 48                | 55                | 370            | 22              | 220            | 0.09            |
| 7 | 2     | 1~    | 230 | 50 | 1500              | 20              | 0.17 | 47                | 54                | 305            | 45              | 180            | 0.18            |
| 8 | 2     | 1~    | 230 | 50 | 1500              | 18              | 0.13 | 49                | 57                | 200            | 67              | 120            | 0.27            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · P<sub>ts</sub> = Pressure increase