

**K3G190-RG19-01**

## EC centrifugal module - RadiCal

backward curved, single inlet  
with housing

### ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

County court Stuttgart · HRB 590142

### Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G190-RG19-01    |            |
| Motor                    | M3G055-CF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed                    | min <sup>-1</sup> | 3635       |
| Power input              | W                 | 119        |
| Current draw             | A                 | 0.9        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |


ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



## Technical features


|                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                               | 1.6 kg                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Size                                                               | 190 mm                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Surface of rotor                                                   | Thick layer passivated                                                                                                                                                                                                                                                                                                                                                                                                    |
| Material of electronics housing                                    | Die-cast aluminium                                                                                                                                                                                                                                                                                                                                                                                                        |
| Material of impeller                                               | PA plastic                                                                                                                                                                                                                                                                                                                                                                                                                |
| Number of blades                                                   | 7                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Direction of rotation                                              | Clockwise, seen on rotor                                                                                                                                                                                                                                                                                                                                                                                                  |
| Type of protection                                                 | IP54                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Insulation class                                                   | "B"                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Humidity class                                                     | F3-1                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Mounting position                                                  | Any                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Condensate discharge holes                                         | Rotor-side                                                                                                                                                                                                                                                                                                                                                                                                                |
| Operation mode                                                     | S1                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Motor bearing                                                      | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                              |
| Technical features                                                 | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Output limit</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage detection</li> </ul> |
| EMC interference immunity                                          | Acc. to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                             |
| EMC harmonics                                                      | Acc. to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                    |
| EMC interference emission                                          | Acc. to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                              |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 0.25 mA                                                                                                                                                                                                                                                                                                                                                                                                                |
| Motor protection                                                   | Locked-rotor protection                                                                                                                                                                                                                                                                                                                                                                                                   |
| Cable exit                                                         | Variable                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Protection class                                                   | I (if protective earth is connected by customer)                                                                                                                                                                                                                                                                                                                                                                          |
| Product conforming to standard                                     | EN 60335-1; CE                                                                                                                                                                                                                                                                                                                                                                                                            |

## Product drawing

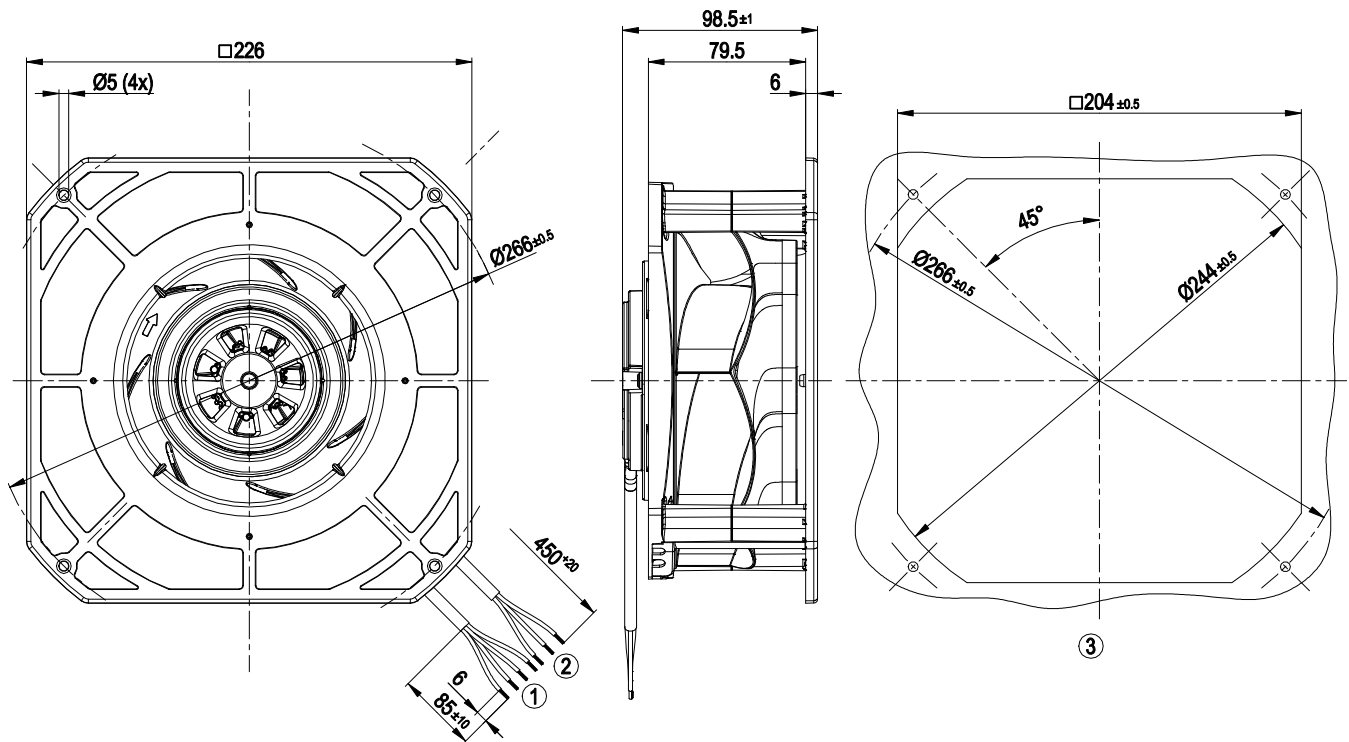


|   |                                                      |
|---|------------------------------------------------------|
| 1 | Control line PVC 4x 0.25 mm², 4x lead tips crimped   |
| 2 | Connection line PVC 3x 0.5 mm², 3x lead tips crimped |
| 3 | Mounting dimensions                                  |

## Connection screen

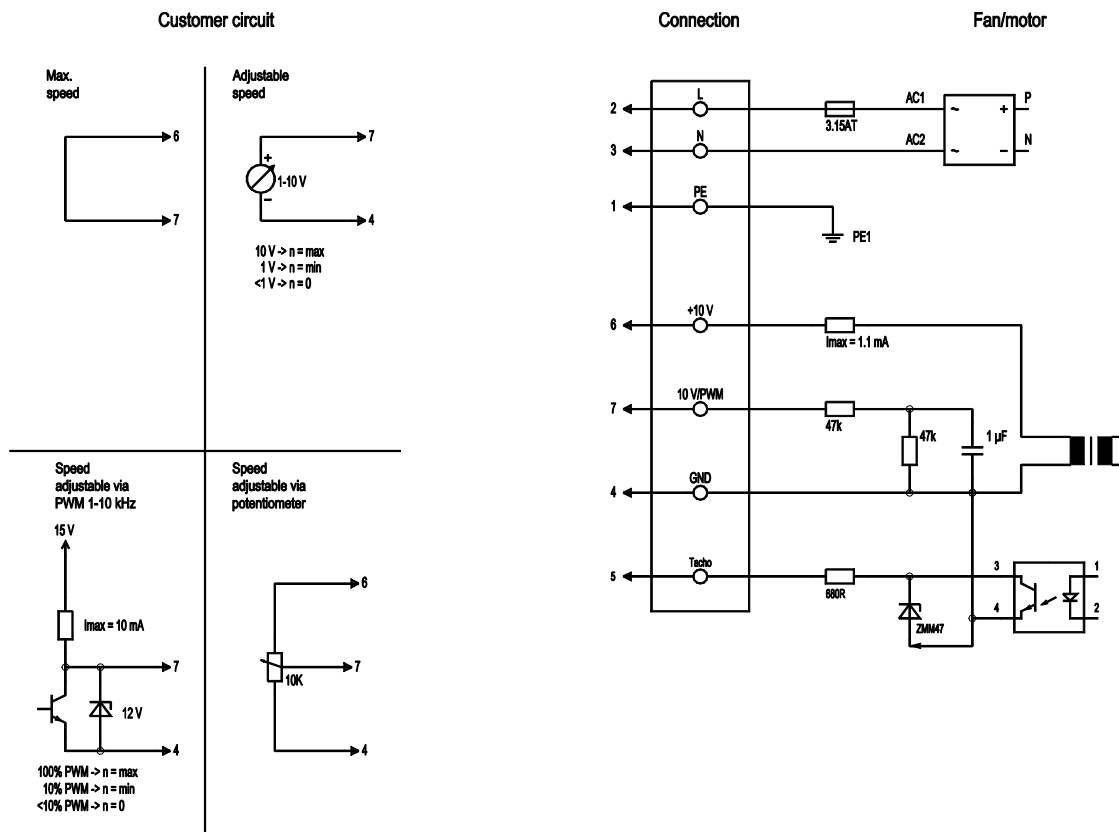

| No. | Conn.              | Designation | Colour | Function / assignment                                                                       |
|-----|--------------------|-------------|--------|---------------------------------------------------------------------------------------------|
| 2   | L                  |             |        | Power supply 230 VAC, 50-60 Hz, see type plate for voltage range                            |
| 3   | N                  |             |        | Neutral conductor                                                                           |
| 1   | PE                 |             |        | Protective earth                                                                            |
| 7   | 0-10V PWM          |             | yellow | Control input 0-10 V or PWM, electrically isolated                                          |
| 5   | Tacho              |             | white  | Tach output: Open collector, 1 pulse per revolution, electrically isolated, Isink_max=10 mA |
| 6   | 10 V / max. 1,1 mA |             | red    | Voltage output 10 V, 1.1 mA, electrically isolated                                          |
| 4   | GND                |             | blue   | GND connection for control interface                                                        |

## Charts: Air flow 50 Hz

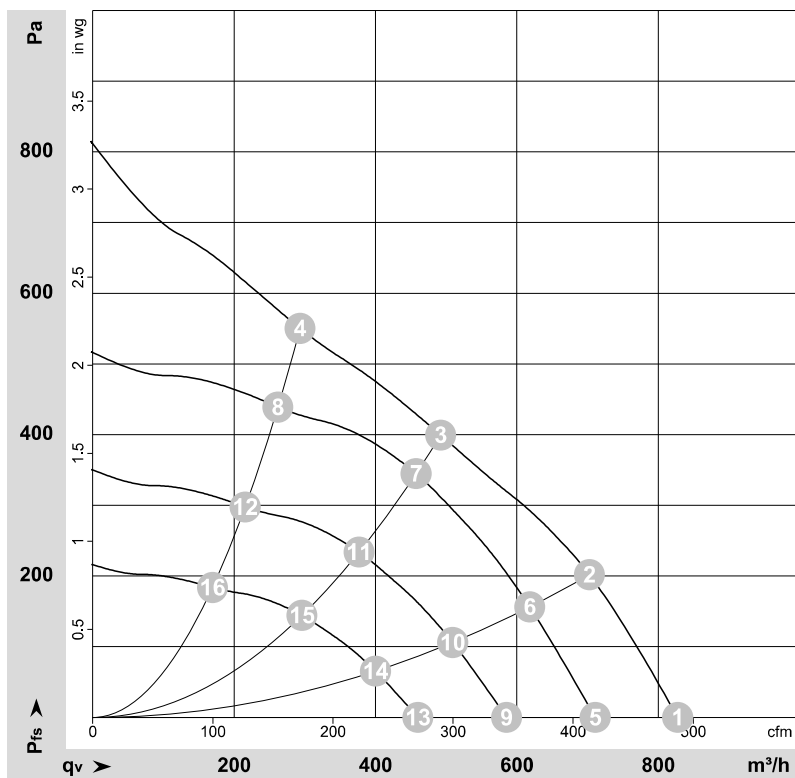

$$\rho = 1,15 \text{ kg/m}^3 \pm 2\%$$

Measurement: LU-168963

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: LwA measured as per ISO 13347 /  
LpA measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | qv   | P <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | m³/h | Pa              |
| 1  | 230 | 50 | 3960              | 110             | 0.90 | 825  | 0               |
| 2  | 230 | 50 | 3870              | 119             | 0.90 | 705  | 200             |
| 3  | 230 | 50 | 3635              | 119             | 0.90 | 490  | 400             |
| 4  | 230 | 50 | 3805              | 119             | 0.90 | 295  | 550             |
| 5  | 230 | 50 | 3400              | 69              | 0.59 | 710  | 0               |
| 6  | 230 | 50 | 3400              | 78              | 0.65 | 620  | 157             |
| 7  | 230 | 50 | 3400              | 96              | 0.79 | 455  | 347             |
| 8  | 230 | 50 | 3400              | 85              | 0.71 | 260  | 439             |
| 9  | 230 | 50 | 2800              | 39              | 0.33 | 585  | 0               |
| 10 | 230 | 50 | 2800              | 43              | 0.36 | 510  | 107             |
| 11 | 230 | 50 | 2800              | 54              | 0.44 | 375  | 235             |
| 12 | 230 | 50 | 2800              | 47              | 0.40 | 215  | 297             |
| 13 | 230 | 50 | 2200              | 19              | 0.16 | 460  | 0               |
| 14 | 230 | 50 | 2200              | 21              | 0.18 | 400  | 66              |
| 15 | 230 | 50 | 2200              | 26              | 0.21 | 295  | 145             |
| 16 | 230 | 50 | 2200              | 23              | 0.19 | 170  | 184             |

U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · qv = Air flow · P<sub>fs</sub> = Pressure increase

