

K4E146-AB73-19

# AC dual centrifugal fan

forward-curved, single-intake

with housing

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                             |                   |         |         |
|-----------------------------|-------------------|---------|---------|
| Type                        | K4E146-AB73-19    |         |         |
| Motor                       | M4E068-DF         |         |         |
| Phase                       |                   | 1~      | 1~      |
| Nominal voltage             | VAC               | 230     | 230     |
| Frequency                   | Hz                | 50      | 60      |
| Method of obtaining data    |                   | ml      | ml      |
| Valid for approval/standard |                   | CE      | CE      |
| Speed (rpm)                 | min <sup>-1</sup> | 1135    | 1100    |
| Power consumption           | W                 | 71      | 95      |
| Current draw                | A                 | 0.31    | 0.42    |
| Capacitor                   | µF                | 2.5     | 2.5     |
| Capacitor voltage           | VDB               | 450     | 450     |
| Capacitor standard          |                   | S2 (CE) | S2 (CE) |
| Min. back pressure          | Pa                | 70      | 60      |
| Min. back pressure          | in. wg            | 0.28    | 0.24    |
| Min. ambient temperature    | °C                | -25     | -25     |
| Max. ambient temperature    | °C                | 60      | 40      |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



# AC dual centrifugal fan

forward-curved, single-intake  
with housing

## Technical description


|                                                                            |                                                       |
|----------------------------------------------------------------------------|-------------------------------------------------------|
| Weight                                                                     | 4.0 kg                                                |
| Size                                                                       | 146 mm                                                |
| Motor size                                                                 | 68                                                    |
| Terminal box material                                                      | PP plastic                                            |
| Impeller material                                                          | PP plastic                                            |
| Housing material                                                           | PP plastic                                            |
| Motor suspension                                                           | Motor vibration-damped on both sides                  |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                        |
| Degree of protection                                                       | IP44; installation- and position-dependent            |
| Insulation class                                                           | "F"                                                   |
| Moisture (F) / Environmental (H) protection class                          | H0 - dry environment                                  |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                               |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                               |
| Installation position                                                      | Any                                                   |
| Condensation drainage holes                                                | None                                                  |
| Mode                                                                       | S1                                                    |
| Motor bearing                                                              | Ball bearing                                          |
| Speed levels                                                               | 5                                                     |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA                                             |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected |
| With cable                                                                 | Variable                                              |
| Protection class                                                           | I (with customer connection of protective earth)      |
| Motor capacitor according to EN 60252-1 in safety protection class         | S2                                                    |
| Conformity with standards                                                  | EN 60335-1; CE                                        |



# AC dual centrifugal fan

forward-curved, single-intake  
with housing

## Product drawing

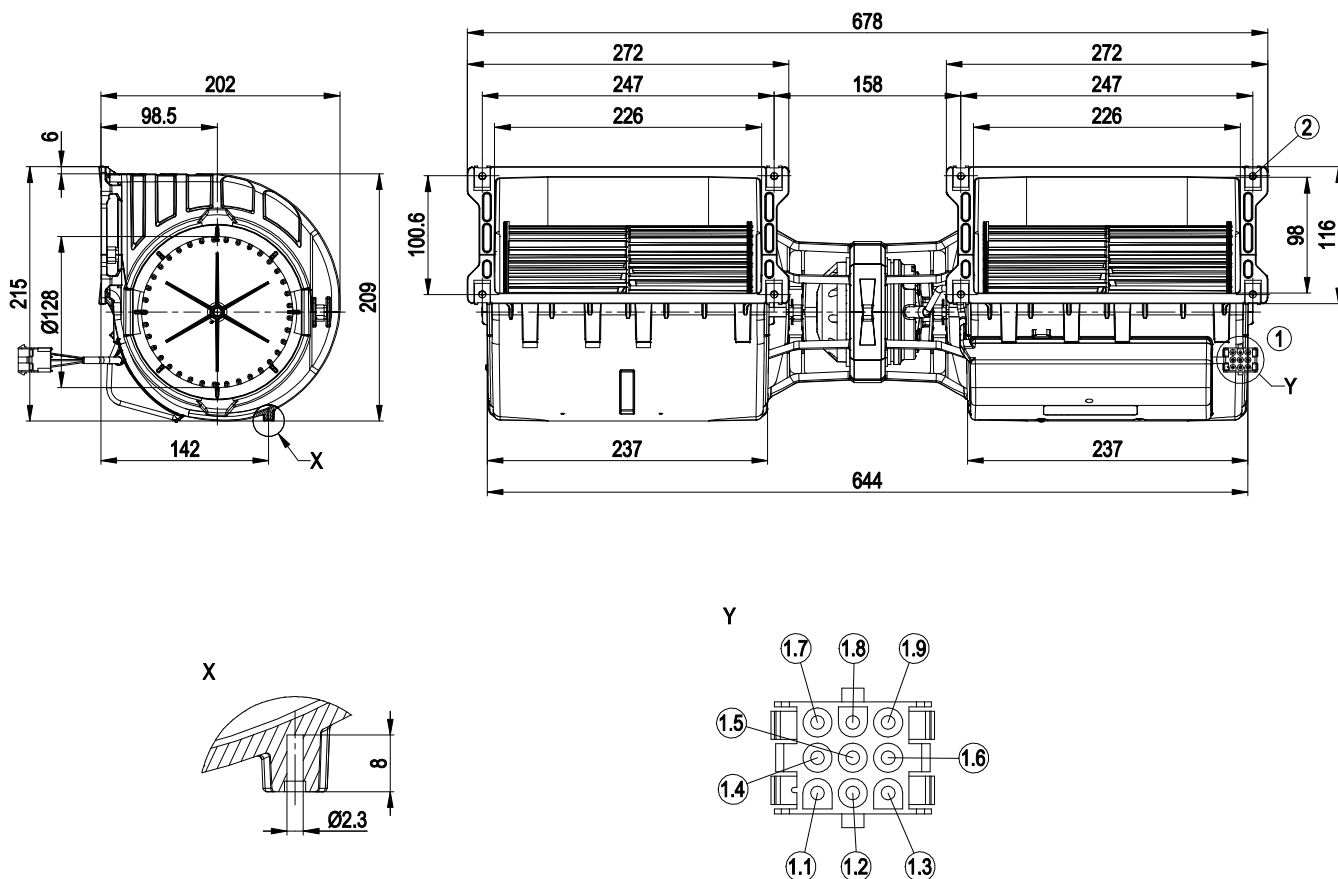


|     |                                                                                                                                     |
|-----|-------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Cable ETFE AWG20, 1x plug pin tyco 926886-1, cable ETFE AWG22, 6x plug pin tyco 926886-1, 1x 9-pole connector housing tyco 927231-5 |
| 1.1 | Step 1 (min.)                                                                                                                       |
| 1.2 | Step 2                                                                                                                              |
| 1.3 | Step 3                                                                                                                              |
| 1.4 | Step 4                                                                                                                              |
| 1.5 | Step 5 (max.)                                                                                                                       |
| 1.6 | -                                                                                                                                   |
| 1.7 | -                                                                                                                                   |
| 1.8 | N                                                                                                                                   |
| 1.9 | Protective earth                                                                                                                    |
| 2   | 8x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus material thickness of attachment)                   |



# AC dual centrifugal fan

forward-curved, single-intake  
with housing

## Connection diagram

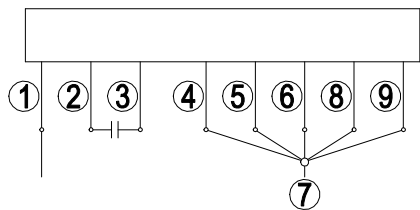

Note: High speed (step V); low speed (step I); the switch must interrupt the circuit on switching.


|   |              |   |                |   |               |
|---|--------------|---|----------------|---|---------------|
| 1 | = N = blue   | 2 | brown          | 3 | yellow        |
| 4 | Step I white | 5 | Step II red    | 6 | Step III gray |
| 7 | L1           | 8 | Step IV orange | 9 | Step V black  |



# AC dual centrifugal fan

forward-curved, single-intake  
with housing

## Curves: Air performance 50 Hz

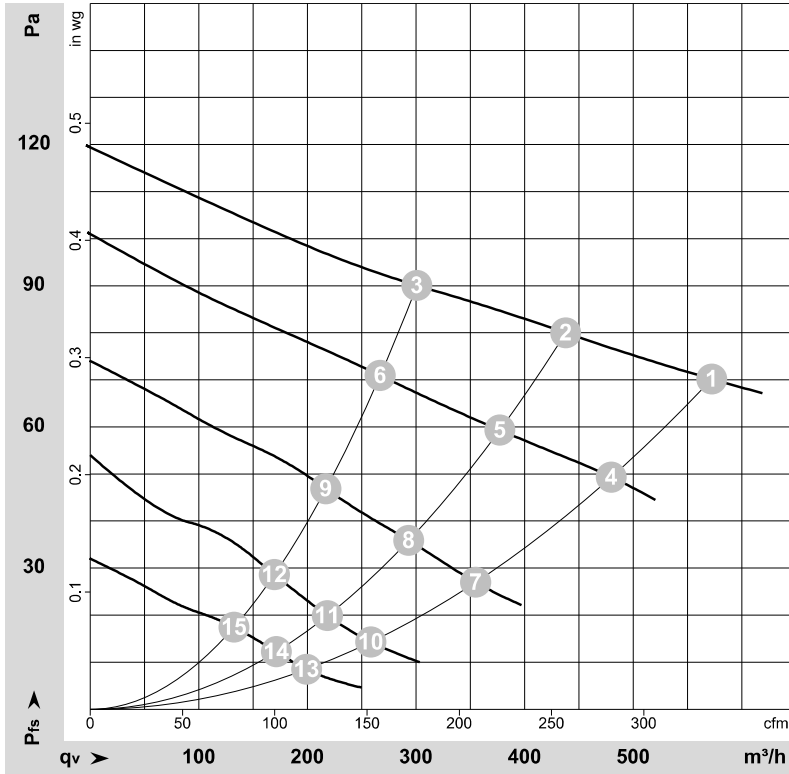

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-103355-1  
Measurement: LU-73391-1  
Measurement: LU-73392-1  
Measurement: LU-73393-1  
Measurement: LU-73395-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.


## Measured values

|    | Stage | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|----------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | m³/h           | Pa              | cfm            | in. wg          |
| 1  | 5     | 230 | 50 | 1135              | 71             | 0.31 | 46                | 56                | 56                 | 570            | 70              | 335            | 0.28            |
| 2  | 5     | 230 | 50 | 1225              | 67             | 0.29 | 46                | 56                | 57                 | 440            | 80              | 260            | 0.32            |
| 3  | 5     | 230 | 50 | 1290              | 63             | 0.27 | 46                | 56                | 56                 | 300            | 90              | 175            | 0.36            |
| 4  | 4     | 230 | 50 | 965               | 55             | 0.25 |                   |                   |                    | 480            | 50              | 285            | 0.20            |
| 5  | 4     | 230 | 50 | 1045              | 53             | 0.24 |                   |                   |                    | 375            | 59              | 220            | 0.24            |
| 6  | 4     | 230 | 50 | 1140              | 49             | 0.23 |                   |                   |                    | 265            | 71              | 155            | 0.29            |
| 7  | 3     | 230 | 50 | 720               | 45             | 0.21 |                   |                   |                    | 355            | 27              | 210            | 0.11            |
| 8  | 3     | 230 | 50 | 820               | 43             | 0.21 |                   |                   |                    | 295            | 36              | 170            | 0.14            |
| 9  | 3     | 230 | 50 | 930               | 41             | 0.20 |                   |                   |                    | 215            | 47              | 130            | 0.19            |
| 10 | 2     | 230 | 50 | 540               | 14             | 0.15 |                   |                   |                    | 260            | 14              | 150            | 0.06            |
| 11 | 2     | 230 | 50 | 620               | 14             | 0.15 |                   |                   |                    | 220            | 20              | 130            | 0.08            |
| 12 | 2     | 230 | 50 | 730               | 14             | 0.15 |                   |                   |                    | 170            | 29              | 100            | 0.12            |
| 13 | 1     | 230 | 50 | 410               | 9.0            | 0.13 |                   |                   |                    | 200            | 8               | 115            | 0.03            |
| 14 | 1     | 230 | 50 | 480               | 9.0            | 0.13 |                   |                   |                    | 170            | 12              | 100            | 0.05            |
| 15 | 1     | 230 | 50 | 575               | 10.0           | 0.13 |                   |                   |                    | 130            | 17              | 80             | 0.07            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase



## Curves: Air performance 60 Hz

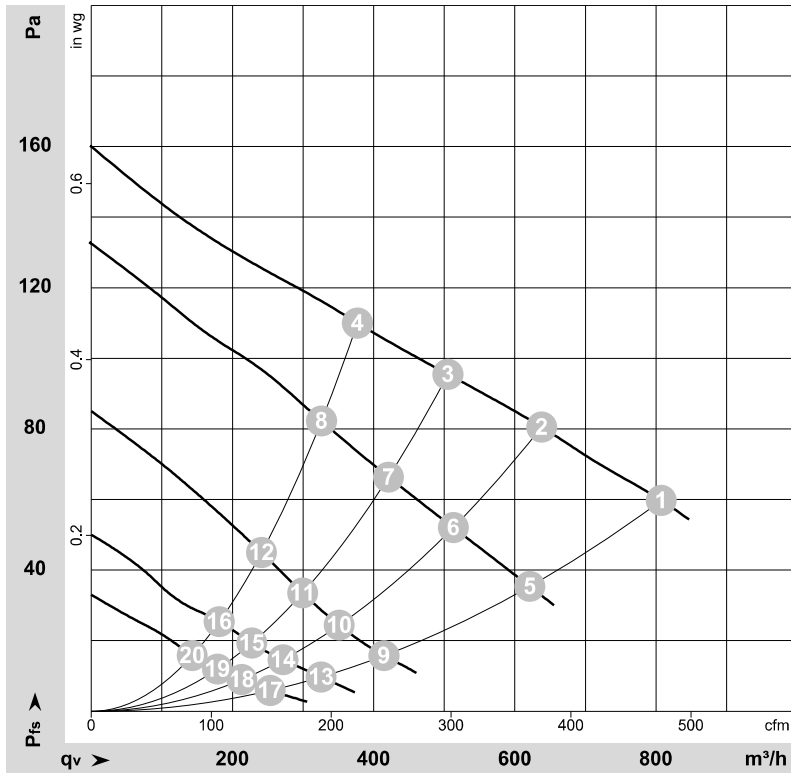

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-73399-1  
Measurement: LU-73400-1  
Measurement: LU-73398-1  
Measurement: LU-73397-1  
Measurement: LU-73396-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Stage | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-------|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 5     | 230 | 60 | 1100              | 95             | 0.42 | 805               | 60              | 475            | 0.24            |
| 2  | 5     | 230 | 60 | 1235              | 93             | 0.40 | 640               | 80              | 375            | 0.32            |
| 3  | 5     | 230 | 60 | 1325              | 90             | 0.40 | 505               | 95              | 295            | 0.38            |
| 4  | 5     | 230 | 60 | 1410              | 88             | 0.38 | 375               | 110             | 220            | 0.44            |
| 5  | 4     | 230 | 60 | 850               | 65             | 0.32 | 620               | 35              | 365            | 0.14            |
| 6  | 4     | 230 | 60 | 985               | 62             | 0.31 | 515               | 52              | 300            | 0.21            |
| 7  | 4     | 230 | 60 | 1100              | 60             | 0.31 | 420               | 66              | 250            | 0.26            |
| 8  | 4     | 230 | 60 | 1215              | 58             | 0.30 | 325               | 82              | 190            | 0.33            |
| 9  | 3     | 230 | 60 | 580               | 48             | 0.25 | 415               | 16              | 245            | 0.06            |
| 10 | 3     | 230 | 60 | 695               | 47             | 0.25 | 350               | 24              | 205            | 0.10            |
| 11 | 3     | 230 | 60 | 800               | 46             | 0.24 | 300               | 33              | 175            | 0.13            |
| 12 | 3     | 230 | 60 | 930               | 44             | 0.24 | 240               | 45              | 140            | 0.18            |
| 13 | 2     | 230 | 60 | 450               | 17             | 0.18 | 325               | 10              | 190            | 0.04            |
| 14 | 2     | 230 | 60 | 535               | 17             | 0.18 | 270               | 15              | 160            | 0.06            |
| 15 | 2     | 230 | 60 | 610               | 17             | 0.18 | 225               | 19              | 135            | 0.08            |
| 16 | 2     | 230 | 60 | 700               | 17             | 0.18 | 180               | 26              | 105            | 0.10            |
| 17 | 2     | 230 | 60 | 370               | 11             | 0.15 | 255               | 6               | 150            | 0.02            |
| 18 | 2     | 230 | 60 | 430               | 11             | 0.15 | 215               | 9               | 125            | 0.04            |
| 19 | 2     | 230 | 60 | 485               | 11             | 0.15 | 180               | 12              | 105            | 0.05            |
| 20 | 2     | 230 | 60 | 550               | 11             | 0.15 | 145               | 16              | 85             | 0.06            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

