


Research Data

Air-flow rate[m ³ /h]	11951
Pressure[Pa]	1597
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC714ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	-
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	11
IP	55
INS	



PMM-Q714ATEX

PP-el antistatic welded housing -PP-el/INOX welded impeller - epoxy painted motor support - stainless steel

Certificazioni

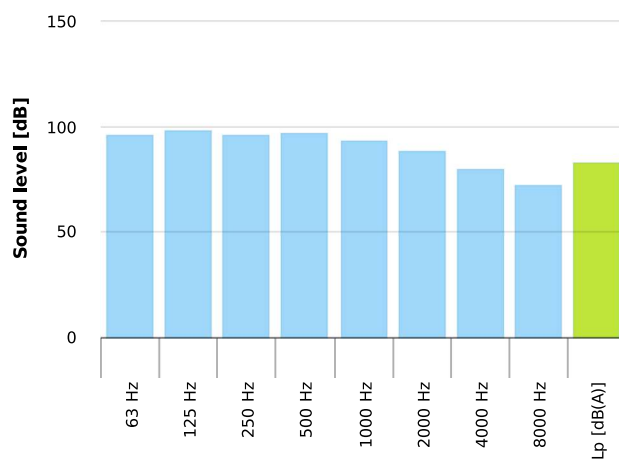
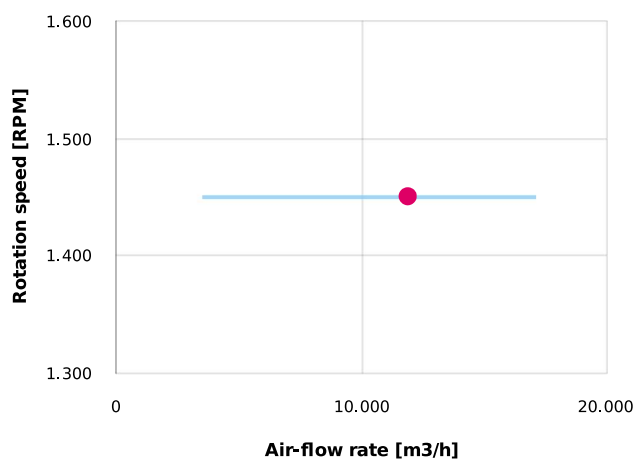
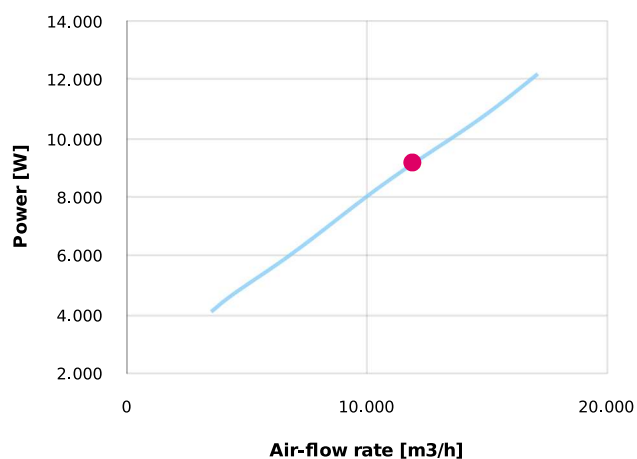
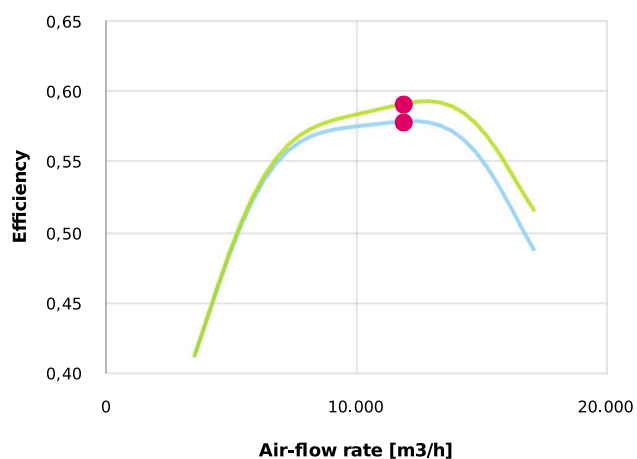
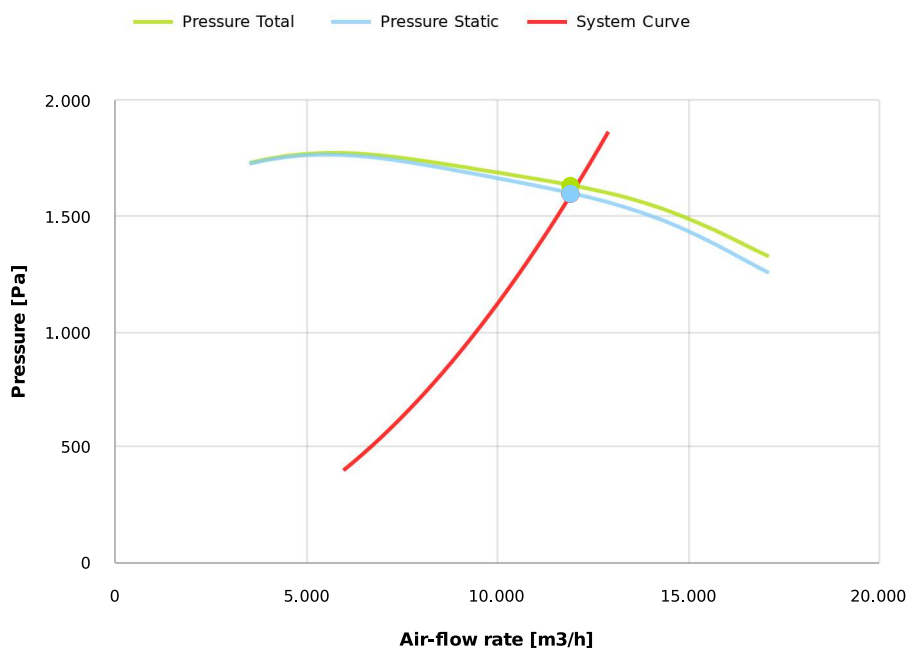


Table engines

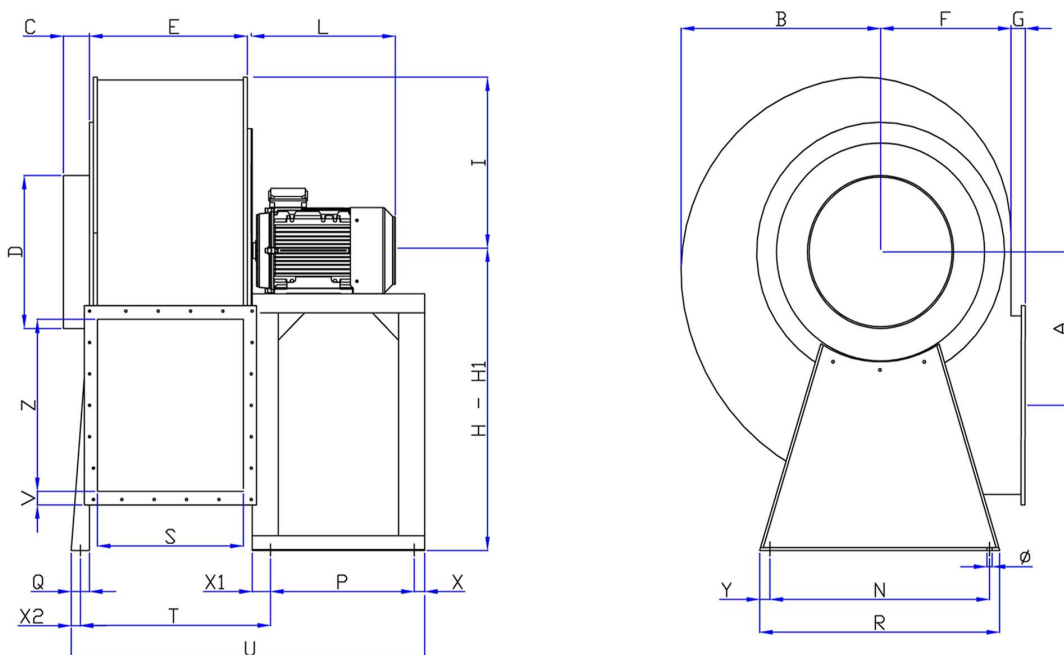
Class IE	IE1	IE2	IE3
Size	160M	160M	160M
Power[kW]	11	11	11
Current[A]	20.64	21	20.4
Voltage[V]	400	400	400
Cos φ	0.86	0.84	0.85
n	0.884	0.898	0.914

Working point

Q [m³/h]	11951
P_{sta} [Pa]	1597.
P_{tot} [Pa]	1632.
P_{in} [kW] [W]	9158.
n_{sta}	0.578
n_{tot}	0.591
Rpm	1450


















Dimensions



A	B	C	D	E	F	G	H	H1	I	L	N	Ø	P
527	690	100	500	430	450	50	850	700	571	550	772	20	551
Q	R	S	T	U	V	X	X1	X2	Y	Z			
60	850	420	560	1300	50	40	60	30	40	520			

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
