

Research Data


Air-flow rate[m ³ /h]	346.2
Pressure[Pa]	540.3
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC202ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	17
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	0.25
IP	55
INS	

Table engines

Class IE	IE1
Size	63
Power[kW]	0.25
Current[A]	0.71
Voltage[V]	400
Cos φ	0.78
n	0.65



PMM202ATEX






Pe-el antistatic housing - PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni




Working point

Q [m ³ /h]	346.2
P _{sta} [Pa]	540.3
P _{tot} [Pa]	549.7
P _{in} [kW] [W]	92.23
n _{sta}	0.563
n _{tot}	0.573
Rpm	2850

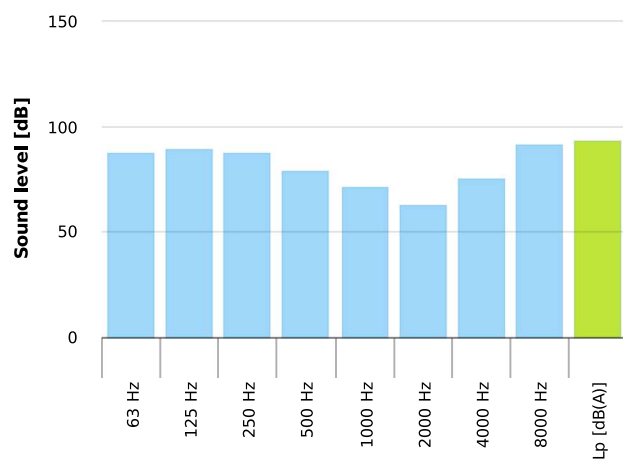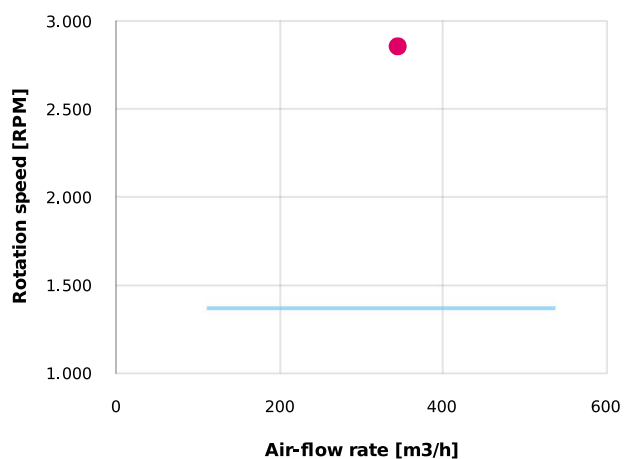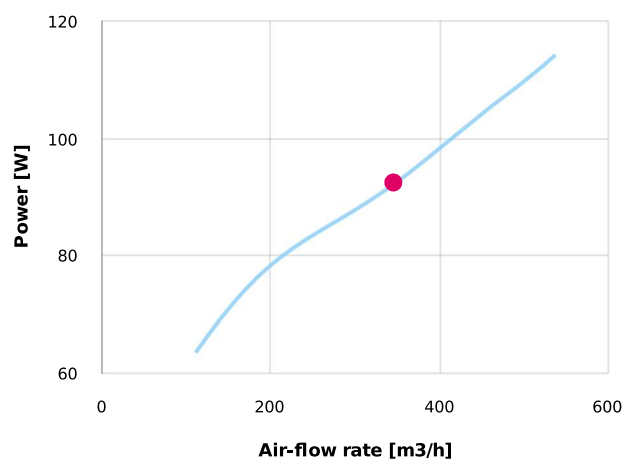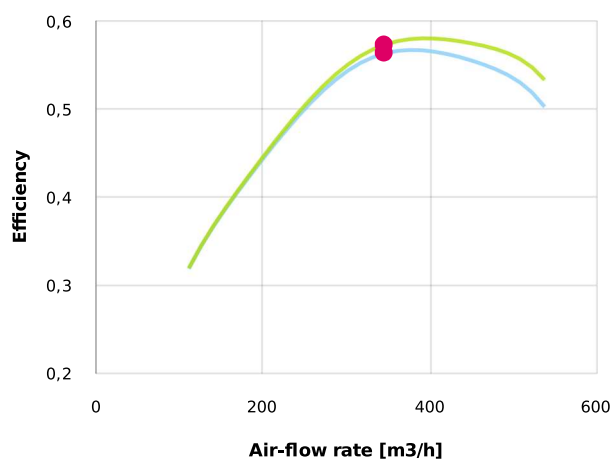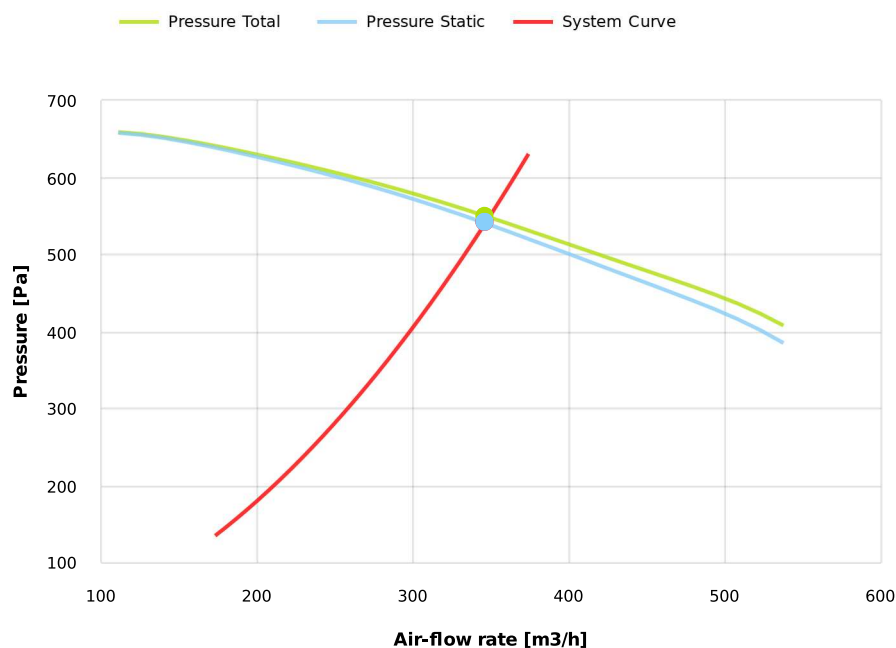

Dimensions

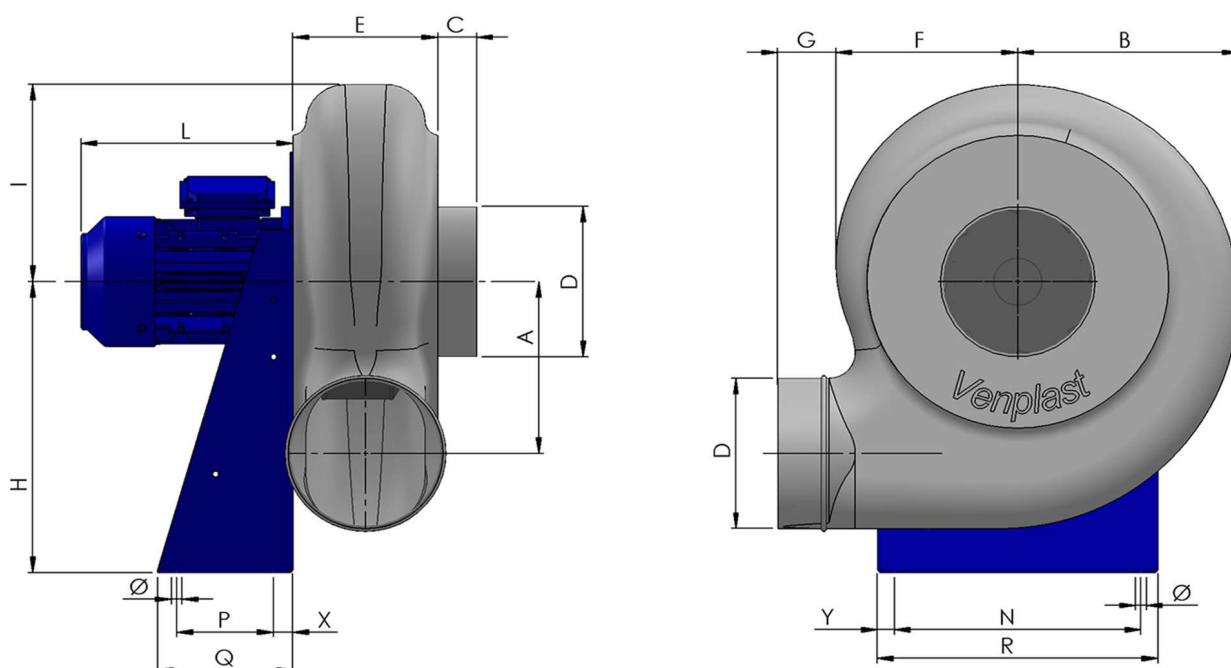

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
142	187	40	125	120	150	60	250	165	195	200	11	100	140
R				X				Y					
235				20				17.5					

Configurations & cad

