


Research Data

Air-flow rate[m ³ /h]	912.5
Pressure[Pa]	359.1
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC314ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	30
Frequency[Hz]	50
Speed[rpm]	1400
Power[kW]	0.25
IP	55
INS	



PMM314ATEX

Pe-el antistatic housing - PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





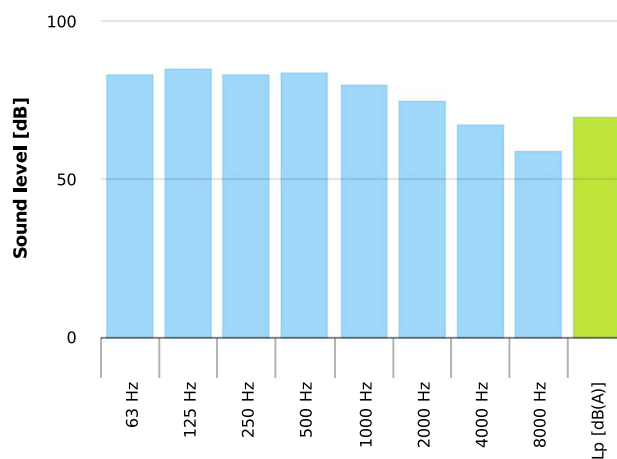


Table engines


Class IE	IE1
Size	71
Power[kW]	0.25
Current[A]	0.84
Voltage[V]	400
Cos φ	0.72
n	0.6

Working point

Q [m ³ /h]	912.5
P _{sta} [Pa]	359.1
P _{tot} [Pa]	369.0
P _{in} [kW] [W]	137.4
n _{sta}	0.661
n _{tot}	0.679
Rpm	1400

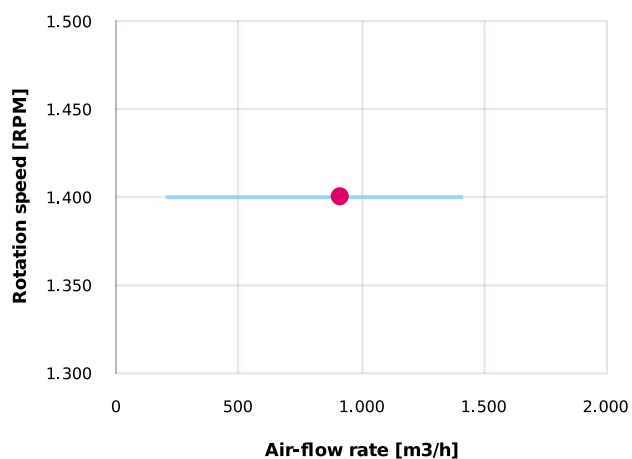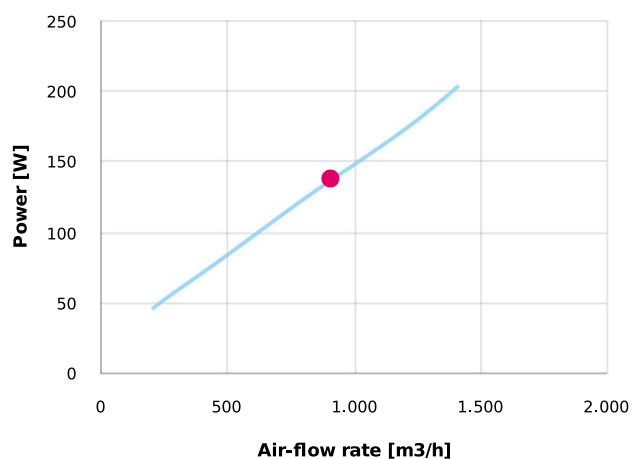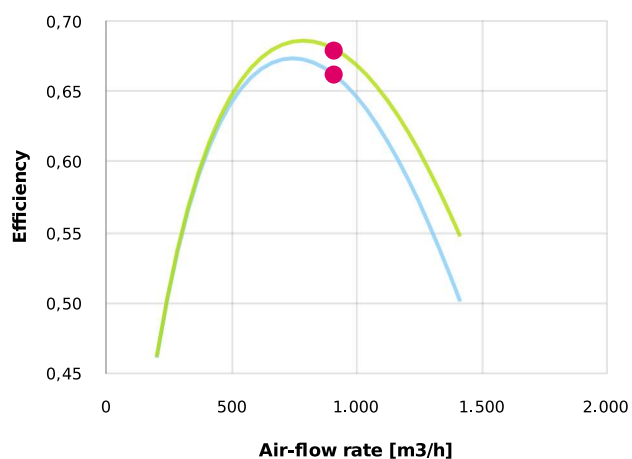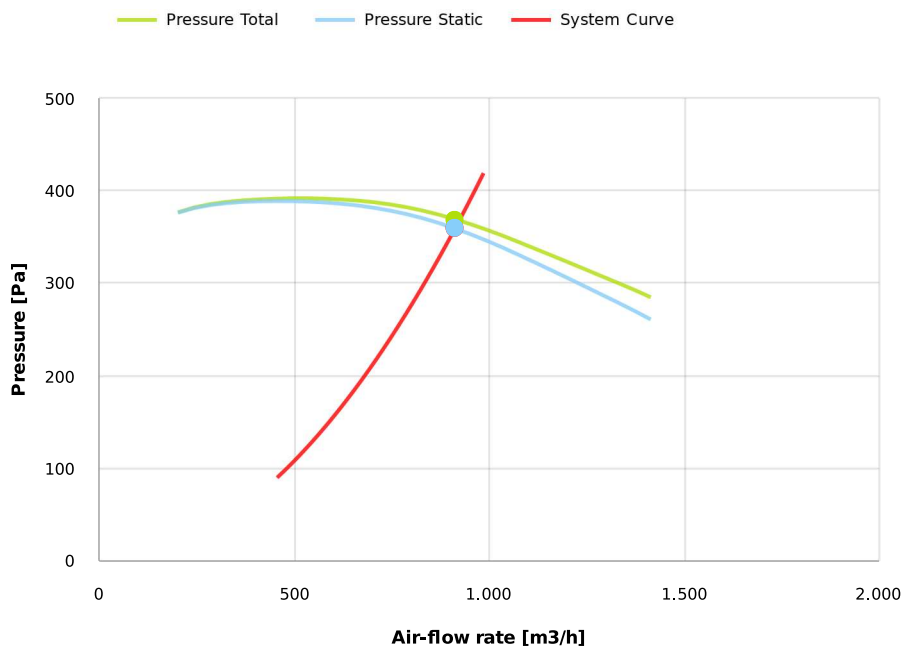

Dimensions

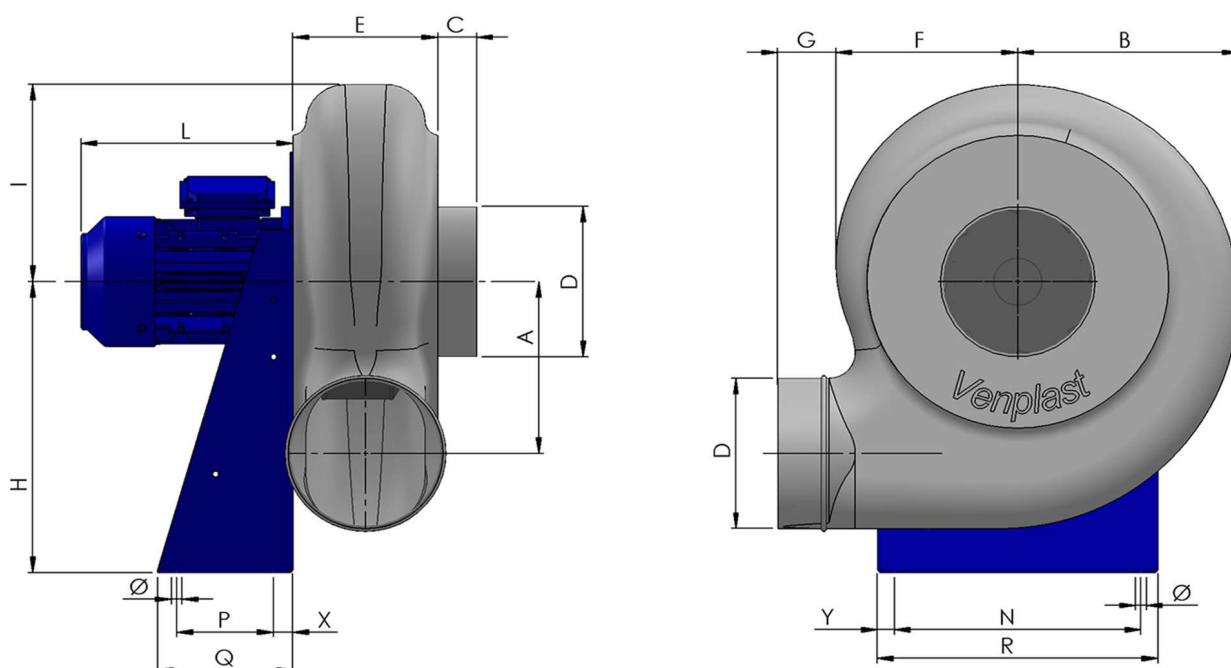

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
230	310	40	200	170	220	60	410	245	210	320	11	150	230
R				X				Y					
355				40				175					

Configurations & cad

