


Research Data

Air-flow rate[m ³ /h]	606
Pressure[Pa]	158.4
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC316ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	30
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.12
IP	55
INS	



PMM316ATEX

Pe-el antistatic housing - PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni




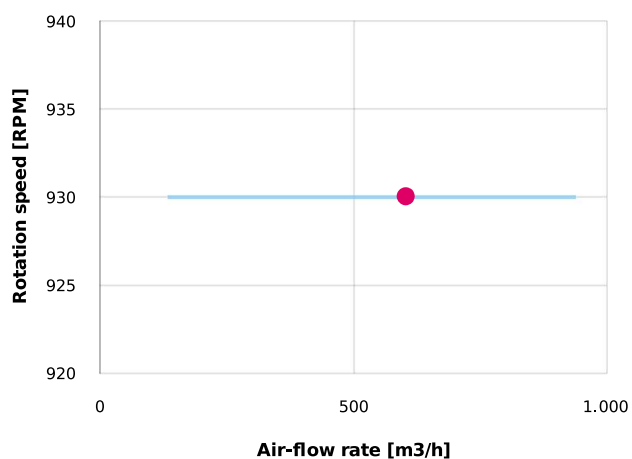


Table engines



Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.62
Voltage[V]	400
Cos φ	0.62
n	0.45

Working point

Q [m ³ /h]	606
P _{sta} [Pa]	158.4
P _{tot} [Pa]	162.8
P _{in} [kW] [W]	40.28
n _{sta}	0.661
n _{tot}	0.679
Rpm	930

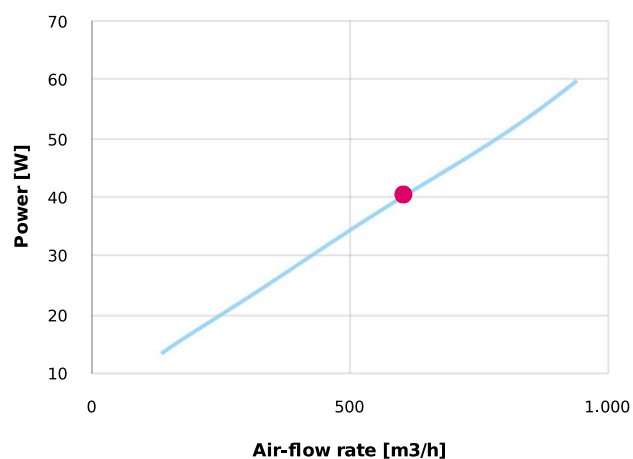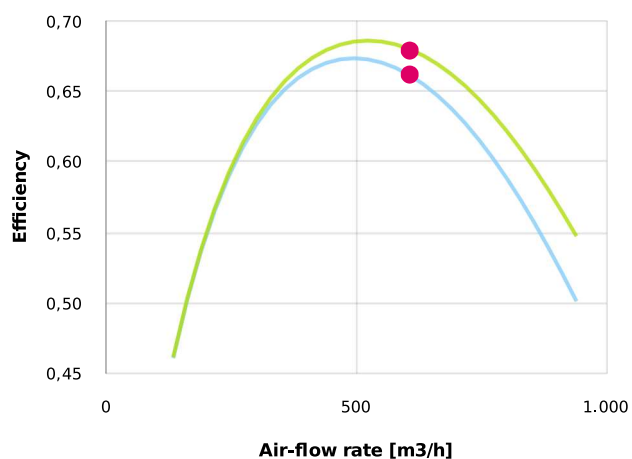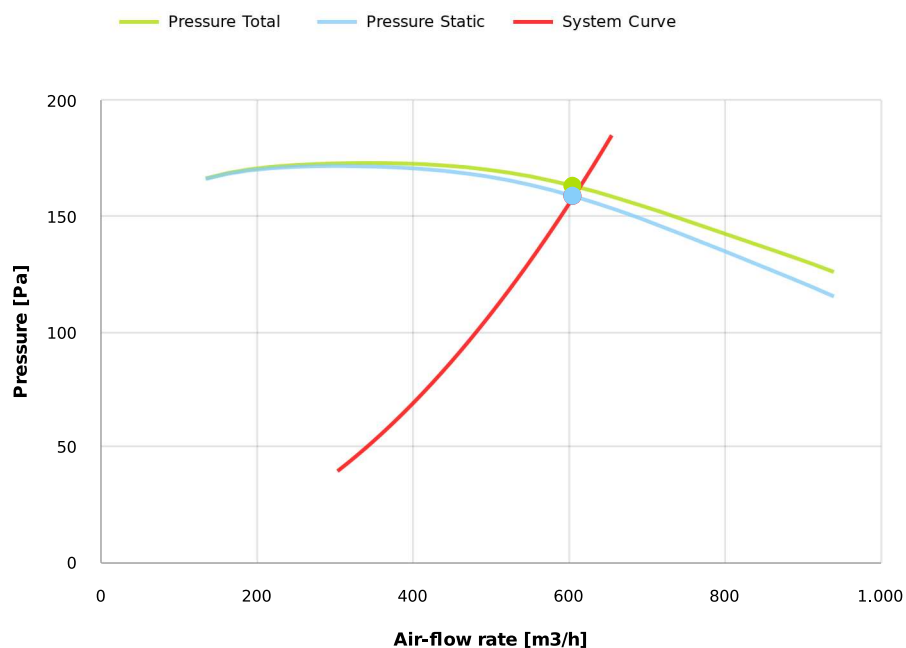


Dimensions

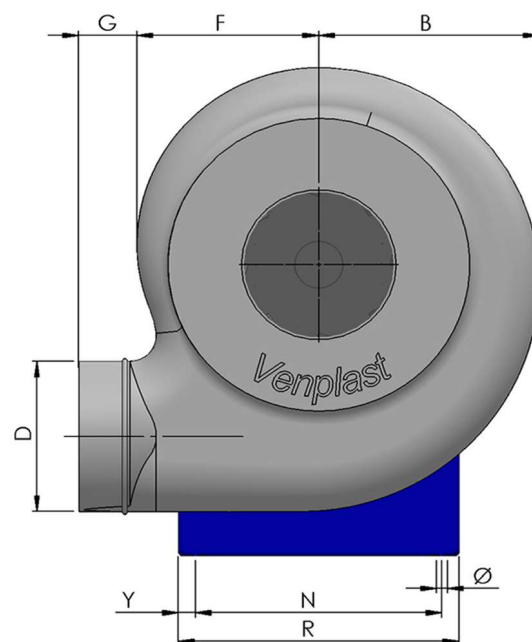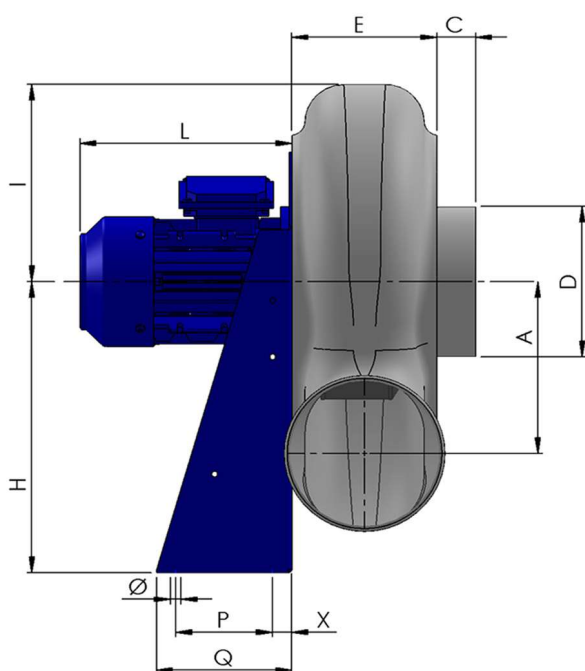


A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
230	310	40	200	170	220	60	410	245	210	320	11	150	230
R				X				Y					
355				40				175					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

