


Research Data

Air-flow rate[m ³ /h]	3336
Pressure[Pa]	2437
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC402ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	63
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	4
IP	55
INS	



PMM402ATEX

Pe-el antistatic housing - PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





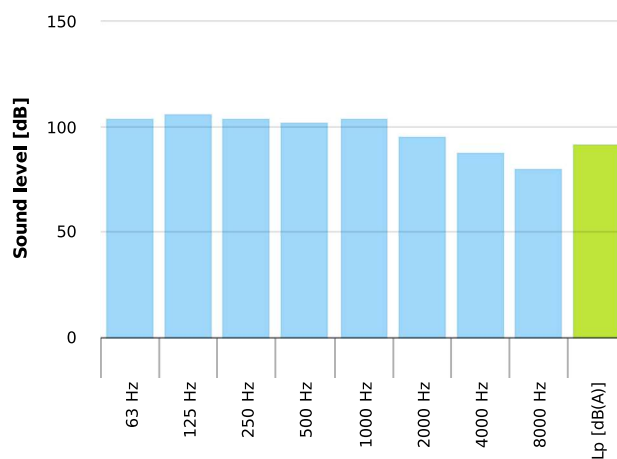


Table engines



Class IE	IE1	IE2	IE3
Size	112M	112M	112M
Power[kW]	4	4	4
Current[A]	7.88	7.73	7.3
Voltage[V]	400	400	400
Cos φ	0.87	0.87	0.9
n	0.842	0.858	0.881

Working point

Q [m ³ /h]	3336
P _{sta} [Pa]	2437.
P _{tot} [Pa]	2491.
P _{in} [kW] [W]	3412.
n _{sta}	0.662
n _{tot}	0.677
Rpm	2850

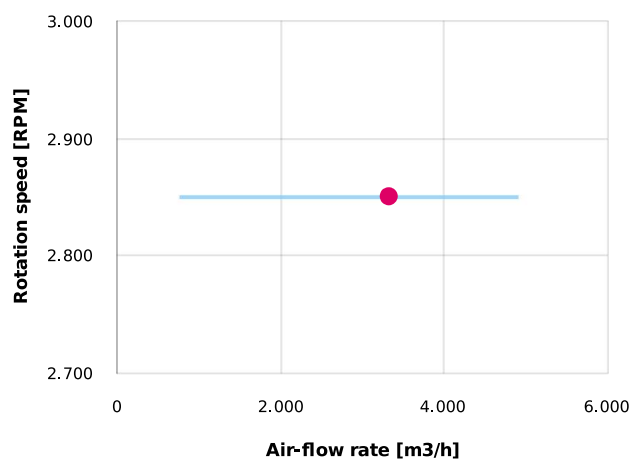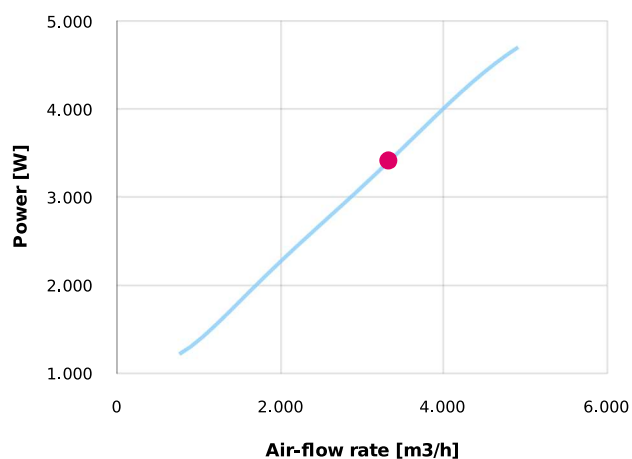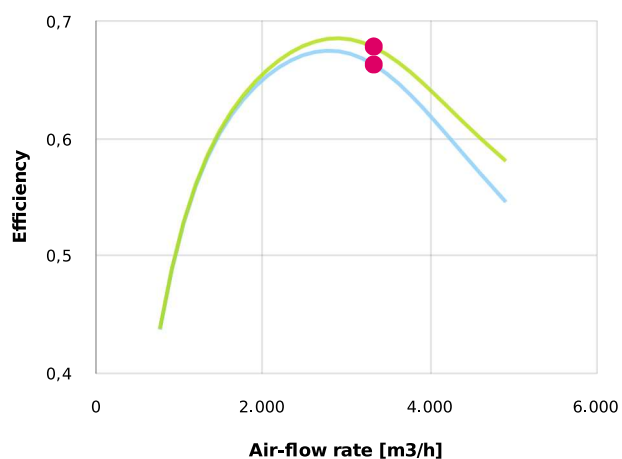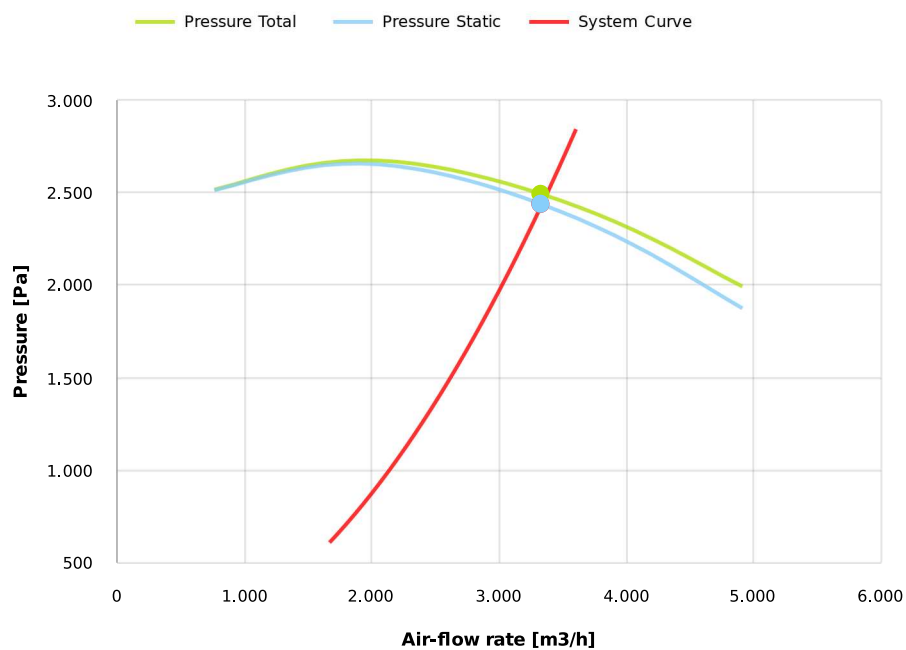


Dimensions

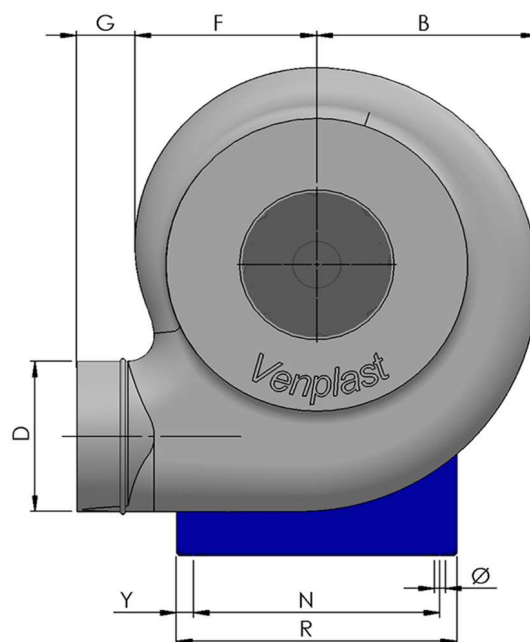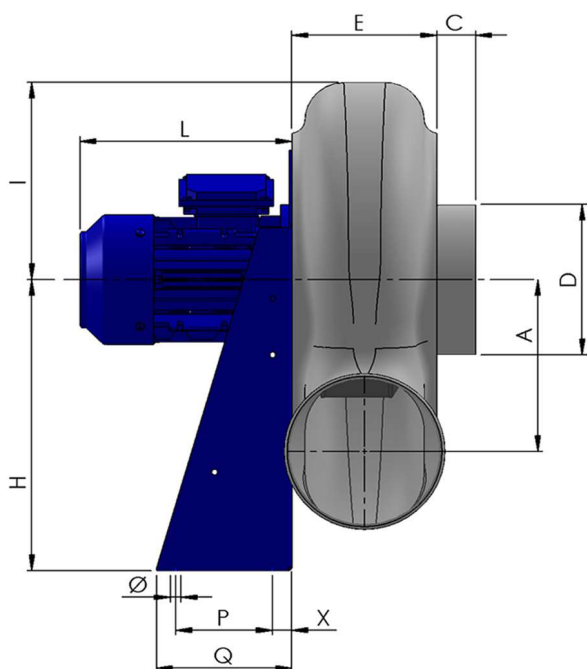


A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
290	380	40	250	194	265	80	495	330	325	330	11	270	315
R				X				Y					
365				40				20					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

