


Research Data

Air-flow rate[m ³ /h]	743.3
Pressure[Pa]	300.5
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P202ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	17
Frequency[Hz]	50
Speed[rpm]	2750
Power[kW]	0.18
IP	55
INS	



PRU202ATEX

Pe-el antistatic housing -PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





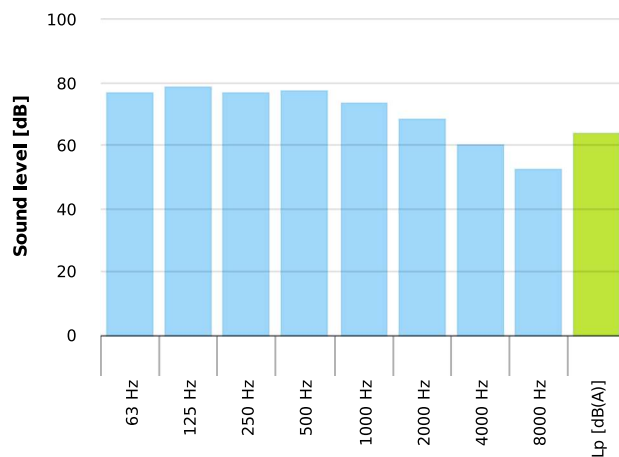


Table engines


Class IE	IE1
Size	63
Power[kW]	0.18
Current[A]	0.55
Voltage[V]	400
Cos φ	0.75
n	0.63

Working point

Q [m³/h]	743.3
P_{sta} [Pa]	300.5
P_{tot} [Pa]	316.6
P_{in} [kW] [W]	80.74
n_{sta}	0.768
n_{tot}	0.809
Rpm	2750

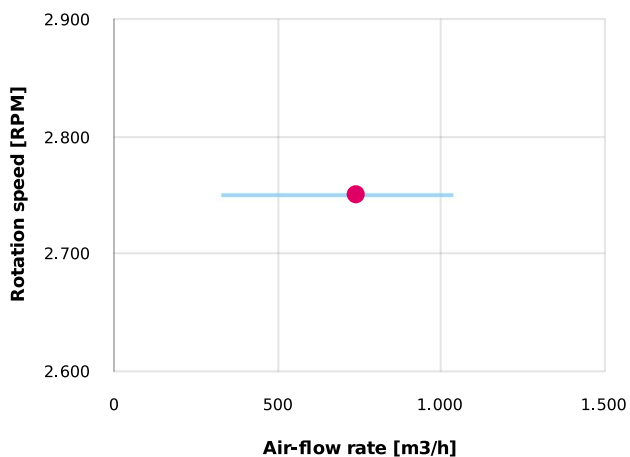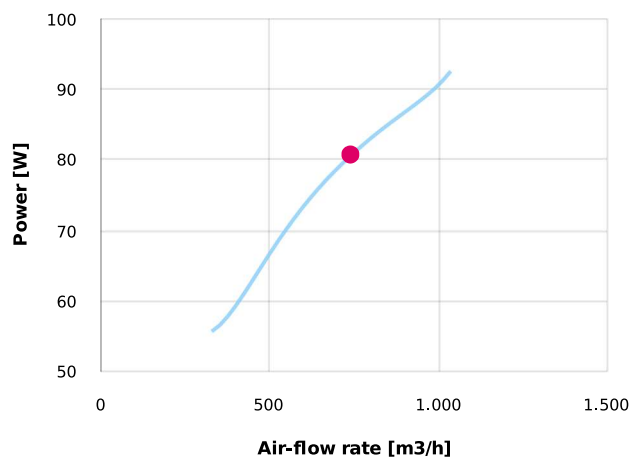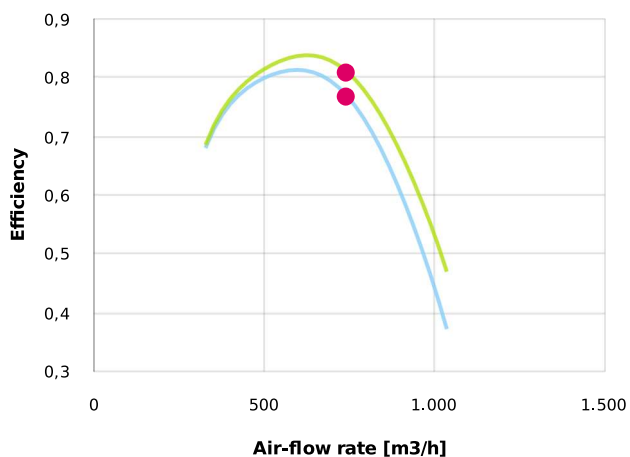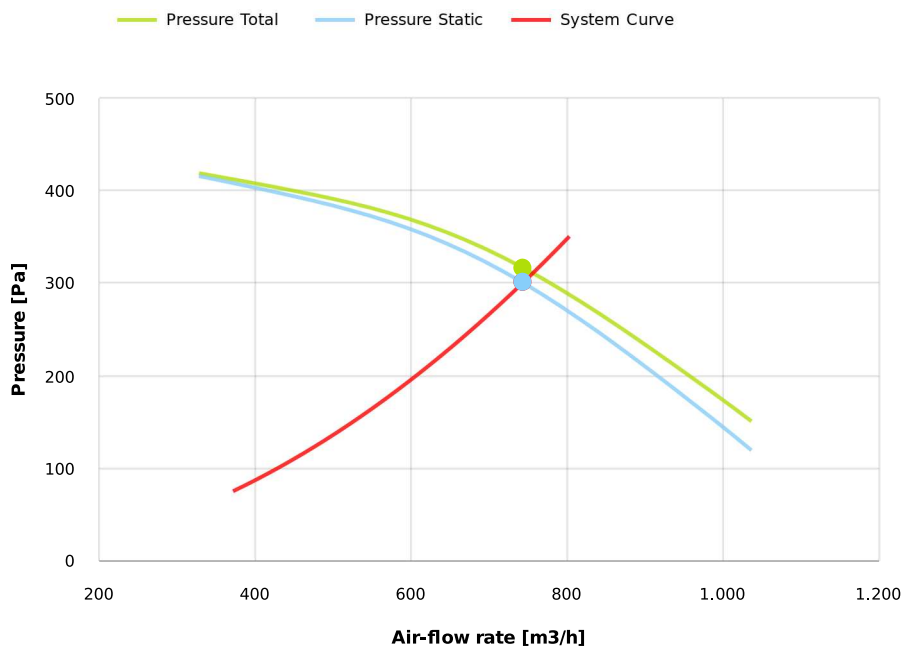

Dimensions

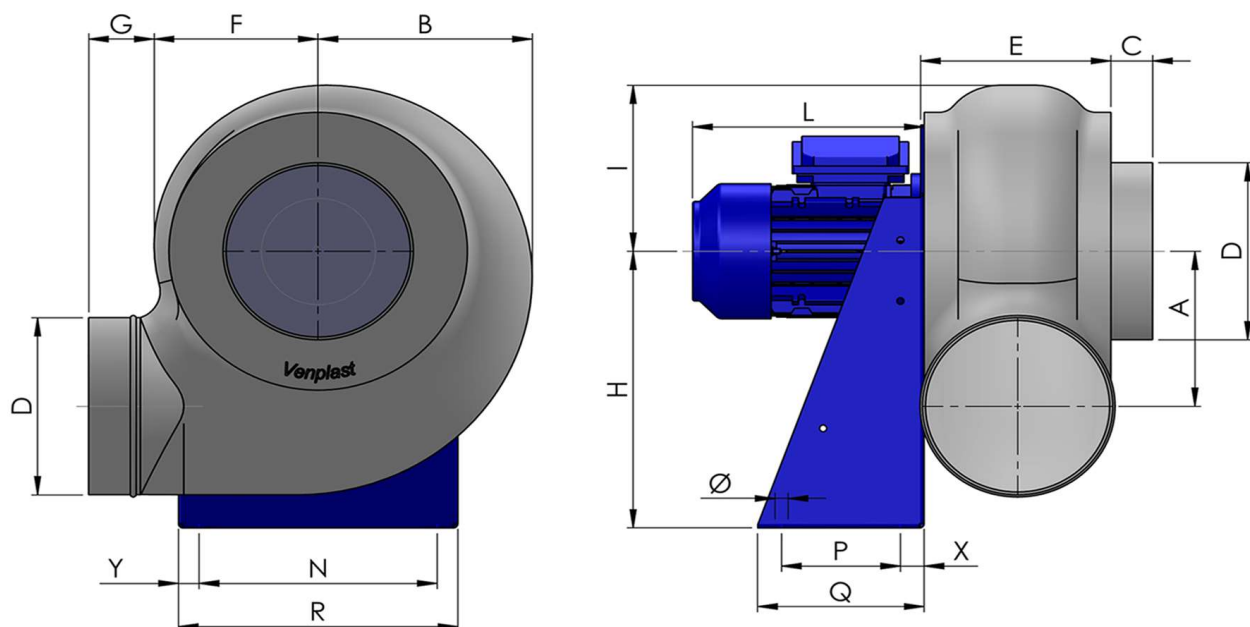

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
140	180	35	160	160	138	55	250	150	195	200	11	100	140
R				X				Y					
235				20				17.5					

Configurations & cad

