


Research Data

Air-flow rate[m ³ /h]	499.4
Pressure[Pa]	108
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P224ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	18
Frequency[Hz]	50
Speed[rpm]	1370
Power[kW]	0.12
IP	55
INS	



PRU224ATEX

Pe-el antistatic housing -PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





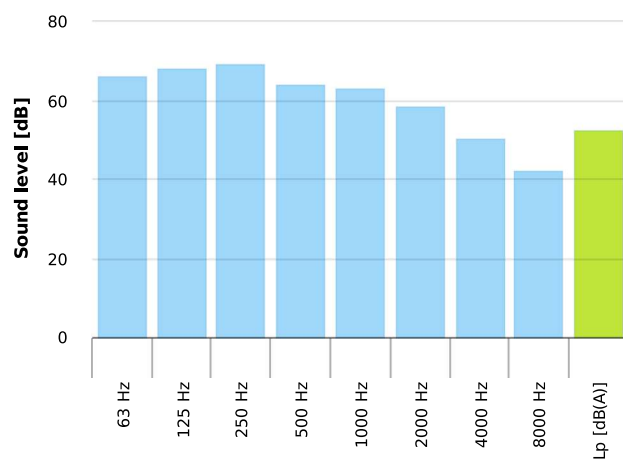


Table engines


Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57

Working point

Q [m³/h]	499.4
P_{sta} [Pa]	108.0
P_{tot} [Pa]	111.0
P_{in} [kW] [W]	18.11
n_{sta}	0.825
n_{tot}	0.848
Rpm	1370

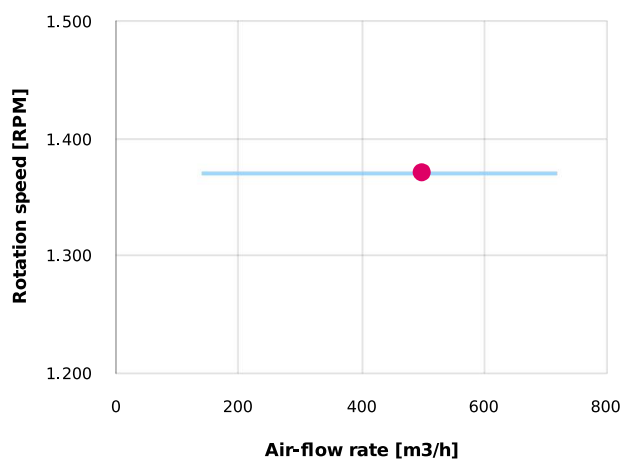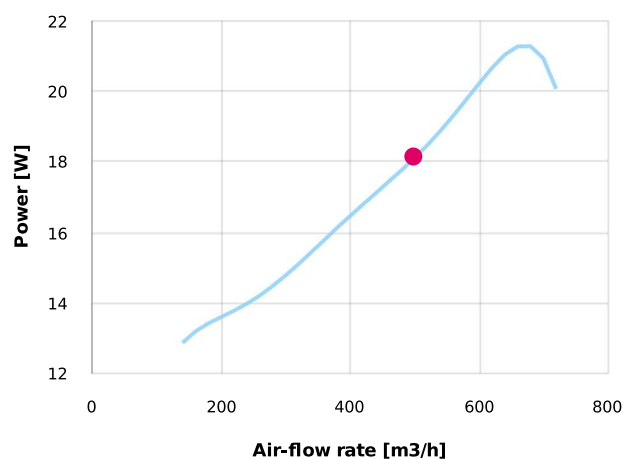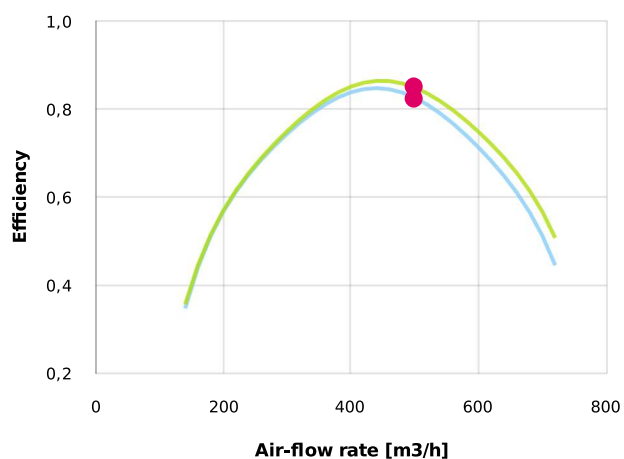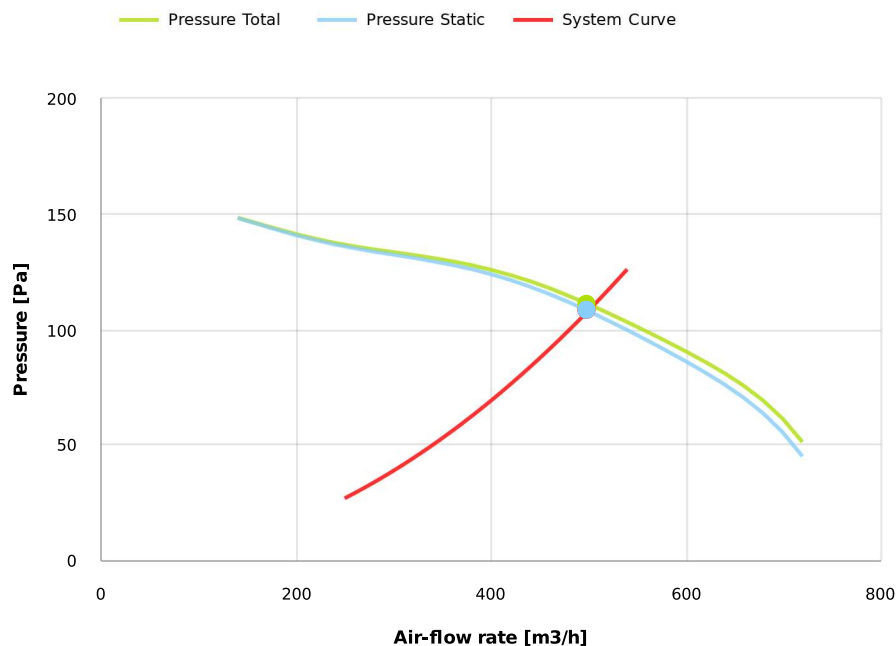

Dimensions

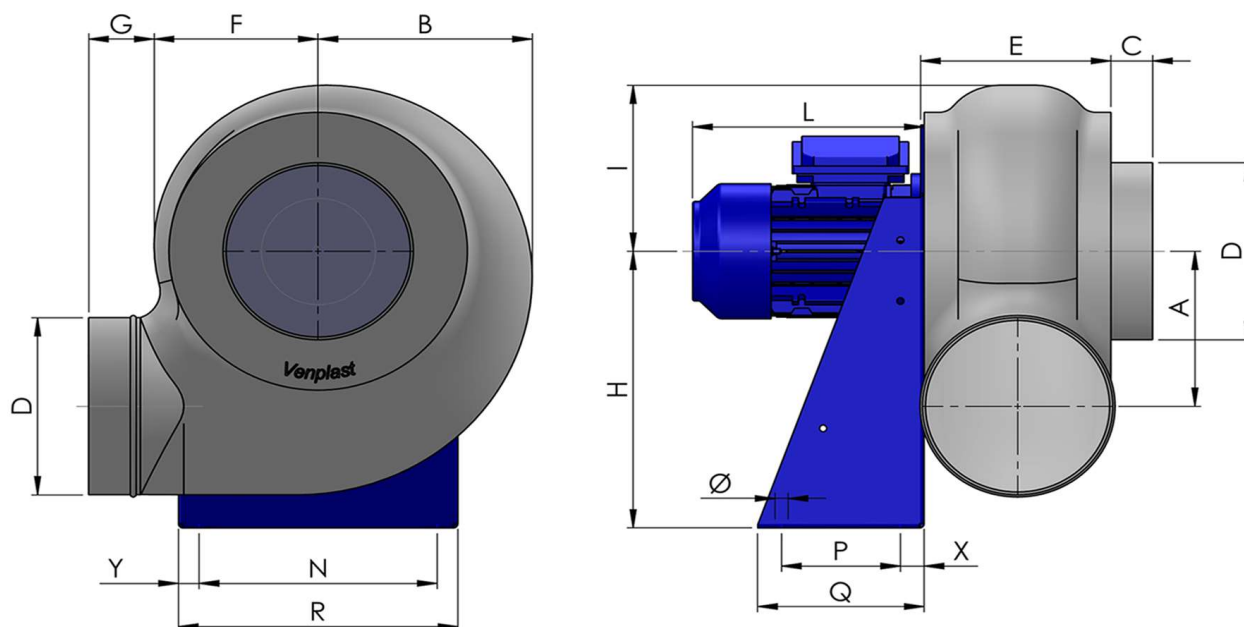

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
173	228	35	200	185	170	55	310	190	190	255	11	100	140
R				X				Y					
290				20				17.5					

Configurations & cad

