


Research Data

Air-flow rate[m ³ /h]	1400
Pressure[Pa]	237.3
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P314ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	30
Frequency[Hz]	50
Speed[rpm]	1400
Power[kW]	0.25
IP	55
INS	



PRU314ATEX

Pe-el antistatic housing -PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





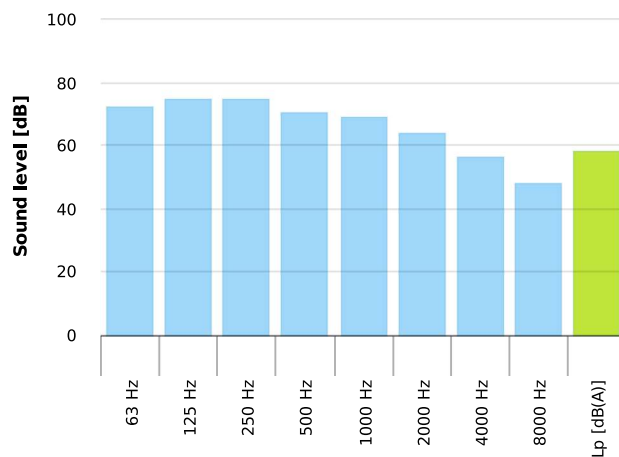


Table engines


Class IE	IE1
Size	71
Power[kW]	0.25
Current[A]	0.84
Voltage[V]	400
Cos φ	0.72
n	0.6

Working point

Q [m³/h]	1400
P_{sta} [Pa]	237.3
P_{tot} [Pa]	246.9
P_{in} [kW] [W]	115.3
n_{sta}	0.802
n_{tot}	0.835
Rpm	1400

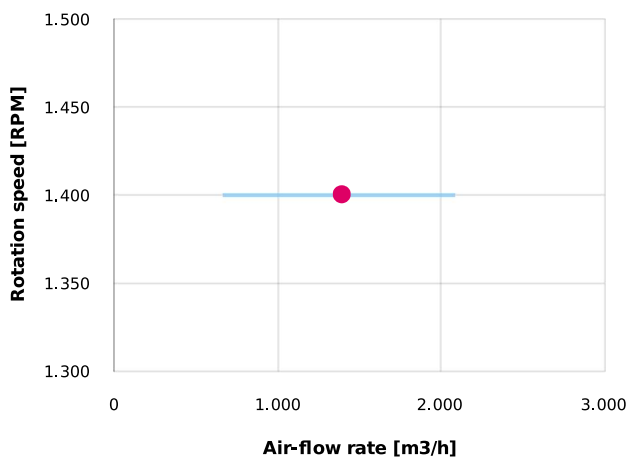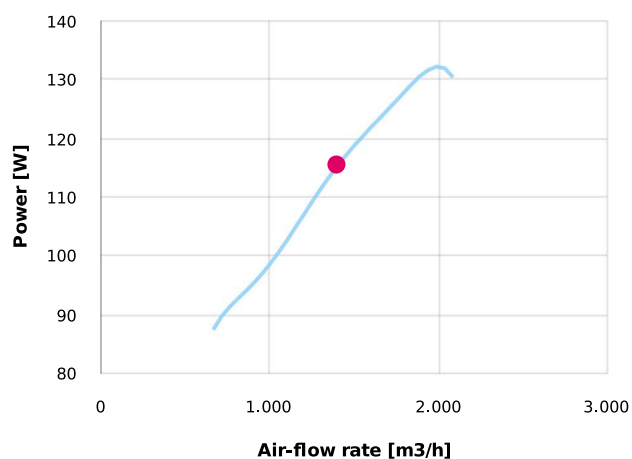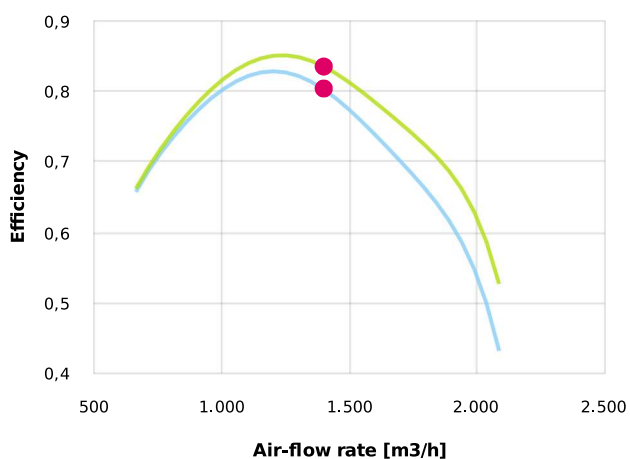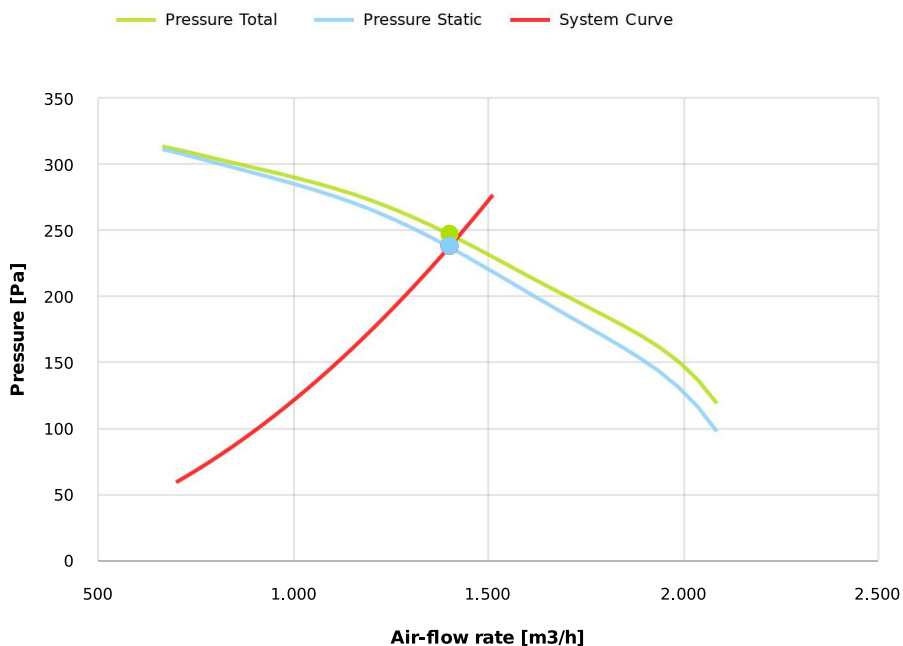

Dimensions

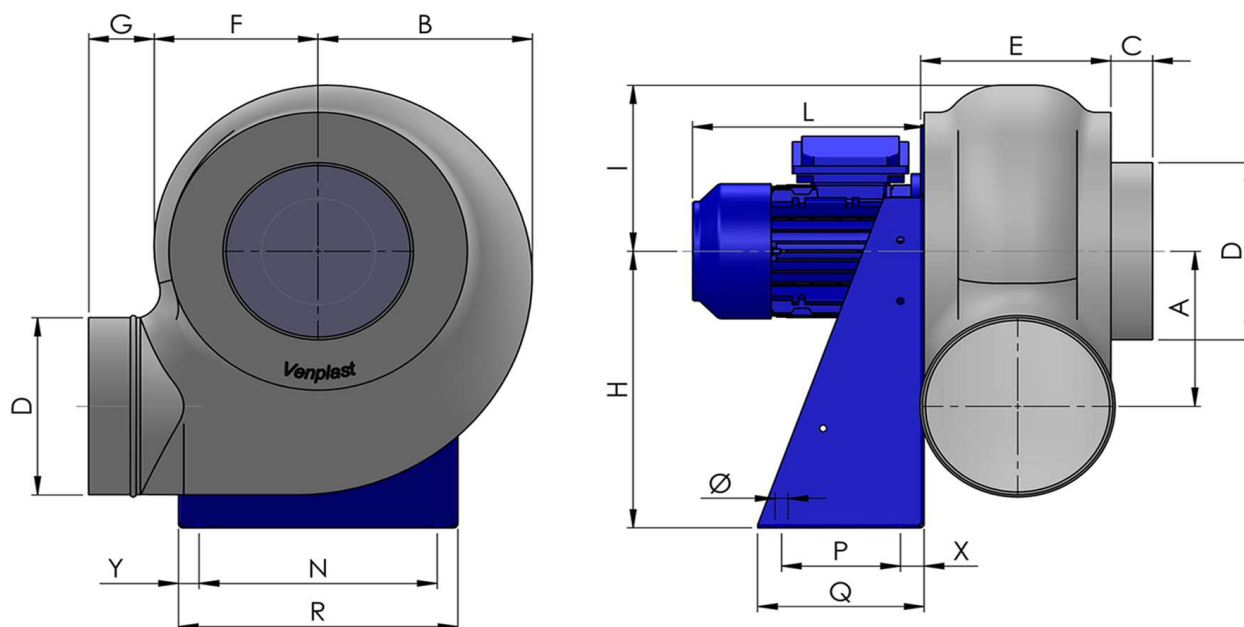

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
240	280	40	250	200	210	70	410	230	220	320	11	150	230
R				X				Y					
355				40				175					

Configurations & cad

