


Research Data

Air-flow rate[m ³ /h]	2220
Pressure[Pa]	280.5
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P354ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	34
Frequency[Hz]	50
Speed[rpm]	1400
Power[kW]	0.37
IP	55
INS	



PRU354ATEX

Pe-el antistatic housing -PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





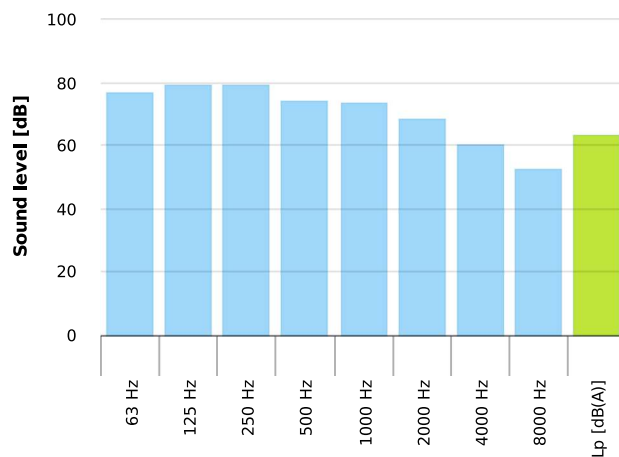


Table engines


Class IE	IE1
Size	71
Power[kW]	0.37
Current[A]	1.11
Voltage[V]	400
Cos φ	0.74
n	0.65

Working point

Q [m³/h]	2220
P_{sta} [Pa]	280.5
P_{tot} [Pa]	295.8
P_{in} [kW] [W]	229.6
n_{sta}	0.755
n_{tot}	0.795
Rpm	1400

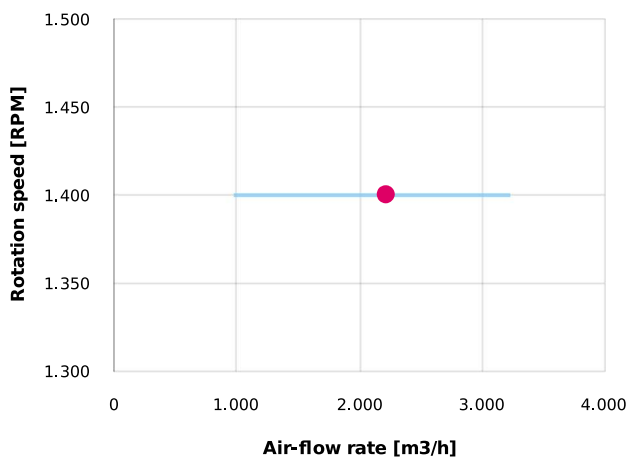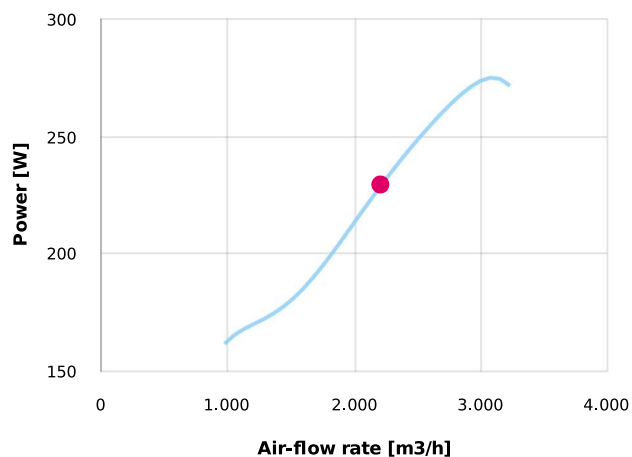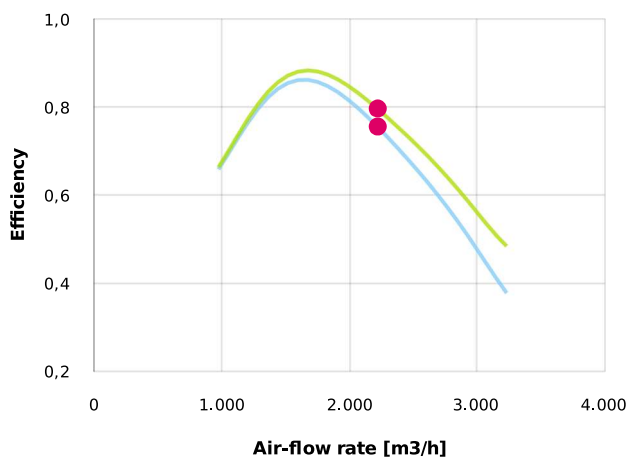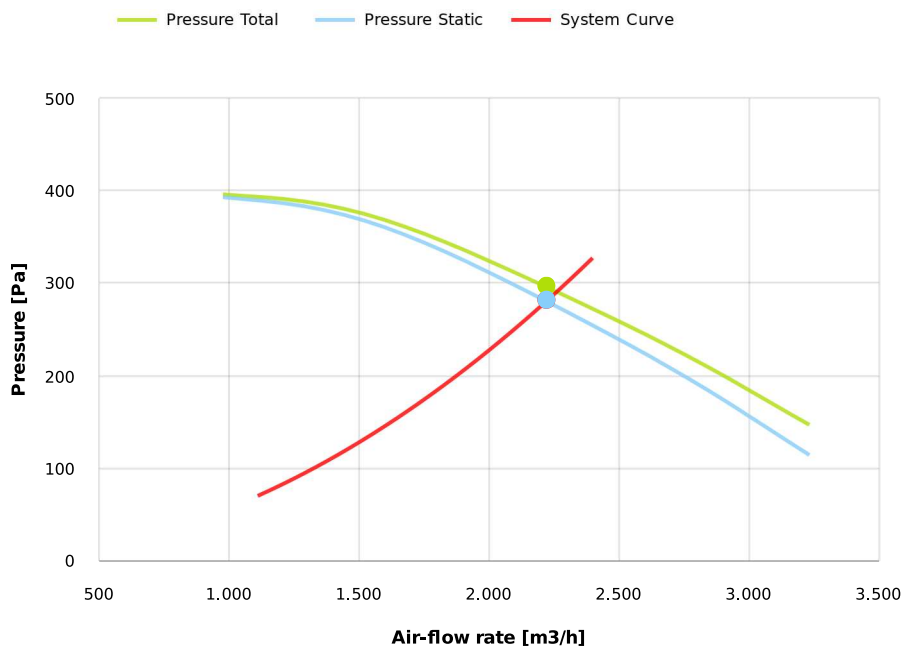

Dimensions

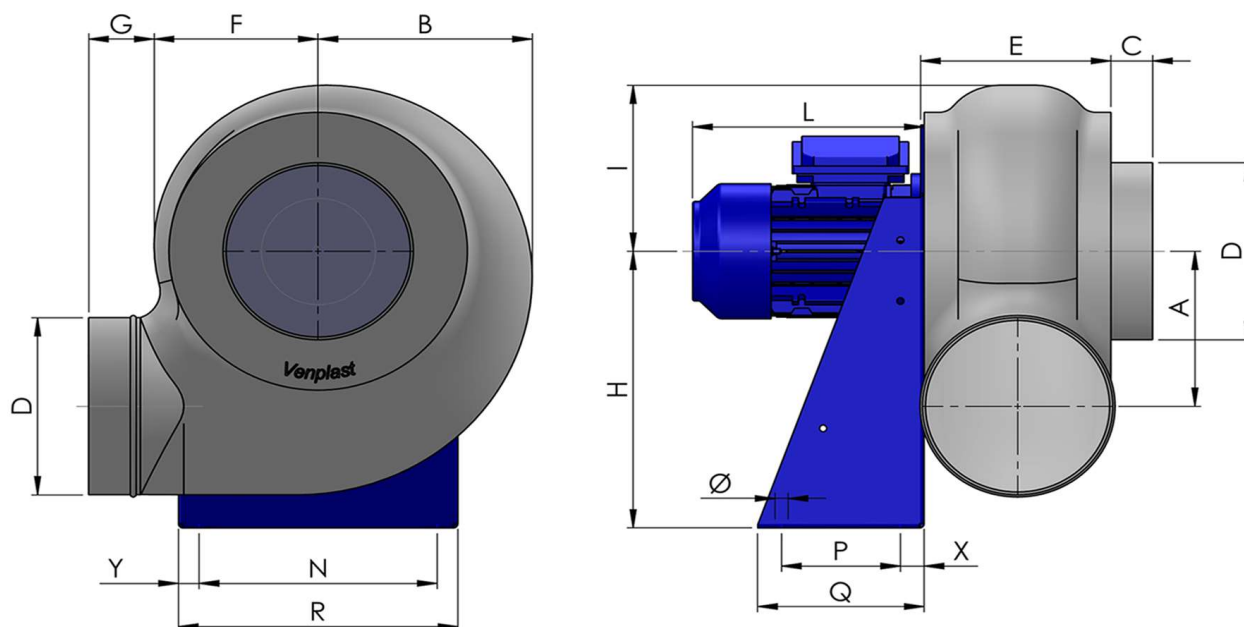

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
260	312	40	280	237	230	55	445	270	220	355	11	150	230
R				X				Y					
390				40				17.5					

Configurations & cad

