


Research Data

Air-flow rate[m ³ /h]	1526
Pressure[Pa]	118.7
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P356ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	34
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.18
IP	55
INS	



PRU356ATEX

Pe-el antistatic housing -PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





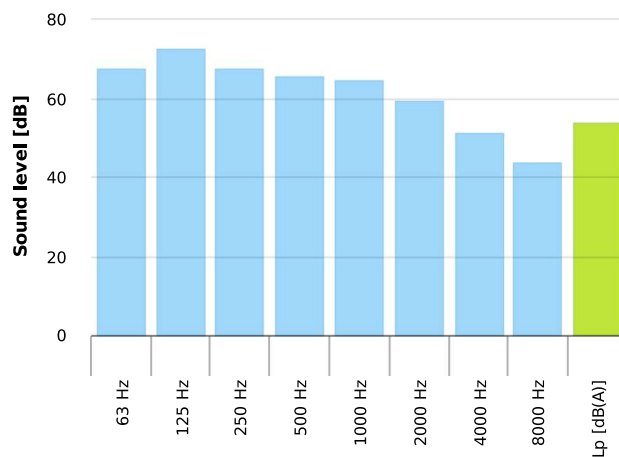


Table engines


Class IE	IE1
Size	71
Power[kW]	0.18
Current[A]	0.7
Voltage[V]	400
Cos φ	0.66
n	0.56

Working point

Q [m³/h]	1526
P_{sta} [Pa]	118.7
P_{tot} [Pa]	126.0
P_{in} [kW] [W]	68.87
n_{sta}	0.731
n_{tot}	0.776
Rpm	930

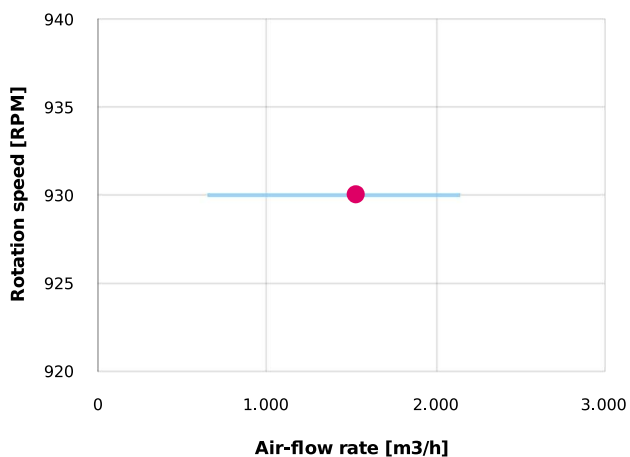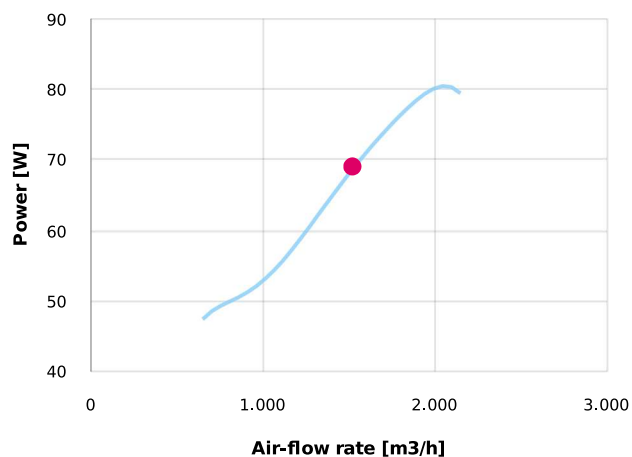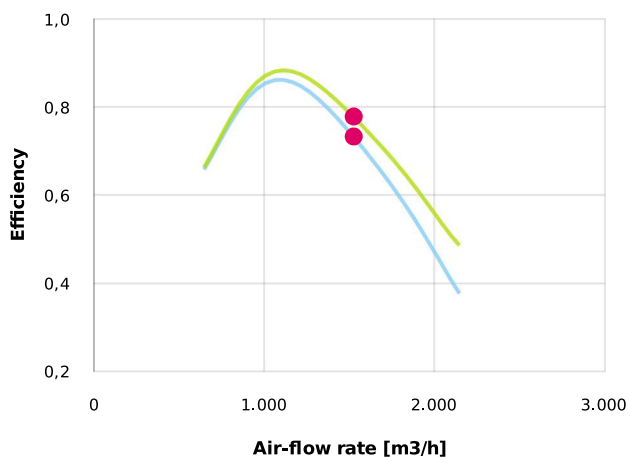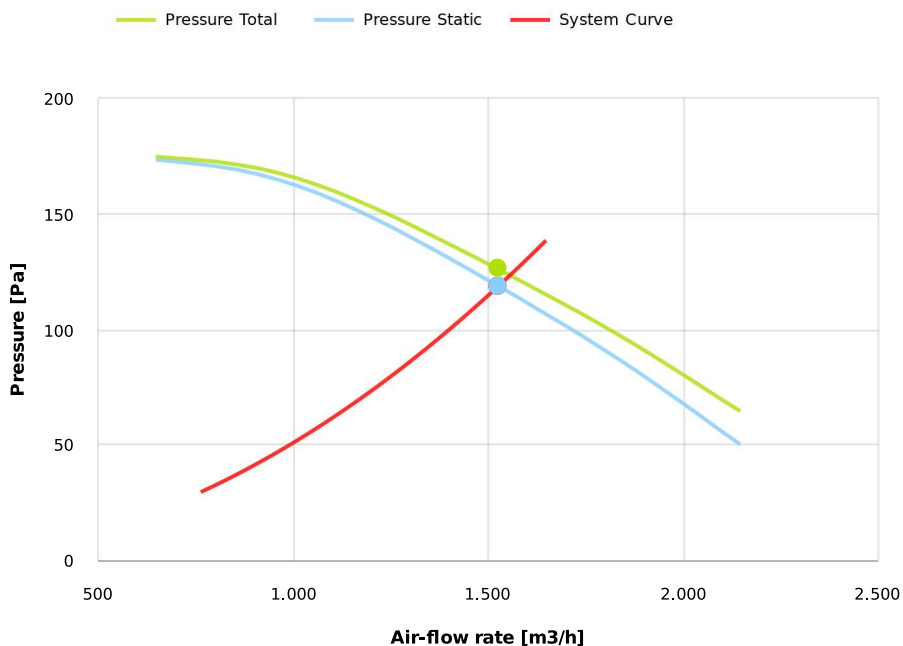


Dimensions

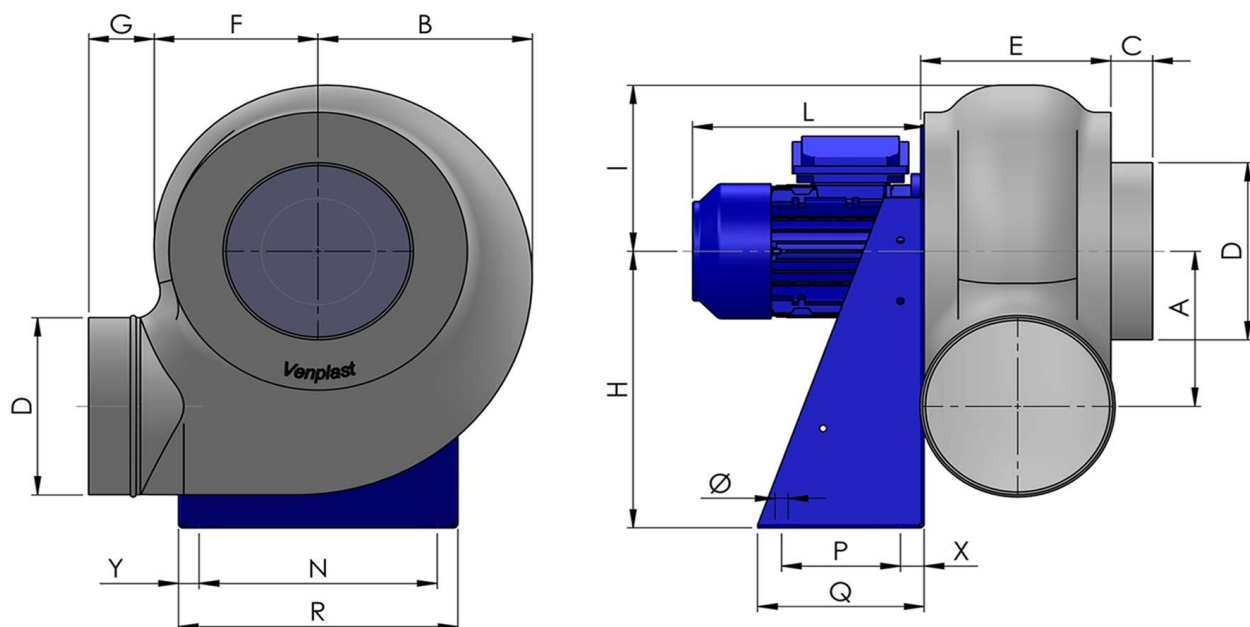


A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
260	312	40	280	237	230	55	445	270	210	355	11	150	230
R				X				Y					
390				40				17.5					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

