


Research Data

Air-flow rate[m ³ /h]	2011
Pressure[Pa]	150
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P406ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	41
Frequency[Hz]	50
Speed[rpm]	920
Power[kW]	0.25
IP	55
INS	



PRU406ATEX

Pe-el antistatic housing -PP impeller - epoxy painted motor support - stainless steel screws

Certificazioni





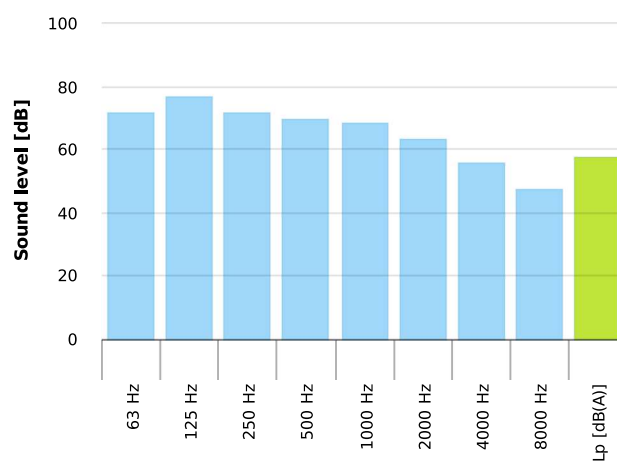


Table engines


Class IE	IE1
Size	71
Power[kW]	0.25
Current[A]	0.87
Voltage[V]	400
Cos φ	0.7
n	0.59

Working point

Q [m³/h]	2011
P_{sta} [Pa]	150.0
P_{tot} [Pa]	157.9
P_{in} [kW] [W]	108.3
n_{sta}	0.775
n_{tot}	0.815
Rpm	920

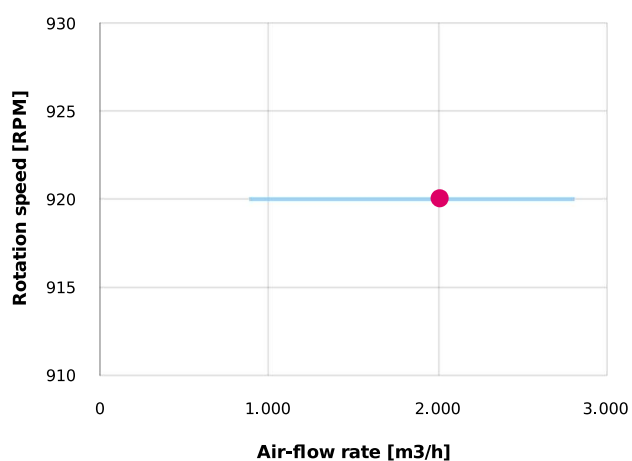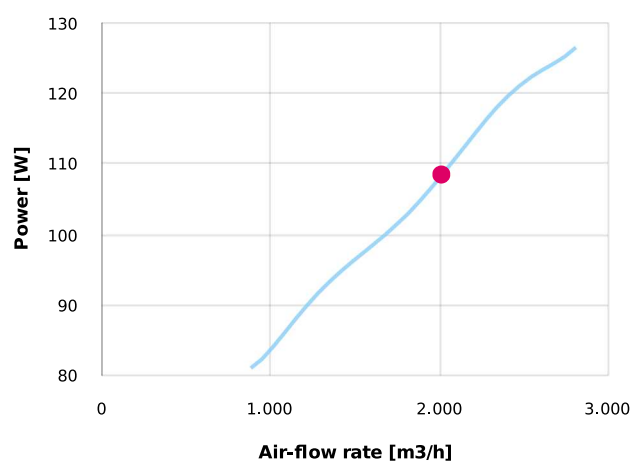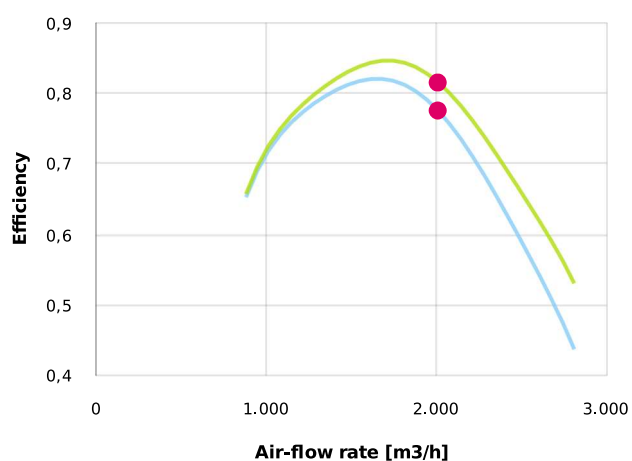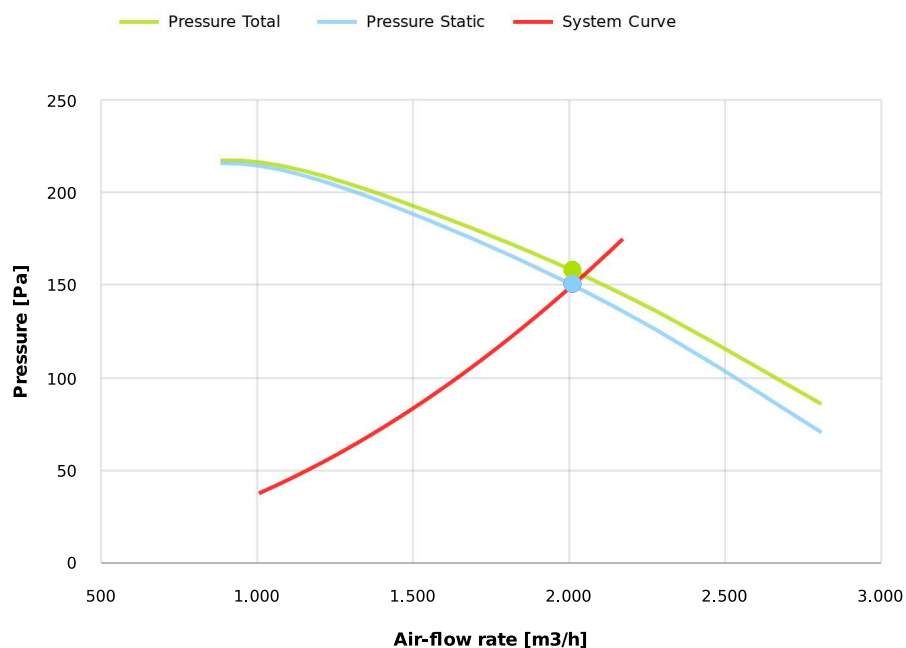

Dimensions

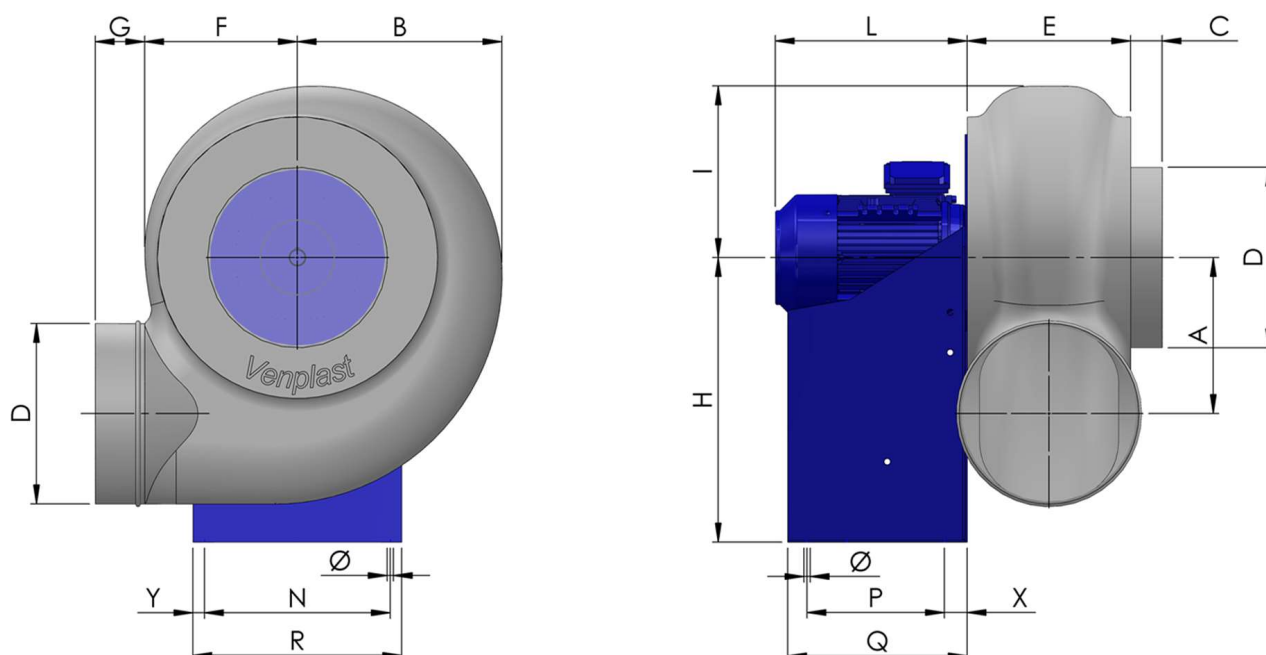

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
290	356	40	315	252	264	55	495	295	220	325	11	170	250
R							X				Y		
365							40				20		

Configurations & cad

