

R2E220-AB08-62

# AC centrifugal fan

backward-curved



**ebm-papst Mulfingen GmbH & Co. KG**  
Bachmühle 2 · D-74673 Mulfingen  
Phone +49 7938 81-0  
Fax +49 7938 81-110  
info1@de.ebmpapst.com  
www.ebmpapst.com

## Nominal data

|                             |                   |         |         |         |
|-----------------------------|-------------------|---------|---------|---------|
| Type                        | R2E220-AB08-62    |         |         |         |
| Motor                       | M2E068-CF         |         |         |         |
| Phase                       |                   | 1~      | 1~      | 1~      |
| Nominal voltage             | VAC               | 115     | 115     | 115     |
| Frequency                   | Hz                | 50      | 60      | 60      |
| Method of obtaining data    |                   | fa      | fa      | fa      |
| Valid for approval/standard |                   | CE      | CE      | UL 2111 |
| Speed                       | min <sup>-1</sup> | 2750    | 3050    | 3050    |
| Power consumption           | W                 | 93      | 125     | 130     |
| Current draw                | A                 | 0.8     | 1.1     | 1.15    |
| Capacitor                   | µF                | 10      | 10      | 10      |
| Capacitor voltage           | VDB               | 220     | 220     | 220     |
| Capacitor standard          |                   | P0 (CE) | P0 (CE) | UL      |
| Min. back pressure          | Pa                | 0       | 0       | 0       |
| Min. ambient temperature    | °C                | -25     | -25     | -25     |
| Max. ambient temperature    | °C                | 30      | 35      | 35      |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



## Technical description

|                                                                            |                                                              |
|----------------------------------------------------------------------------|--------------------------------------------------------------|
| Weight                                                                     | 1.7 kg                                                       |
| Fan size                                                                   | 220 mm                                                       |
| Rotor surface                                                              | Painted black                                                |
| Impeller material                                                          | PA6 plastic, glass-fiber reinforced                          |
| Number of blades                                                           | 11                                                           |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                               |
| Degree of protection                                                       | IP44; installation- and position-dependent as per EN 60034-5 |
| Insulation class                                                           | "B"                                                          |
| Moisture (F) / Environmental (H) protection class                          | F1-2                                                         |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                                      |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                      |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensation drainage holes                                                | On rotor side                                                |
| Mode                                                                       | S1                                                           |
| Motor storage                                                              | Ball bearing                                                 |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA                                                    |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected        |
| With cable                                                                 | Variable                                                     |
| Protection class                                                           | I (with customer connection of protective earth)             |
| Conformity with standards                                                  | EN 60335-1; CE                                               |
| Approval                                                                   | CCC; CSA C22.2 No. 77; UL 2111                               |

## AC centrifugal fan

### backward-curved

Technical drawing of a mechanical component, likely a lamp head, showing front and side views with dimensions.

**Front View Dimensions:**


- Overall width:  $69 \pm 1$
- Top flange width:  $64.1$
- Flange thickness:  $44$
- Mounting bracket width:  $2$
- Mounting bracket hole diameter:  $\varnothing 27 \pm 0.1$
- Mounting bracket hole offset:  $50 \pm 10$
- Mounting bracket length:  $250 \pm 20$
- Mounting bracket hole diameter:  $\varnothing 27 \pm 0.1$
- Mounting bracket hole offset:  $50 \pm 10$
- Mounting bracket length:  $250 \pm 20$
- Mounting bracket hole diameter:  $\varnothing 27 \pm 0.1$
- Mounting bracket hole offset:  $50 \pm 10$
- Mounting bracket length:  $250 \pm 20$

**Side View Dimensions:**

- Overall height:  $221.4$
- Top flange height:  $160.7$
- Flange thickness:  $44$
- Mounting bracket width:  $2$
- Mounting bracket hole diameter:  $\varnothing 27 \pm 0.1$
- Mounting bracket hole offset:  $50 \pm 10$
- Mounting bracket length:  $250 \pm 20$
- Mounting bracket hole diameter:  $\varnothing 27 \pm 0.1$
- Mounting bracket hole offset:  $50 \pm 10$
- Mounting bracket length:  $250 \pm 20$


**Detail View Dimensions:**

- Detail view shows a cross-section of the mounting bracket with a radius of  $R21$ .
- Detail view shows a cross-section of the mounting bracket with a radius of  $R21$ .

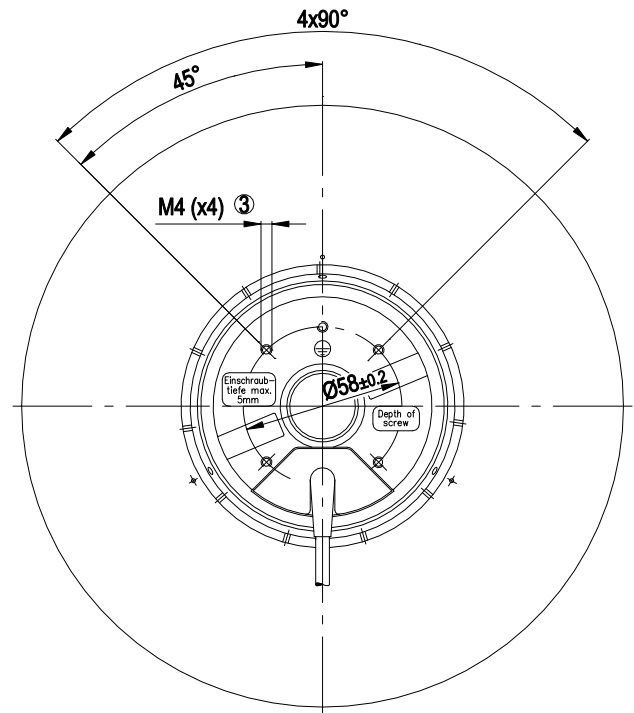

|     |                                                                            |
|-----|----------------------------------------------------------------------------|
| 1   | Cable PFA AWG18, 1x AMP socket plug 3-644460-5                             |
| 1.1 | blue                                                                       |
| 1.2 | black                                                                      |
| 1.3 | brown                                                                      |
| 2   | Accessory part: inlet ring 09609-2-4013, not included in scope of delivery |
| 3   | Max. clearance for screw 5 mm                                              |


Connection diagram



|    |      |   |       |    |       |
|----|------|---|-------|----|-------|
| U1 | blue | Z | brown | U2 | black |
|----|------|---|-------|----|-------|



## Curves: Air performance 50 Hz

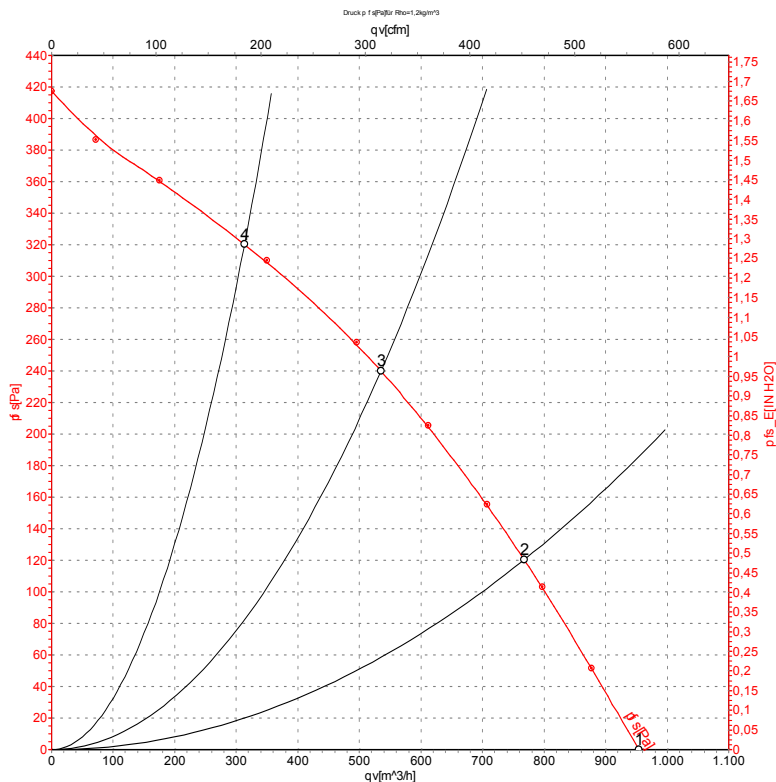

Measurement: LU-32990


Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | qv   | P <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-------------------|------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | m³/h | Pa              |
| 1 | 115 | 50 | 2750              | 93             | 0.80 | 65                | 74                | 955  | 0               |
| 2 | 115 | 50 | 2645              | 105            | 0.92 | 62                | 71                | 770  | 120             |
| 3 | 115 | 50 | 2560              | 115            | 1.01 | 58                | 67                | 535  | 240             |
| 4 | 115 | 50 | 2595              | 107            | 0.94 | 62                | 71                | 315  | 320             |

U = Power supply · f = Frequency · n = Speed · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 qv = Air flow · P<sub>fs</sub> = Pressure increase

## Curves: Air performance 60 Hz

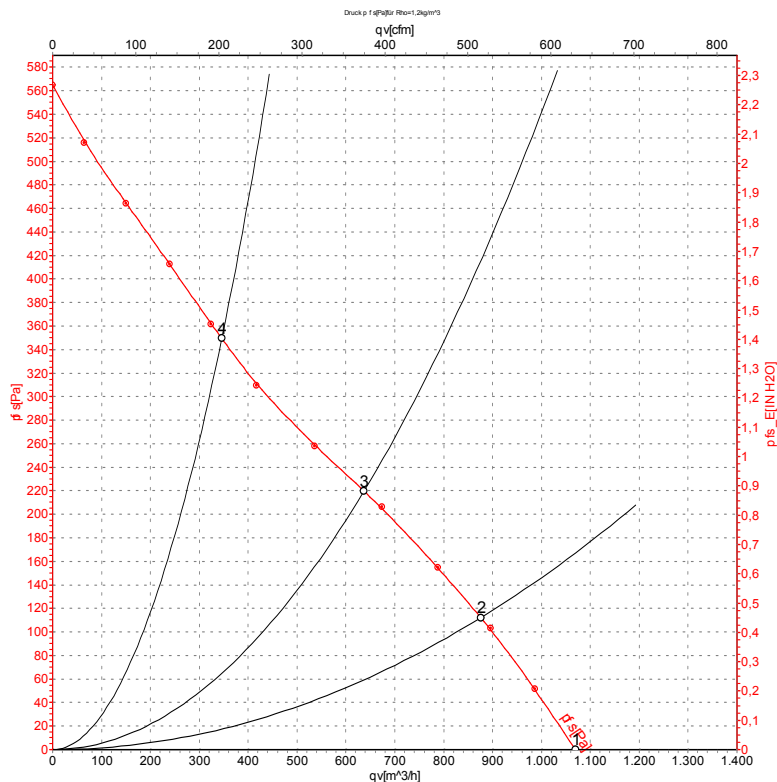

Measurement: LU-32991

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | qv   | P <sub>ts</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-------------------|------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | m³/h | Pa              |
| 1 | 115 | 60 | 3050              | 125            | 1.10 | 67                | 76                | 1070 | 0               |
| 2 | 115 | 60 | 2900              | 139            | 1.21 | 63                | 72                | 875  | 110             |
| 3 | 115 | 60 | 2675              | 153            | 1.34 | 58                | 67                | 635  | 220             |
| 4 | 115 | 60 | 2750              | 148            | 1.29 | 62                | 71                | 345  | 350             |

U = Power supply · f = Frequency · n = Speed · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 qv = Air flow · P<sub>ts</sub> = Pressure increase