

R4D450-AD12-06

# AC centrifugal fan

backward curved, single inlet

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2

D-74673 Mulfingen

Phone: +49(0)7938/81-0

Fax: +49(0)7938/81-110

info1@de.ebmpapst.com

www.ebmpapst.com



## Nominal data

|                               |                   |      |
|-------------------------------|-------------------|------|
| Type                          | R4D450-AD12-06    |      |
| Motor                         | M4D094-HA         |      |
| Phase                         |                   | 3~   |
| Nominal voltage               | VAC               | 400  |
| Connection                    |                   | Y    |
| Frequency                     | Hz                | 50   |
| Type of data definition       |                   | ml   |
| Valid for approval / standard |                   | CE   |
| Speed                         | min <sup>-1</sup> | 1380 |
| Power input                   | W                 | 650  |
| Current draw                  | A                 | 1.45 |
| Min. back pressure            | Pa                | 0    |
| Min. ambient temperature      | °C                | -40  |
| Max. ambient temperature      | °C                | 45   |
| Starting current              | A                 | 5.4  |

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations

## Data according to ErP directive

|                       |        |
|-----------------------|--------|
| Installation category | A      |
| Efficiency category   | Static |
| Variable speed drive  | No     |
| Specific ratio*       | 1.00   |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

|                                |                   | Actual | Request 2013 | Request 2015 |
|--------------------------------|-------------------|--------|--------------|--------------|
| Overall efficiency $\eta_{es}$ |                   | 46.5   | 45.5         | 49.5         |
| Efficiency grade N             |                   | 59     | 58           | 62           |
| Power input $P_e$              | kW                | 0.64   |              |              |
| Air flow $q_v$                 | m <sup>3</sup> /h | 3065   |              |              |
| Pressure increase $p_{fs}$     | Pa                | 351    |              |              |
| Speed n                        | min <sup>-1</sup> | 1380   |              |              |

Data established at point of optimum efficiency




## Technical features

|                                                                    |                                                  |
|--------------------------------------------------------------------|--------------------------------------------------|
| Mass                                                               | 9.4 kg                                           |
| Size                                                               | 450 mm                                           |
| Surface of rotor                                                   | Coated in black                                  |
| Material of impeller                                               | Aluminium sheet                                  |
| Number of blades                                                   | 6                                                |
| Direction of rotation                                              | Clockwise, seen on rotor                         |
| Type of protection                                                 | IP 54                                            |
| Insulation class                                                   | "F"                                              |
| Humidity class                                                     | F4-1                                             |
| Max. permissible ambient motor temp. (transp./ storage)            | +80 °C                                           |
| Min. permissible ambient motor temp. (transp./storage)             | -40 °C                                           |
| Mounting position                                                  | Any                                              |
| Condensate discharge holes                                         | None                                             |
| Operation mode                                                     | S1                                               |
| Motor bearing                                                      | Ball bearing                                     |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                        |
| Motor protection                                                   | Thermal overload protector (TOP) brought out     |
| Cable exit                                                         | Variable                                         |
| Protection class                                                   | I (if protective earth is connected by customer) |
| Product conforming to standard                                     | EN 60034-1 (2004); CE                            |
| Approval                                                           | CCC                                              |

## AC centrifugal fan

backward curved, single inlet

## Product drawing

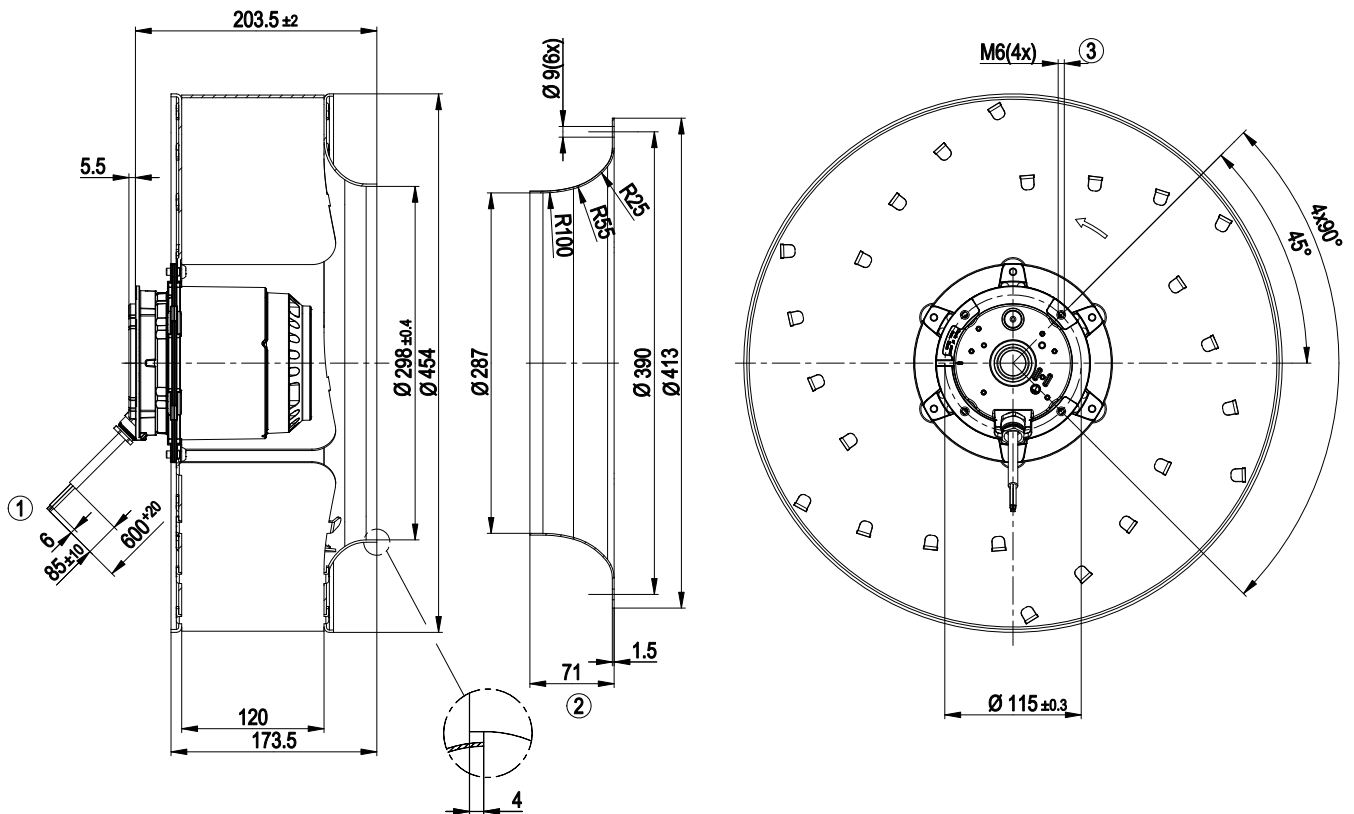


- |   |                                                                                            |
|---|--------------------------------------------------------------------------------------------|
| 1 | Connection line silicone, 6x brass lead tips crimped                                       |
| 2 | Accessory part: Inlet nozzle 54478-2-4013, not included in the standard scope of delivery. |
| 3 | Depth of screw max. 12 mm                                                                  |

# AC centrifugal fan

backward curved, single inlet

Connection screen

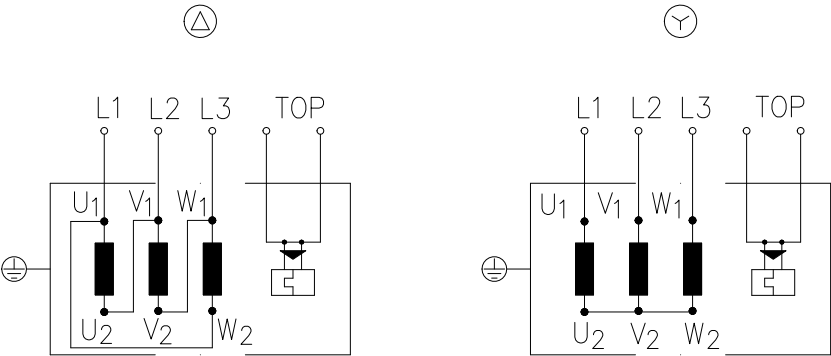

Changing the direction of rotation by reversing the two phases


|    |                  |    |                 |     |              |
|----|------------------|----|-----------------|-----|--------------|
| Δ  | Delta connection | Y  | Star connection | L1  | = U1 = black |
| L2 | = V1 = blue      | L3 | = W1 = brown    | W2  | yellow       |
| U2 | green            | V2 | white           | TOP | 2 x grey     |
| PE | green / yellow   |    |                 |     |              |



# AC centrifugal fan

backward curved, single inlet

## Charts: Air flow 50 Hz

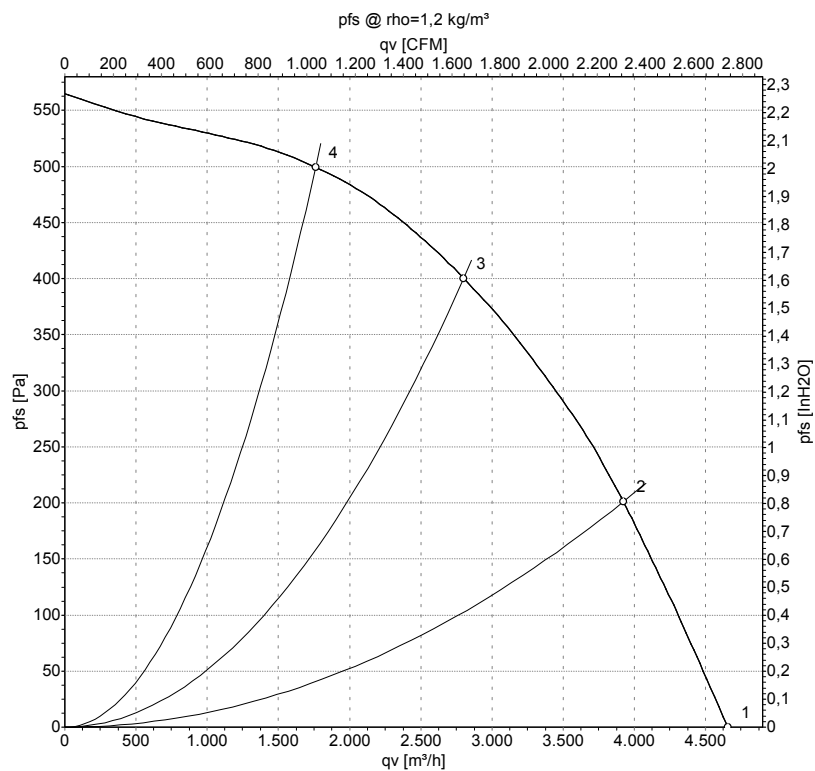

Measurement: LU-107301

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | qv   | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h | Pa              |
| 1 | 400 | 50 | 1435              | 416            | 1.32 | 4655 | 0               |
| 2 | 400 | 50 | 1395              | 580            | 1.41 | 3920 | 200             |
| 3 | 400 | 50 | 1380              | 650            | 1.45 | 2800 | 400             |
| 4 | 400 | 50 | 1395              | 588            | 1.42 | 1760 | 500             |

U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase