

S3G450-KC28-51

EC axial fan - HyBlade

sickle-shaped blades (S series)

with guard grille for full nozzle

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	S3G450-KC28-51	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1300
Power consumption	W	345
Current draw	A	2.2
Max. back pressure	Pa	125
Max. back pressure	in. wg	0.5
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	34	30.8	09 Power consumption P_{ed}	kW	0.35
02 Measurement category		A		09 Air flow q_v	m³/h	3505
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	112
04 Efficiency grade N		43.2	40	10 Speed (rpm) n	min ⁻¹	1310
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

LU-197772



Technical description


Weight	6.7 kg
Size	450 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Guard grille material	Steel, phosphated and coated with black plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H2
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Control input 0-10 VDC / PWM - Output 10 VDC, max. 1.1 mA - Thermal overload protection for electronics/motor - Alarm relay - Line undervoltage detection - Motor current limitation - Soft start
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-3 + 60730-1



EC axial fan - HyBlade

sickle-shaped blades (S series)
with guard grille for full nozzle

Product drawing

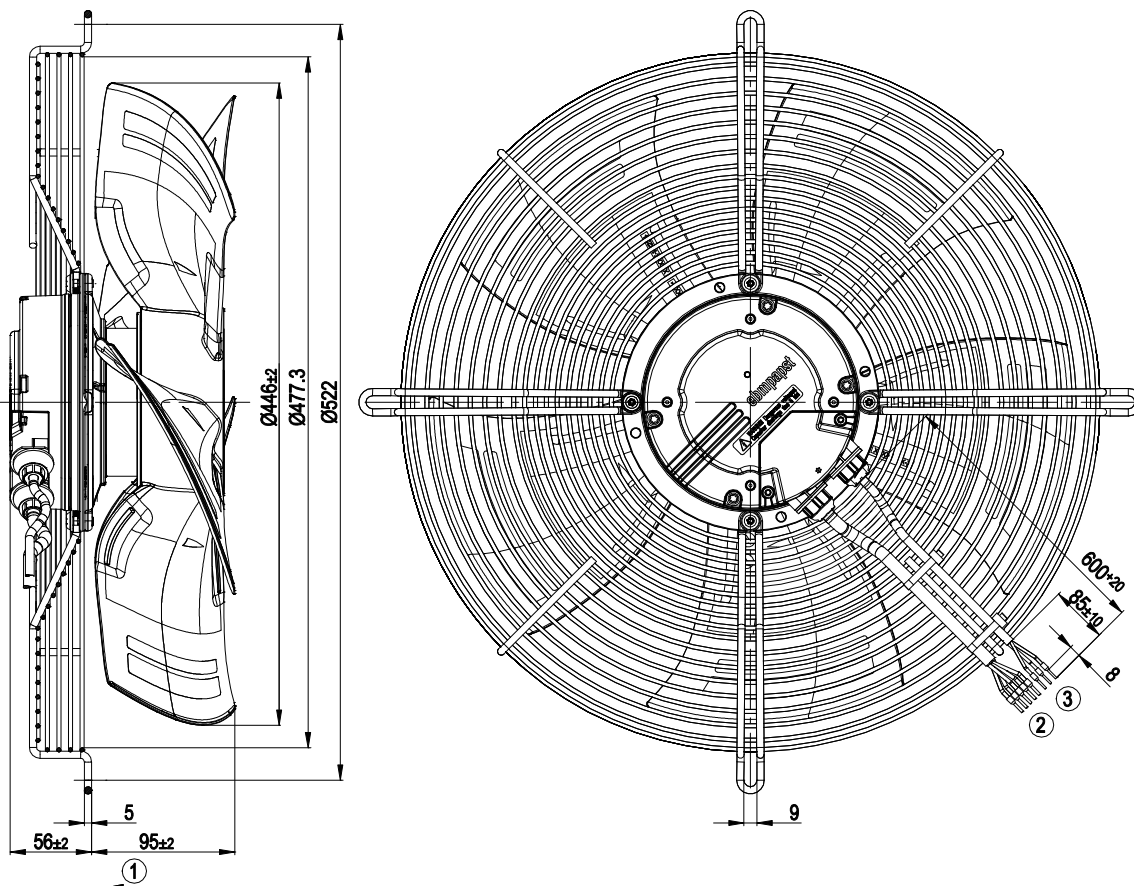

- | | |
|---|-----------------------------------|
| 1 | Direction of air flow "V" |
| 2 | Cable AWG 18, 5x crimped ferrules |
| 3 | Cable AWG 22, 3x crimped ferrules |




EC axial fan - HyBlade

sickle-shaped blades (S series)
with guard grille for full nozzle

Connection diagram


Customer circuit

Application notes for various control options

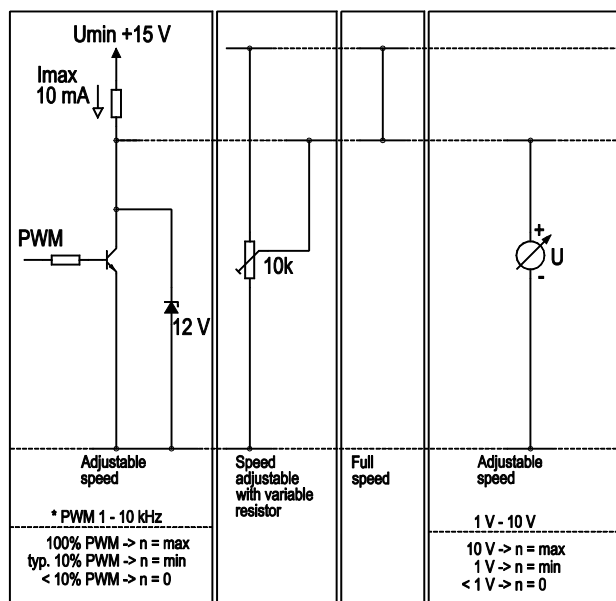


Connection

Fan / Motor

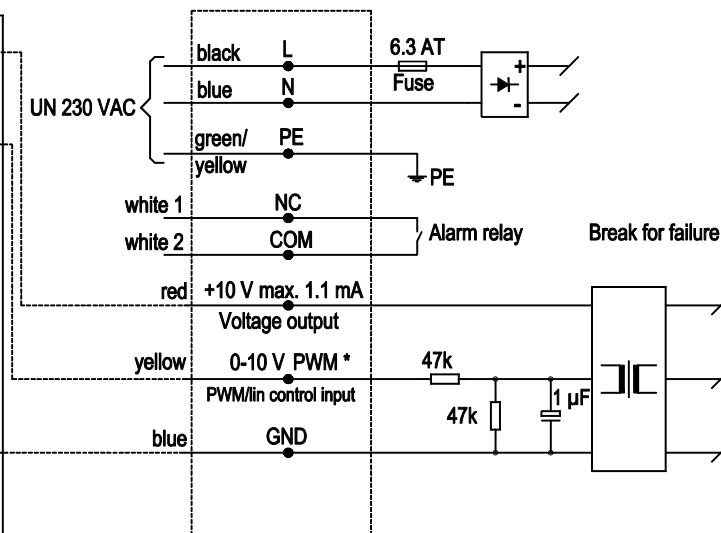

Curves: Air performance 50 Hz

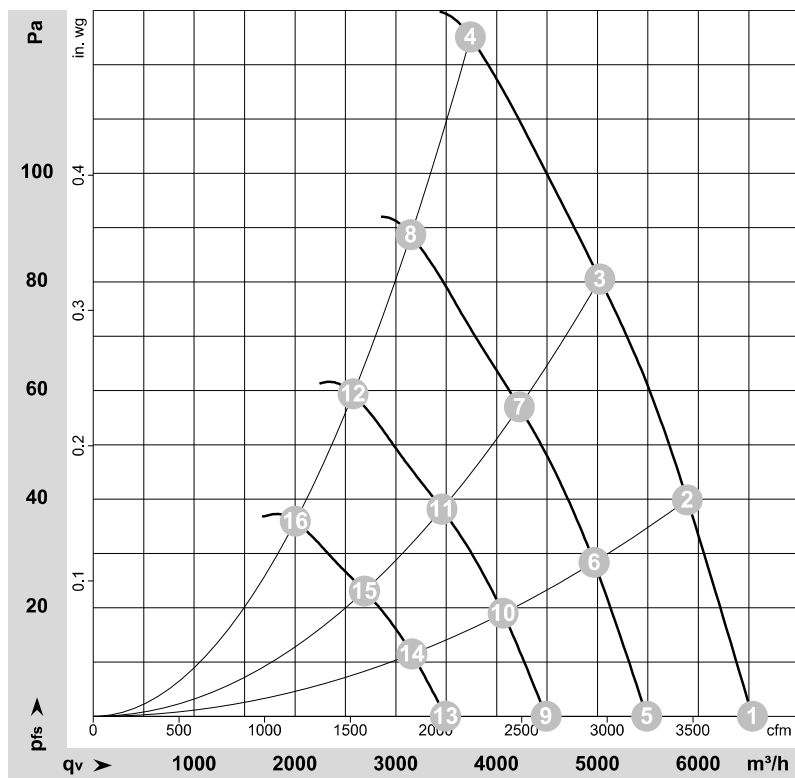

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-124620-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	1~	230	50	1300	270	1.72	65	71	72	6535	0	3845	0.00
2	1~	230	50	1300	300	1.92	62	68	69	5890	40	3465	0.16
3	1~	230	50	1300	328	2.08	59	65	67	5025	80	2955	0.32
4	1~	230	50	1300	345	2.20	62	69	69	3740	125	2200	0.50
5	1~	230	50	1100	160	1.02	60	67	67	5490	0	3230	0.00
6	1~	230	50	1100	180	1.15	58	64	65	4965	29	2925	0.12
7	1~	230	50	1100	196	1.24	55	61	62	4225	57	2485	0.23
8	1~	230	50	1100	207	1.32	57	64	65	3150	89	1855	0.36
9	1~	230	50	900	87	0.56	55	61	62	4490	0	2645	0.00
10	1~	230	50	900	99	0.63	53	59	60	4065	19	2390	0.08
11	1~	230	50	900	107	0.68	50	56	57	3455	38	2035	0.15
12	1~	230	50	900	114	0.72	52	59	60	2575	59	1515	0.24
13	1~	230	50	700	41	0.26	49	55	56	3495	0	2055	0.00
14	1~	230	50	700	46	0.30	46	52	53	3160	12	1860	0.05
15	1~	230	50	700	50	0.32	44	49	51	2690	23	1585	0.09
16	1~	230	50	700	53	0.34	46	53	53	2005	36	1180	0.14

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

