

W4D450-GA14-02

AC axial fan

sickled blades (S series)
with full round nozzle



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2

74673 Mulfingen

Phone: +49 7938 81-0

Fax: +49 7938 81-110

www.ebmpapst.com

info1@de.ebmpapst.com

Nominal data

Type	W4D450-GA14-02				
Motor	M4D094-HA				
Phase		3~	3~	3~	3~
Nominal voltage	[V]	400	400	400	400
Connection		D	Y	D	Y
Frequency	[Hz]	50	50	60	60
Type of data definition		ml	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE
Speed	[min ⁻¹]	1330	1000	1540	1060
Power input	[W]	585	390	660	400
Current draw	[A]	1.1	0.67	1.16	0.7
Max. back pressure	[Pa]	200	110	110	55
Max. ambient temperature	[°C]	70	70	50	50

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

AC axial fan

sickled blades (S series)

with full round nozzle

Technical features

Leackage current	<= 3,5 mA
Size	450 mm
Operation mode	Continuous operation (S1)
Direction of rotation	Clockwise, seen on rotor
Electrical leads	Via terminal box
Humidity class	F3-1
Direction of air flow	"A"
Insulation class	"F"
Bearing motor	Ball bearing
Mass	7.9 kg
Material of electronics housing	Rotor: Coated in black
Material of impeller	Sheet steel, coated in black
Motor protection	Thermal overload protector (TOP) brought out
Product conforming to standard	CE
Number of blades	5
Type of protection	IP 54
Protection class	I


W4D450-GA14-02

AC axial fan

sickled blades (S series)

with full round nozzle

Product drawing

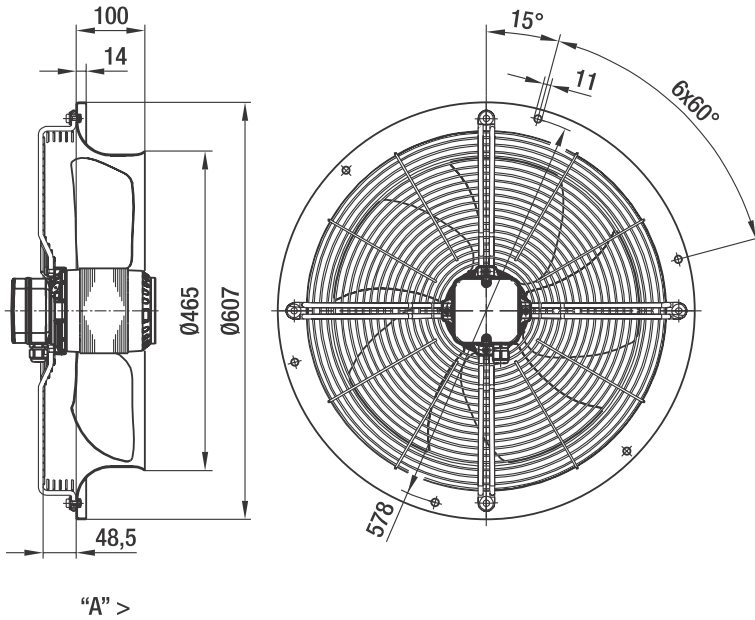


AC axial fan

sickled blades (S series)


with full round nozzle

Connection screen


Delta

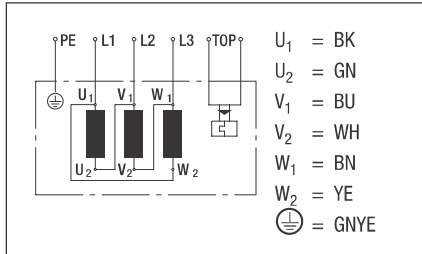

Star

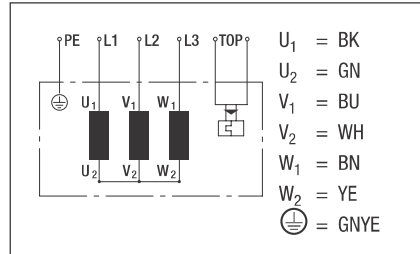

Charts: Air flow 50 Hz

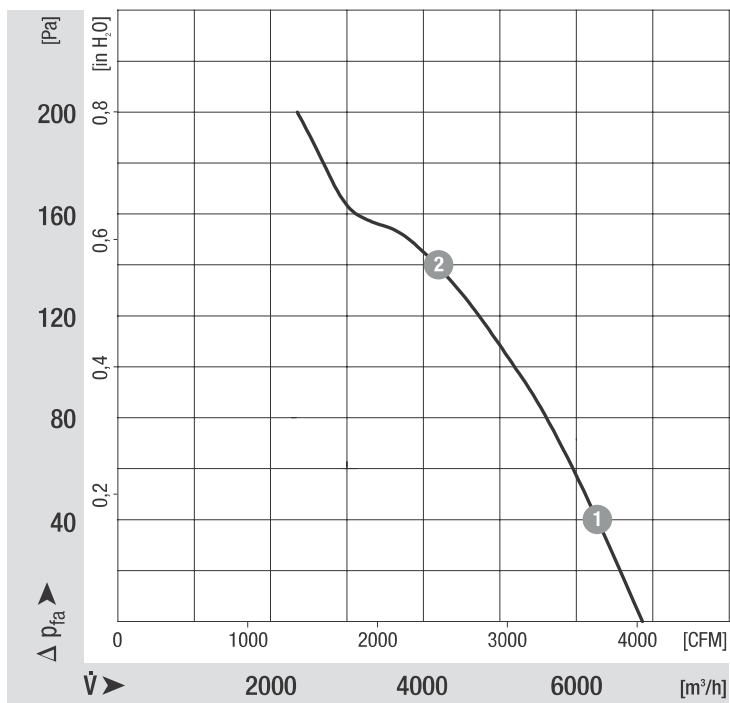

Measured values

	n	P ₁	I
	[min ⁻¹]	[W]	[A]
1	1400	392	0.89
2	1370	476	0.98

AC axial fan

sickled blades (S series)

with full round nozzle

Charts: Air flow 60 Hz

