

KARTA KATALOGOWA

3212 JN

Wentylator osiowy kompaktowy DC

Producent: ebm-papst



Dane znamionowe


Napięcie znamionowe	12 V DC (7...13,8 V DC)
Prędkość obrotowa	6000 obr/min
Pobór mocy	7,5 W
Wydajność	130 m³/h
Poziom ciśnienia akustycznego	51 dB(A)
Poziom mocy akustycznej	6,1 B
Temperatura otoczenia	-20...+70 °C

Budowa

Wymiary	92 × 92 × 38 mm
Materiał wirnika	tworzywo PA wzmocnione włóknem szklanym
Obudowa	tworzywo PBT wzmocnione włóknem szklanym
Kierunek obrotów	w prawo, patrząc na wirnik
Kierunek przepływu	wydmuch przez żebra
Zabezpieczenie silnika	ochrona przed odwrotną polaryzacją i zablokowaniem wirnika
Łożyskowanie	kulkowe
Podłączenie	przewody AWG 24, odizolowane i ocynowane
Trwałość L10 (40 °C)	70000 h
Masa	0,240 kg

Charakterystyka przepływowa

Charts: Air flow

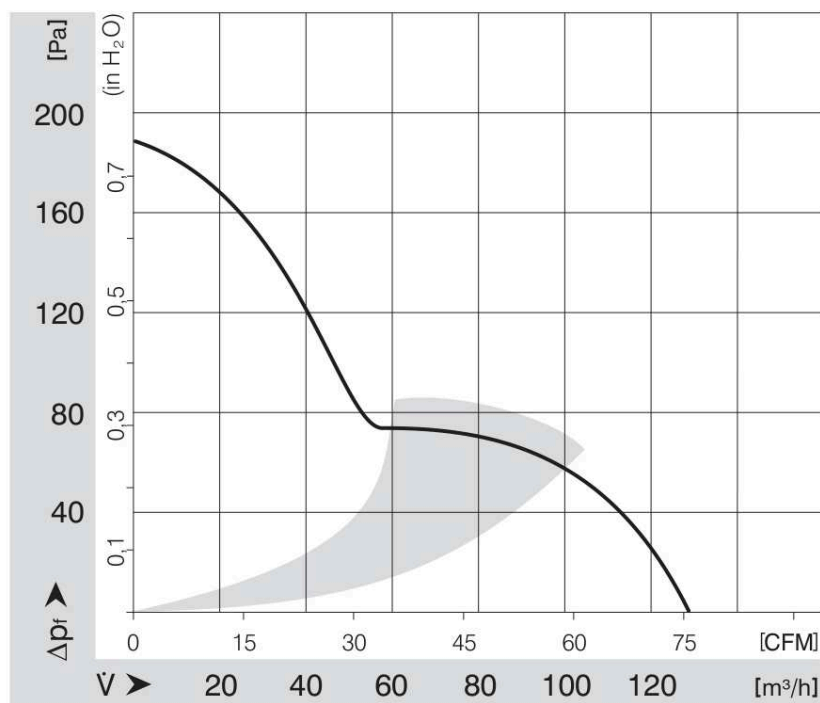

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

3212 JN

DC axial compact fan


ebm-papst St. Georgen GmbH & Co. KG

Hermann-Papst-Straße 1

D-78112 St. Georgen

Phone +49 7724 81-0

Fax +49 7724 81-1309

info2@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	3212 JN	
Nominal voltage	VDC	12
Nominal voltage range	VDC	7 .. 13.8
Speed	min ⁻¹	6000
Power input	W	7.5
Min. ambient temperature	°C	-20
Max. ambient temperature	°C	70
Air flow	m ³ /h	130
Sound power level	B	6.1
Sound pressure level	dB(A)	51

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



3212 JN

DC axial compact fan

Technical features


Dimensions	92 x 92 x 38 mm
General description	Particular design features: Rigid compression curve for high air flow at high counterpressure. Innovative impeller with winglets for low noise. Optional Vario-Pro: Highly flexible software configuration for the fan ensures an easily customisable solution to meet the individual requirements of your application. General features: Material: fibreglass-reinforced plastic. Impeller PA, housing PBT. Electronic commutation completely integrated. Protected against reverse polarity and locking. Connection via single strands AWG 24 (H3 and H4: AWG 22), TR 64, bared and tin-plated. Air exhaust over bars. Rotational direction clockwise looking at rotor. Mass: 240 g (H3 and H4: 280 g).
Connection line	Single strands AWG 24, TR 64, bared and tin-plated.
Direction of rotation	Right, looking at rotor
Direction of air flow	Air exhaust over bars
Bearing	Ball bearings
Lifetime L10 at 40 °C	70000 h
Lifetime L10 at maximum temperature	35000 h
Mass	0.240 kg
Housing material	Fiberglass-reinforced PBT plastic
Material of impeller	Fiberglass-reinforced PA plastic
Motor protection	Protected against reverse polarity and locking.
Approval	VDE, CSA, UL



3212 JN

DC axial compact fan

Product drawing

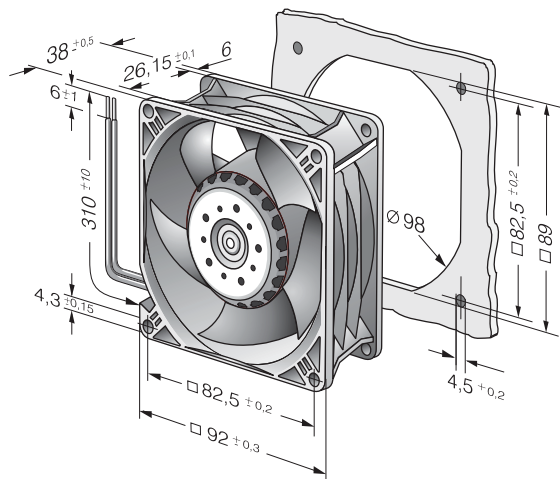

3212 JN

DC axial compact fan

Charts: Air flow

