

## KARTA KATALOGOWA

# 4312 NL

Wentylator osiowy kompaktowy DC


Producent: ebm-papst


**Dane znamionowe**

|                               |                       |
|-------------------------------|-----------------------|
| Napięcie znamionowe           | 12 V DC (6...15 V DC) |
| Prędkość obrotowa             | 1450 obr/min          |
| Pobór mocy                    | 0,9 W                 |
| Pobór prądu                   | 75 mA                 |
| Wydajność                     | 100 m³/h              |
| Maks. ciśnienie statyczne     | 21 Pa                 |
| Poziom ciśnienia akustycznego | 27 dB(A)              |
| Poziom mocy akustycznej       | 4,1 B                 |
| Temperatura otoczenia         | -20...+75 °C          |

**Budowa**

|                      |                     |
|----------------------|---------------------|
| Wymiary              | 119 × 119 × 32 mm   |
| Materiał wirnika     | tworzywo sztuczne   |
| Obudowa              | tworzywo sztuczne   |
| Kierunek przepływu   | wydmuch przez żebra |
| Łożyskowanie         | kulkowe             |
| Podłączenie          | przewody            |
| Trwałość L10 (40 °C) | 95000 h             |

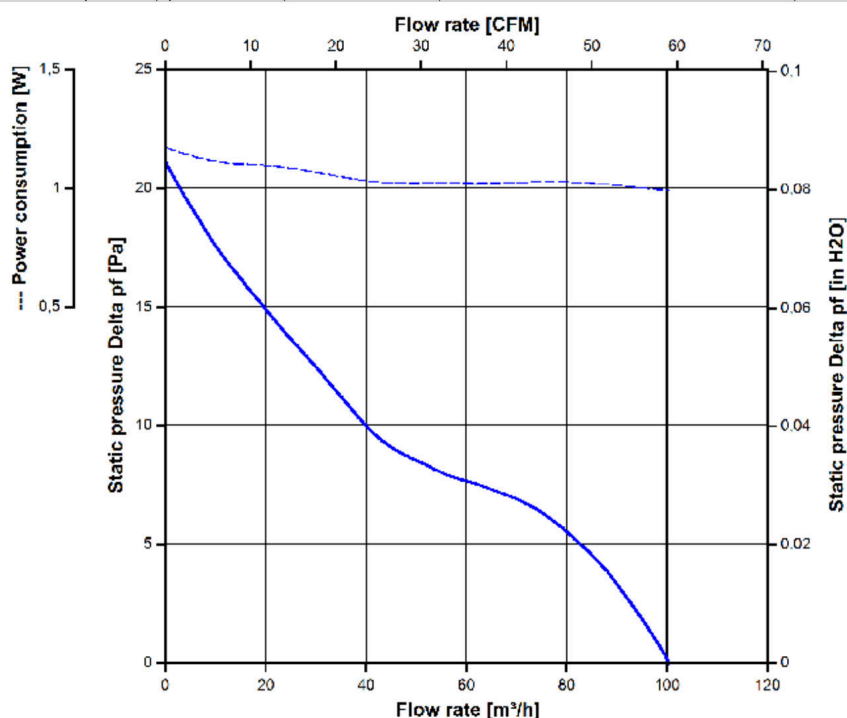**Charakterystyka przepływowa**

**ebm-papst**

03/16/2018

page 6 of 11

Dane na okładce odczytane z karty produktu ebm-papst (oryginał na kolejnych stronach).  
 Producent zastrzega możliwość zmian.

**Dobór, wycena i dostawa – zapytaj LUFTBERG**

tel. +48 600 100 371 · tel. +48 604 959 199  
 biuro@luftberg.pl · www.luftberg.pl

## Product Data Sheet 4312 NL

**ebm****papst**

The engineer's choice



**Product Data Sheet 4312 NL**

**4312 NL**

**INDEX**

|          |                                 |           |
|----------|---------------------------------|-----------|
| <b>1</b> | <b>General.....</b>             | <b>3</b>  |
| <b>2</b> | <b>Mechanics.....</b>           | <b>3</b>  |
| 2.1      | General.....                    | 3         |
| 2.2      | Connections.....                | 3         |
| <b>3</b> | <b>Operating Data .....</b>     | <b>4</b>  |
| 3.1      | Electrical Operating Data ..... | 4         |
| 3.2      | Electrical Features.....        | 4         |
| 3.3      | Aerodynamics.....               | 6         |
| 3.4      | Sound Data.....                 | 8         |
| <b>4</b> | <b>Environment .....</b>        | <b>8</b>  |
| 4.1      | General.....                    | 8         |
| 4.2      | Climatic Requirements .....     | 8         |
| 4.3      | Mechanical Requirements.....    | 8         |
| <b>5</b> | <b>Safety .....</b>             | <b>10</b> |
| 5.1      | Electrical Safety.....          | 10        |
| 5.2      | Approval Tests .....            | 10        |
| <b>6</b> | <b>Reliability .....</b>        | <b>10</b> |
| 6.1      | General.....                    | 10        |

**Product Data Sheet 4312 NL**
**1 General**

|                                     |                        |  |
|-------------------------------------|------------------------|--|
| Fan type                            | Fan                    |  |
| Rotating direction looking at rotor | Clockwise              |  |
| Airflow direction                   | Air outlet over struts |  |
| Bearing system                      | Ball bearing           |  |
| Mounting position - shaft           | Any                    |  |

**2 Mechanics**
**2.1 General**

|                                                       |                                                                         |  |
|-------------------------------------------------------|-------------------------------------------------------------------------|--|
| Width                                                 | 119,0 mm                                                                |  |
| Height                                                | 119,0 mm                                                                |  |
| Depth                                                 | 32 mm                                                                   |  |
| Mass                                                  | 0,23 kg                                                                 |  |
| Housing material                                      | Plastic                                                                 |  |
| Impeller material                                     | Plastic                                                                 |  |
| Max. torque when mounted across both mounting flanges | Wire outlet corner: 80 Ncm<br>Remaining corners: 80 Ncm                 |  |
| Screw size                                            | ISO 4762 - M4 degreased, without an additional brace and without washer |  |
| Rotor protrusion max.                                 | 0,4 mm                                                                  |  |

**2.2 Connections**

|                       |             |  |
|-----------------------|-------------|--|
| Electrical connection | Wires       |  |
| Lead wire length      | L = 310 mm  |  |
| Tolerance             | + - 10,0 mm |  |
| Wire size (AWG)       | 24          |  |
| Insulation diameter   | 1,5 mm      |  |



| Wire | Color | Operation |
|------|-------|-----------|
| 1    | red   | + UB      |
| 2    | blue  | - GND     |

**Product Data Sheet 4312 NL**
**3 Operating Data**
**3.1 Electrical Operating Data**

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.


$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)  
 I: corresp. to arithm. mean current value

| Features                     | Condition      | Symbol | Values                 |                         |                        |
|------------------------------|----------------|--------|------------------------|-------------------------|------------------------|
| Voltage range                |                | U      | 6 V                    |                         | 15 V                   |
| Nominal voltage              |                | $U_N$  |                        | 12 V                    |                        |
| Power consumption            | $\Delta p = 0$ | P      | 0,2 W<br>+- 17,5 %     | 0,9 W<br>+- 12,5 %      | 1,5 W<br>+- 15 %       |
| Tolerance                    | 0010           |        |                        |                         |                        |
| Current consumption          | $\Delta p = 0$ | I      | 35 mA<br>+- 17,5 %     | 75 mA<br>+- 12,5 %      | 100 mA<br>+- 15 %      |
| Tolerance                    | 0010           |        |                        |                         |                        |
| Speed                        | $\Delta p = 0$ | n      | 725 1/min<br>+- 12,5 % | 1.450 1/min<br>+- 7,5 % | 1.800 1/min<br>+- 10 % |
| Tolerance                    | 0010           |        |                        |                         |                        |
| Starting current consumption |                |        |                        | 280 mA                  |                        |

**3.2 Electrical Features**

|                                |                                  |  |
|--------------------------------|----------------------------------|--|
| Electronic function            | None                             |  |
| Reversed polarity protection   | Rectifying diode                 |  |
| Max. residual current at $U_N$ | $I_F < 100 \mu A$                |  |
| Locked rotor protection        | Auto restart                     |  |
| Locked rotor current at $U_N$  | $I_{block}$ approx. 700 mA       |  |
| Clock signal at locked rotor   | $t_3 / t_4$ typical: 0,5 s / 3 s |  |

**Product Data Sheet 4312 NL**

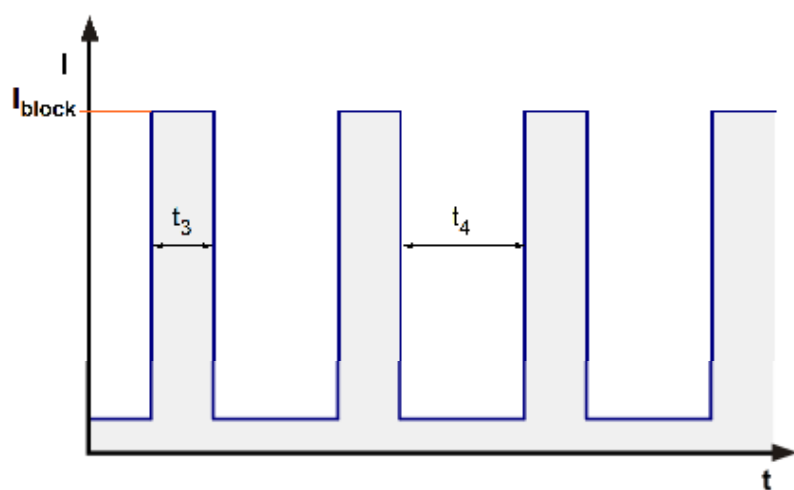

Product Data Sheet 4312 NL

### 3.3 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.

Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;


In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions. Power consumption of the fan motor when operating at normal voltage is shown. Depending on the operating conditions of the application, the power input may be higher.

a.) Operation condition:

1.450 1/min at free air flow

|                                                           |                       |  |
|-----------------------------------------------------------|-----------------------|--|
| Max. free-air flow ( $\Delta p = 0$ / $= \text{max.}$ )   | 100 m <sup>3</sup> /h |  |
| Max. static pressure ( $\Delta p = \text{max.}$ / $= 0$ ) | 21 Pa                 |  |

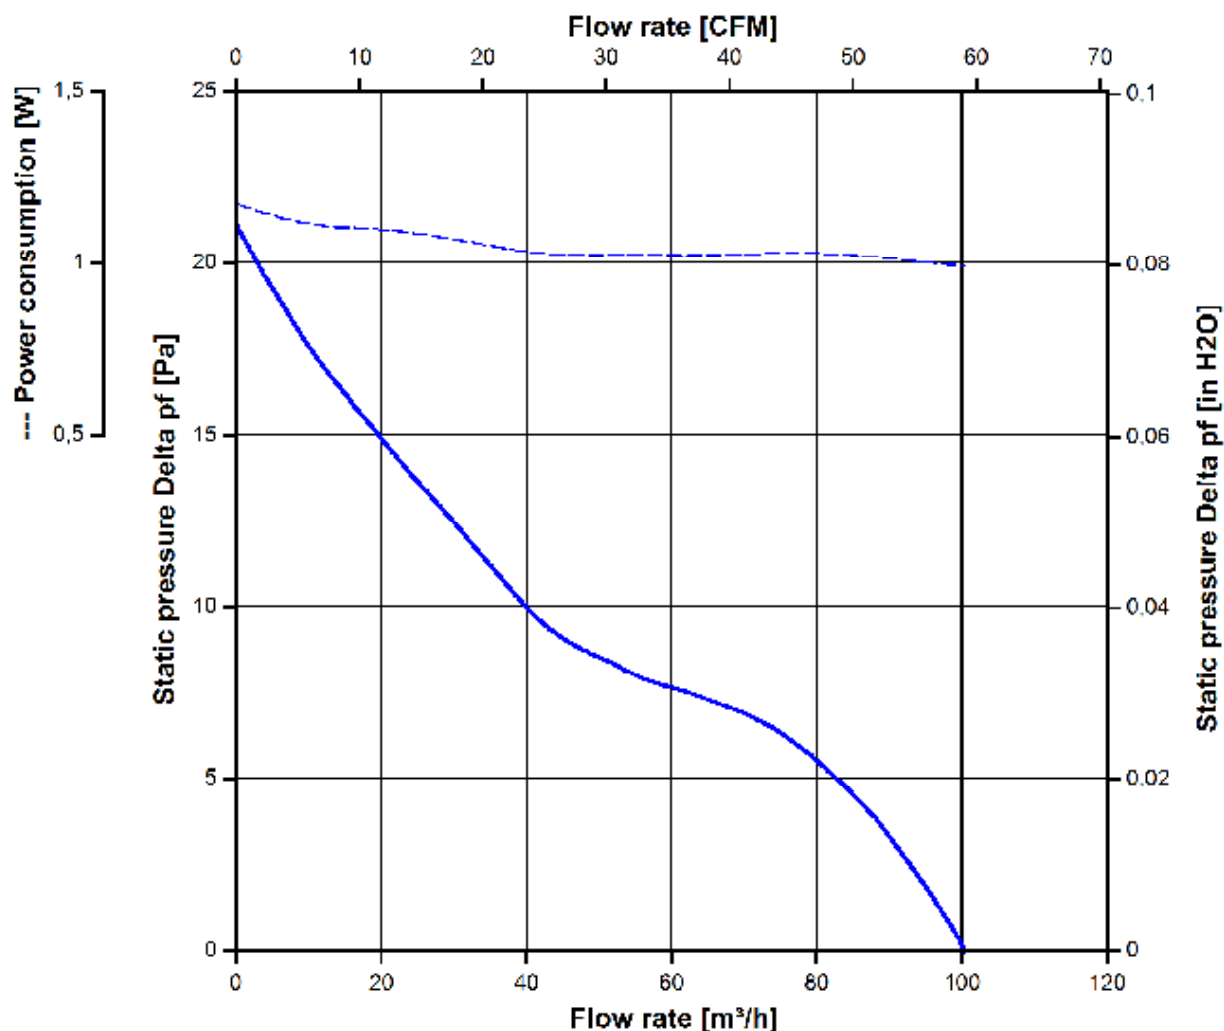

**Product Data Sheet 4312 NL**

**Product Data Sheet 4312 NL**
**3.4 Sound Data**

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
 Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

|                              |
|------------------------------|
| 1.450 1/min at free air flow |
|------------------------------|

|                                                                 |                             |  |
|-----------------------------------------------------------------|-----------------------------|--|
| Optimal operating point                                         | 70 m <sup>3</sup> /h @ 7 Pa |  |
| Sound power level at the optimal operating point                | 4,1 bel(A)                  |  |
| Sound pressure level at free air flow, measured in rubber bands | 27 dB(A)                    |  |

**4 Environment**
**4.1 General**

|                                            |        |  |
|--------------------------------------------|--------|--|
| Min. permitted ambient temperature TU min. | -20 °C |  |
| Max. permitted ambient temperature TU max. | 75 °C  |  |
| Min. permitted storage temperature TL min. | -40 °C |  |
| Max. permitted storage temperature TL max. | 80 °C  |  |

**4.2 Climatic Requirements**

|                       |                                                               |  |
|-----------------------|---------------------------------------------------------------|--|
| Humidity requirements | humid heat, constant; according to DIN EN 60068-2-78, 14 days |  |
| Water exposure        | None                                                          |  |
| Dust requirements     | None                                                          |  |
| Salt fog requirements | None                                                          |  |

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

**4.3 Mechanical Requirements**

| severity level | Vibration (sinusoidal)                                                                                                                                       |                                                                                                            |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| 0,5 G          | Vibration (sinusoidal) in use<br>IEC 60068-2-6<br>Displacement / frequency range<br>Acceleration / frequency range<br>Sweep rate<br>Sweep cycles<br>Duration | Vibration (sinusoidal)<br>0,035 mm / 10-60, 60-10 Hz<br>0,5 G / 60-500-60 Hz<br>1 Oct./min<br>10<br>2 hrs. |

**Product Data Sheet 4312 NL**

|  |                   |   |
|--|-------------------|---|
|  | Axes of vibration | 3 |
|--|-------------------|---|

| severity level | stationary use              |                                                                                                                                            |                                                                                                                        |
|----------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| 1              | storage /<br>transportation | Random vibration not in use<br>IEC 60068-2-64<br>Frequency range / ASD<br><br>$G_{RMS}$<br>Axes of vibration<br>Test duration              | Random vibration<br>5 - 20 Hz : $1,0 \text{ m}^2 / \text{s}^3$<br>20 - 500 Hz : - 3 dB / Oct<br>0,91 G<br>3<br>3 x 5 h |
|                | storage /<br>transportation | Bump not in use<br>IEC 60068-2-29<br>Shock spectrum<br>Acceleration<br>Duration<br>Number of bumps (+X, -X, -Y, +Y, -Z, +Z)<br>Total bumps | Bump<br>half sine<br>18 G<br>6 ms<br>100 in each direction<br>600                                                      |
|                | stationary use              | Random vibration in use<br>IEC 60068-2-64<br>Frequency range / ASD<br><br>$G_{RMS}$<br>Axes of vibration<br>Test duration                  | Random vibration<br>5 - 20 Hz : $2,0 \text{ m}^2 / \text{s}^3$<br>20- 150 Hz : - 3 dB / Oct<br>0,83 G<br>3<br>3 x 5 h  |
|                | stationary use              | Bump in use<br>IEC 60068-2-29<br>Shock spectrum<br>Acceleration<br>Duration<br>Number of bumps (+X, -X, -Y, +Y, -Z, +Z)<br>Total bumps     | Bump<br>half sine<br>5 G<br>11 ms<br>100 in each direction<br>600                                                      |

**Product Data Sheet 4312 NL**
**5 Safety**
**5.1 Electrical Safety**

|                                                                                                                                                                                                                                                                                                                                                                                           |                                        |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|--|
| Dielectric strength<br>DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700)<br>A.) Type test<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C.<br>No arcing or breakdown is allowed!<br>All connections together to ground.<br>B.) Routine test<br>Measuring conditions: At indoor climate.<br>No arcing or breakdown is allowed!<br>All connections together to ground. | 500 VAC / 1 Min.<br><br>Not applicable |  |
| Isolation resistance<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.                                                                                                                                                                                                                                                                | RI > 10 MOhm                           |  |
| Clearance / creepage distance                                                                                                                                                                                                                                                                                                                                                             | 1,0 mm / 1,2 mm                        |  |
| Protection class                                                                                                                                                                                                                                                                                                                                                                          | III                                    |  |

**5.2 Approval Tests**

|     |                                                                     |                                                                               |
|-----|---------------------------------------------------------------------|-------------------------------------------------------------------------------|
| CE  | EC Declaration of Conformity                                        | Yes                                                                           |
| EAC | Eurasian Conformity                                                 | Yes                                                                           |
| UL  | Underwriters Laboratories                                           | Yes / UL507, Electric Fans                                                    |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Canadian Standards Association                                      | Yes / C22.2 No. 113 Fans and Ventilators                                      |
| CCC | China Compulsory Certification                                      | Not applicable                                                                |

**6 Reliability**
**6.1 General**

|                                                    |           |  |
|----------------------------------------------------|-----------|--|
| Life expectancy L10 at TU = 40 °C                  | 95.000 h  |  |
| Life expectancy L10 at TU max.                     | 37.500 h  |  |
| Life expectancy L10 acc. to IPC 9591 at TU = 40 °C | 160.000 h |  |

