

KARTA KATALOGOWA

612 NGNI

Wentylator osiowy DC


Producent: ebm-papst


Dane znamionowe

Napięcie znamionowe	12 V DC (8...12,6 V DC)
Prędkość obrotowa	5100 obr/min
Pobór mocy	2,4 W
Wydajność	41 m³/h
Poziom ciśnienia akustycznego	35 dB(A)
Poziom mocy akustycznej	5,0 B
Temperatura otoczenia	-20...+65 °C

Budowa

Wymiary	60 × 60 × 25 mm
Materiał wirnika	tworzywo PA wzmocnione włóknem szklanym
Masa	0,066 kg

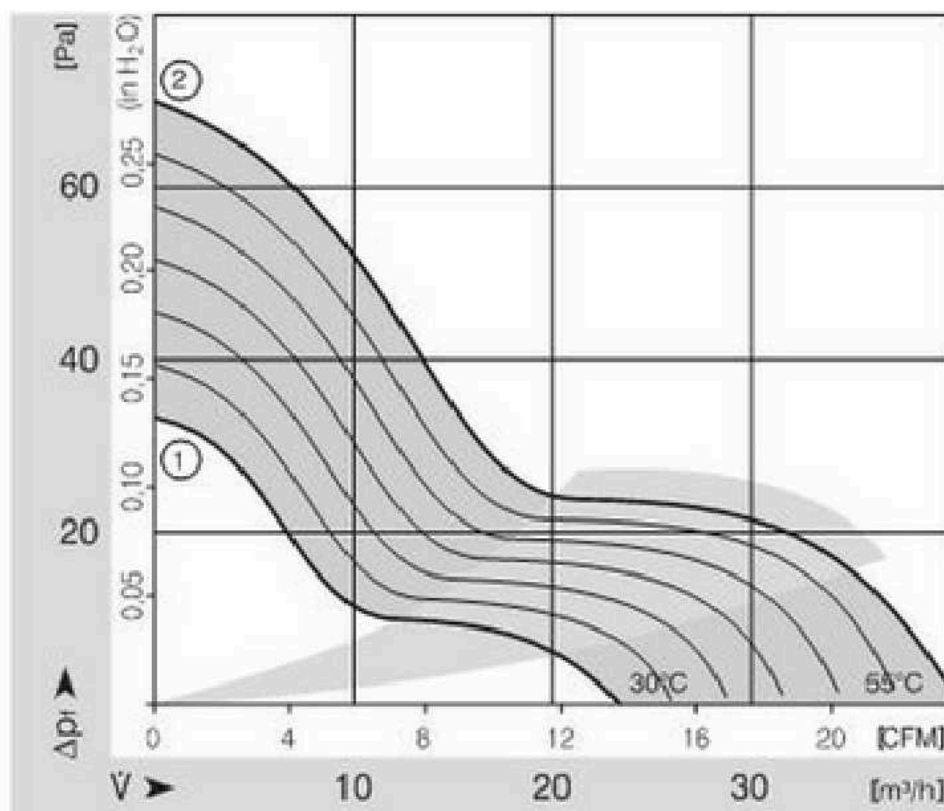Charakterystyka przepływowa
Characteristic: Pressure over air flow


Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
 Producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
 biuro@luftberg.pl · www.luftberg.pl

DC axial fan


Series 600 N VARIOFAN 60 x 60 x 25



- **General description:** DC fan with electronically commutated external rotor motor. Commutation electronics completely integrated. Speed control using temperature sensor.
- **Impeller material:** Fiberglass-reinforced PA plastic
- **Housing material:** Fiberglass-reinforced PBTP plastic

Nominal data		Voltage		Voltage range VDC	Air flow	Speed	Power consumption	Sound level	Sound pressure level	Ambient temperature	L10 service life at 40 °C	L10 service life at max. temp.	Weight
Type	Motor	VDC	VDC	VDC	m³/h	1/min	W	Bel	dB(A)	°C	h	h	kg
612 NGNI	--	12	8	12.6	41	5100	2.4	5.0	35	-20 .. 65	70000	40000	0.066
Subject to modification													


Characteristic: Pressure over air flow

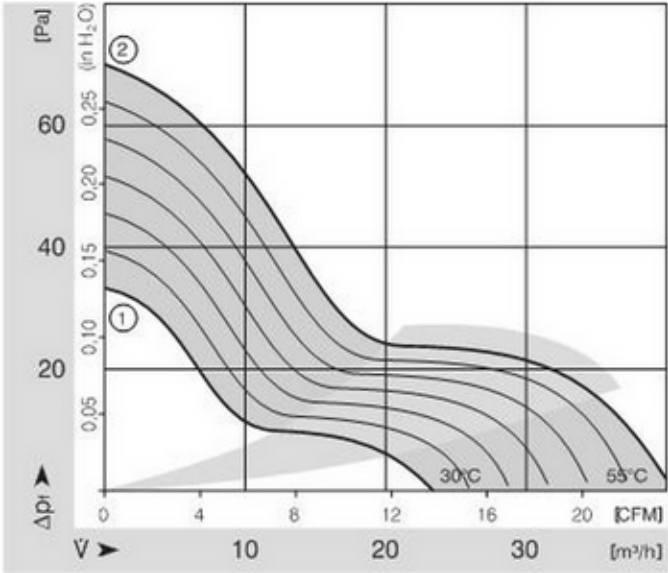


DC axial fan

Series 600 N VARIOFAN 60 x 60 x 25

Specific drawing

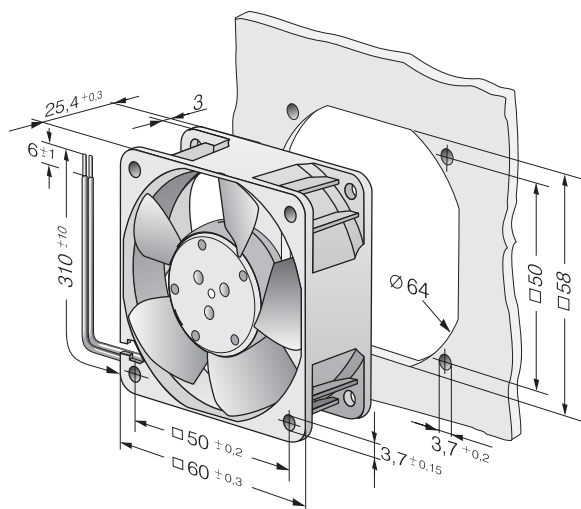

Specific drawing

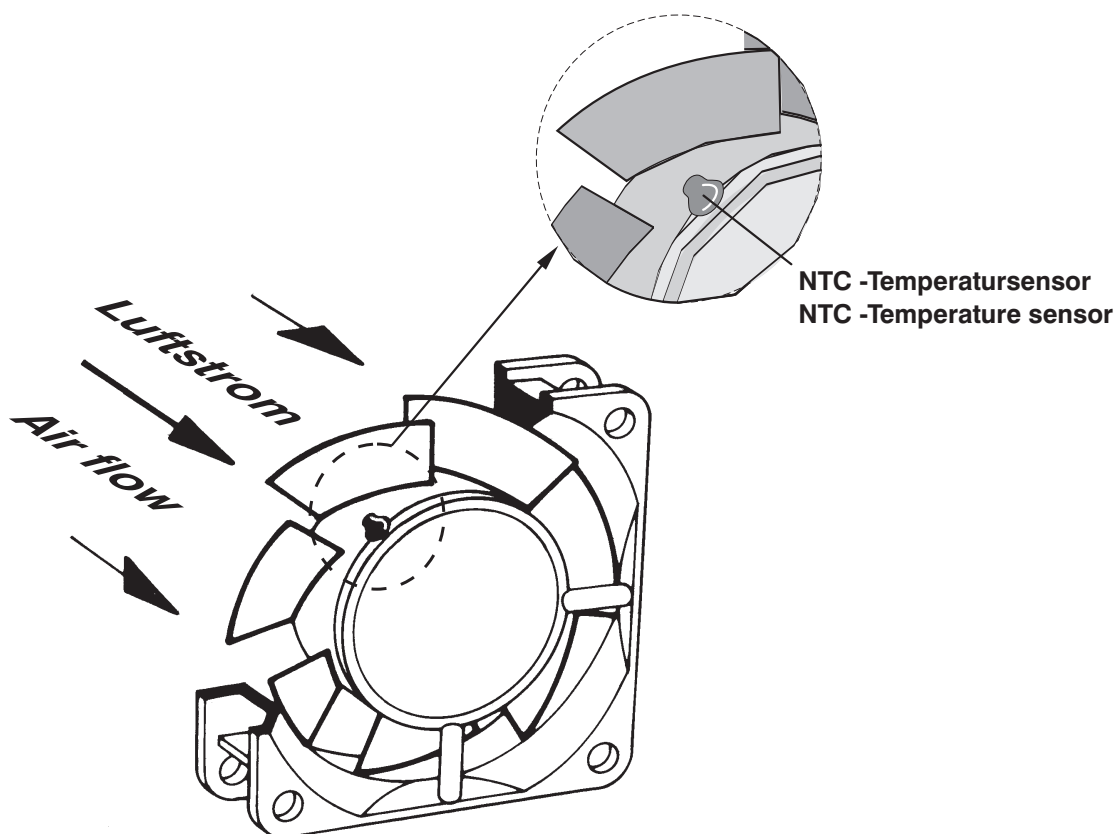

DC axial fan

Series 600 N VARIOFAN 60 x 60 x 25

Technical description

- **General description:** DC fan with electronically commutated external rotor motor. Commutation electronics completely integrated. Speed control using temperature sensor.
- **Housing material:** Fiberglass-reinforced PBTP plastic
- **Direction of rotation:** Right, looking at rotor
- **Electrical connection:** 2 single strands AWG 22, TR 64
- **Approvals:** VDE, CSA, UL, CE
- **Impeller material:** Fiberglass-reinforced PA plastic
- **Bearings:** Sintec sleeve bearing system
- **Direction of air flow:** Air exhaust over bars
- **Motor protection:** With electronic reverse polarity protection. The fan runs only if the polarity is correct.

Contact


ebm-papst St. Georgen GmbH & Co. KG

Hermann-Papst-Straße 1
 D-78112 St. Georgen
 Phone +49 (0) 7724 / 81-0
 Fax +49 (0) 7724 / 81-1309
 info2@de.ebmpapst.com
 www.ebmpapst.com

Guard grille

Order No.

LZ28-1

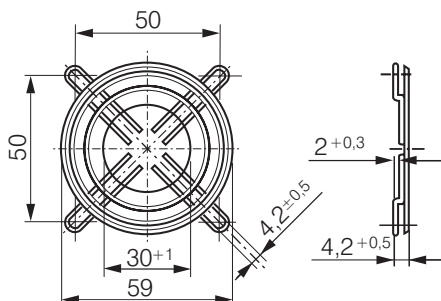

Technical description

 - **General description:** Guard grille in accordance with EN 294

 - **Material:** Rust-protected steel wire

Contact

ebm-papst St. Georgen GmbH & Co. KG

Hermann-Papst-Straße 1

D-78112 St. Georgen

Phone +49 (0) 7724 / 81-0

Fax +49 (0) 7724 / 81-1309


info2@de.ebmpapst.com

www.ebmpapst.com

Temperature sensor

Order No.

LZ370


 Benötigte Grenzwerte:
Required performance data:

 $R_{25} = 100 \text{ K}\Omega \pm 5\%$
 $B_{\text{Wert}} = 4190 \pm 2\%$
 $P_{\text{max}} = 0,25 \text{ W}$

Technical description

- **General description:** Temperature sensor for speed-controlled fan operation. Temperature range 30 to 50 °C

- **Note:** In addition to the accessories and mounting parts listed here, ebm-papst supplies a wide variety of other resources for fan operation, some of which are very specialized. The sales experts at ebm-papst will be happy to assist you in your inquiries concerning fan assembly and application.

Contact

ebm-papst St. Georgen GmbH & Co. KG

Hermann-Papst-Straße 1

D-78112 St. Georgen

Phone +49 (0) 7724 / 81-0

Fax +49 (0) 7724 / 81-1309


info2@de.ebmpapst.com

www.ebmpapst.com

Filter guard grille

Order No.

FF60

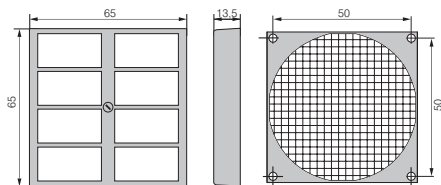

Technical description

- **General description:** Filter guard grille, consisting of 3 parts: the outer grille barrier, the inner fastening plate and the replaceable filter mat. A quick-release on the grille barrier allows for quick and easy filter mat changes.

- **Material:** Grille barrier molded of polycarbonate (PC) with matte surface. Wire-mesh fastening plate, black powder coating.

Contact

ebm-papst St. Georgen GmbH & Co. KG

Hermann-Papst-Straße 1
D-78112 St. Georgen
Phone +49 (0) 7724 / 81-0
Fax +49 (0) 7724 / 81-1309
info2@de.ebmpapst.com
www.ebmpapst.com