KARTA KATALOGOWA

624 HH

Wentylator osiowy kompaktowy DC

Producent: ebm-papst

Dane znamionowe

Napięcie znamionowe	**24 V DC (18…28 V DC)**
Prędkość obrotowa	**8200 obr/min**
Pobór mocy	**3,6 W**
Wydajność	**56 m³/h**
Maks. ciśnienie statyczne	**125 Pa**
Poziom ciśnienia akustycznego	**43 dB(A)**
Poziom mocy akustycznej	**5,6 B**
Temperatura otoczenia	**−20…+70 °C**

Budowa

Wymiary	**60 × 60 × 25 mm**
Materiał wirnika	**tworzywo PA wzmocnione włóknem szklanym**
Obudowa	**tworzywo PBT wzmocnione włóknem szklanym**
Kierunek obrotów	**w prawo, patrząc na wirnik**
Kierunek przepływu	**wydmuch przez żebra**
Zabezpieczenie silnika	**ochrona przed odwrotną polaryzacją i zablokowaniem wirnika**
Ochrona przed zablokowaniem	**ochrona przed zablokowaniem i przeciążeniem**
Łożyskowanie	**kulkowe**
Podłączenie	**przewody AWG 22, odizolowane i ocynowane**
Trwałość L10 (40 °C)	**65000 h**
Masa	**0,085 kg**

Charakterystyka przepływowa

Charts: Air flow

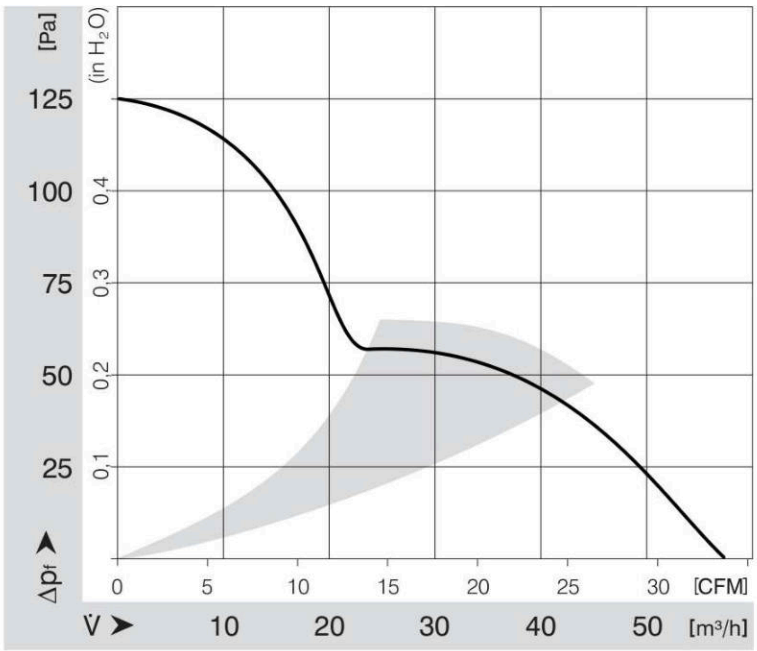

Dane na okładce odczytane z karty katalogowej ebm-papst (oryginał na kolejnych stronach).
Producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

624 HH

DC axial compact fan

ebm-papst St. Georgen GmbH & Co. KG
Hermann-Papst-Straße 1
D-78112 St. Georgen
Phone +49 7724 81-0
Fax +49 7724 81-1309
info2@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	624 HH	
Nominal voltage	VDC	24
Nominal voltage range	VDC	18 .. 28
Speed	min^{-1}	8200
Power input	W	3.6
Min. ambient temperature	°C	-20
Max. ambient temperature	°C	70
Air flow	m^3/h	56
Sound power level	B	5.6
Sound pressure level	dB(A)	43

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

624 HH

DC axial compact fan

Technical features

General description	Particular design features: Rigid compression curve for high air flow at high counterpressure. Motor has very low structure-borne noise. Innovative impeller with winglets for low noise. Control inputs and alarm and speed signals available on request. General features: Material: fibreglass-reinforced plastic. Impeller PA, housing PBT. Electronic commutation completely integrated. Protected against reverse polarity and locking. Connection via single strands AWG 22, TR 64, bared and tin-plated. Air exhaust over bars. Rotational direction clockwise looking at rotor. Mass: 85 g.
Mass	0.085 kg
Dimensions	60 x 60 x 25 mm
Material of impeller	Fiberglass-reinforced PA plastic
Housing material	Fiberglass-reinforced PBT plastic
Direction of air flow	Air exhaust over bars
Direction of rotation	Right, looking at rotor
Bearing	Ball bearings
Lifetime L10 at 40 °C	65000 h
Lifetime L10 at maximum temperature	32500 h
Connection line	Single strands AWG 22, TR 64, bared and tin-plated.
Motor protection	Protected against reverse polarity and locking.
Locked-rotor protection	With electronic blocking and overload protection
Approval	VDE, CSA, UL, CE

ebm-papst St. Georgen GmbH & Co. KG · Hermann-Papst-Straße 1 · D-78112 St. Georgen · Phone +49 7724 81-0 · Fax +49 7724 81-1309 · info2@de.ebmpapst.com · www.ebmpapst.com

624 HH

DC axial compact fan

Product drawing

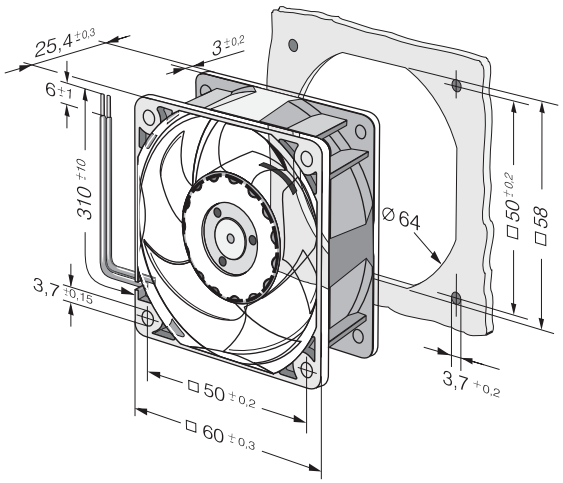

ebm-papst St. Georgen GmbH & Co. KG · Hermann-Papst-Straße 1 · D-78112 St. Georgen · Phone +49 7724 81-0 · Fax +49 7724 81-1309 · info2@de.ebmpapst.com · www.ebmpapst.com

624 HH

DC axial compact fan

Charts: Air flow

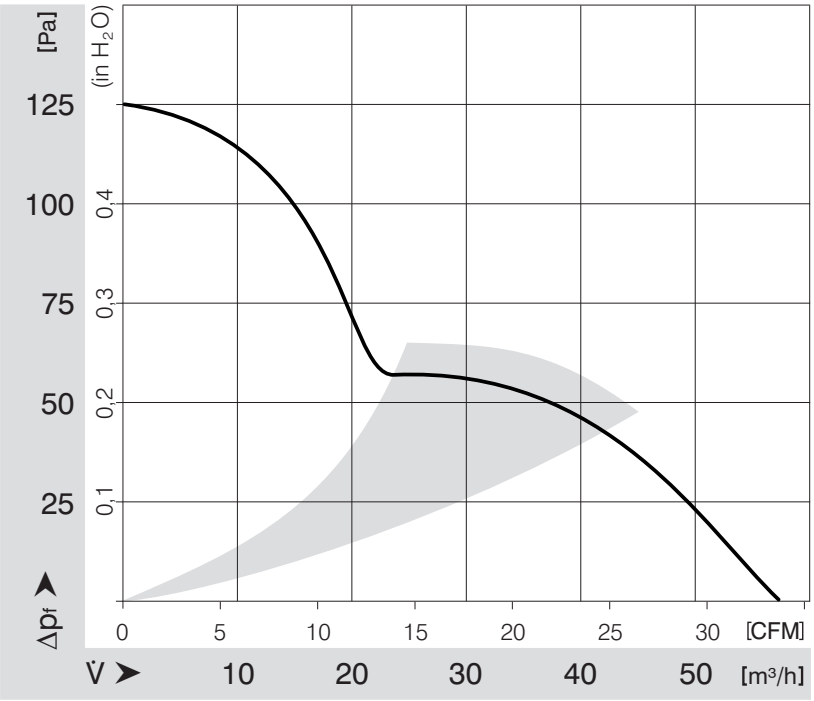

ebm-papst St. Georgen GmbH & Co. KG · Hermann-Papst-Straße 1 · D-78112 St. Georgen · Phone +49 7724 81-0 · Fax +49 7724 81-1309 · info2@de.ebmpapst.com · www.ebmpapst.com