

KARTA KATALOGOWA

6314 HR


Wentylator osiowy kompaktowy DC

Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	24 V DC (12...28 V DC)	Wymiary	Ø 172 × 51 mm
Prędkość obrotowa	4900 obr/min	Materiał wirnika	tworzywo sztuczne
Pobór mocy	30 W	Obudowa	metal
Pobór prądu	1250 mA	Kierunek przepływu	wydmuch przez żebra
Wydajność	510 m³/h	Łożyskowanie	kulkowe
Maks. ciśnienie statyczne	380 Pa	Trwałość L10 (40 °C)	77500 h
Poziom ciśnienia akustycznego	60 dB(A)		
Poziom mocy akustycznej	7,0 B		
Temperatura otoczenia	-20...+70 °C		

Charakterystyka przepływowa

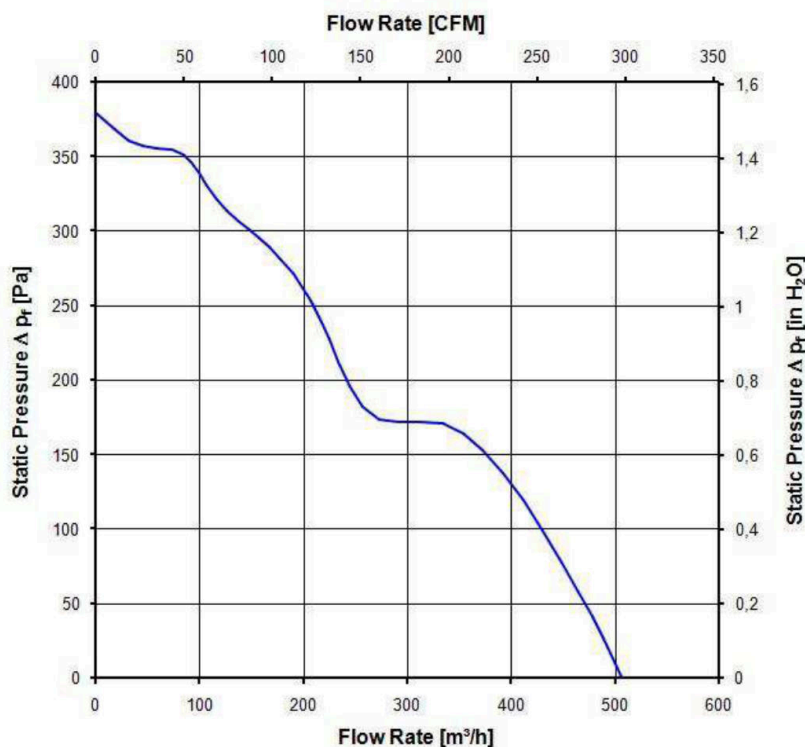

Dane na okładce odczytane z karty produktu ebm-papst (oryginał na kolejnych stronach).
 Producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
 biuro@luftberg.pl · www.luftberg.pl

Product Data Sheet

9295414902
VWS0148XULCZ
6314 HR-902

ebm**papst**

The engineer's choice



Product Data Sheet**6314 HR-902**[LUFTBERG wentylatory
www.wentylatory-online.pl](http://www.wentylatory-online.pl)

Product Data Sheet

LUFTBERG wentylatory
www.wentylatory-online.pl

1 General

Fan type	Fan	
Rotating direction looking at rotor	Counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	

2 Mechanics
2.1 General


Depth	51,0 mm	
Diameter	172,0 mm	
Mass	0,820 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 460 Ncm Remaining corners: 460 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires - Plug	
Lead wire length	L = 350 mm	
Tolerance	+ - 10,0 mm	
Tube length	S = 10 mm	
Tolerance	+ - 2 mm	
Plug	See drawing	
Contact	See drawing	

Product Data Sheet

LUFTBERG wentylatory
www.wentylatory-online.pl

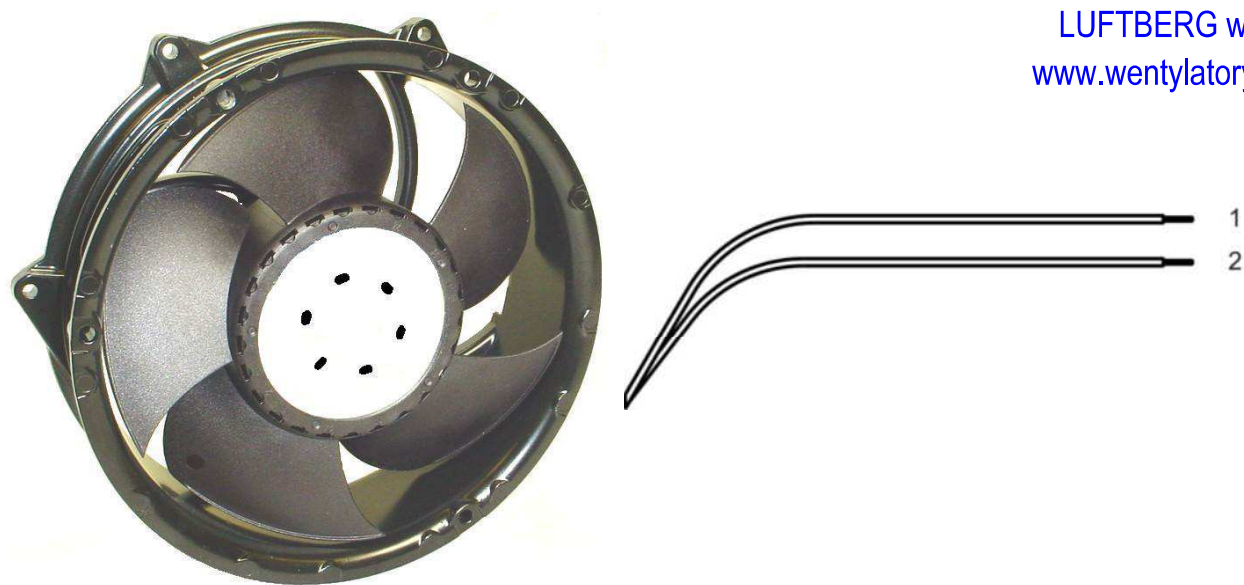

Wire	Color	Operation	Plug connection	Wire size	Insulation diameter
1	red	+ UB	Pin 1	AWG 22	1,7 mm
2	blue	- GND	Pin 2	AWG 22	1,7 mm

Product Data Sheet

LUFTBERG wentylatory
www.wentylatory-online.pl

3 Operating Data

3.1 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)

I: corresp. to arithm. mean current value

To note inrush current @ U nom:

The internal electrolytic capacitor has no resistor or inrush current limitation, essentially the type and length of the connecting cable is limiting the Inrush current.


Features	Condition	Symbol	Values		
Voltage range		U	12 V		28 V
Nominal voltage		U _N		24 V	
Power consumption	$\Delta p = 0$	P	7 W	30 W	31 W
Tolerance	0010		+/- 15 %	+/- 12,5 %	+/- 12,5 %
Current consumption	$\Delta p = 0$	I	585 mA	1.250 mA	110 mA
Tolerance	0010		+/- 15 %	+/- 12,5 %	+/- 12,5 %
Speed	$\Delta p = 0$	n	2.700 1/min	4.900 1/min	4.900 1/min
Tolerance	0010		+/- 10 %	+/- 10 %	+/- 10 %
Starting current consumption				2.600 mA	

Product Data Sheet

LUFTBERG wentylatory
www.wentylatory-online.pl

3.2 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at U_N	$I_F \leq 10 \text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block}	
Clock signal at locked rotor	t_3 / t_4 typical: 0,5 s / 5,0 s	

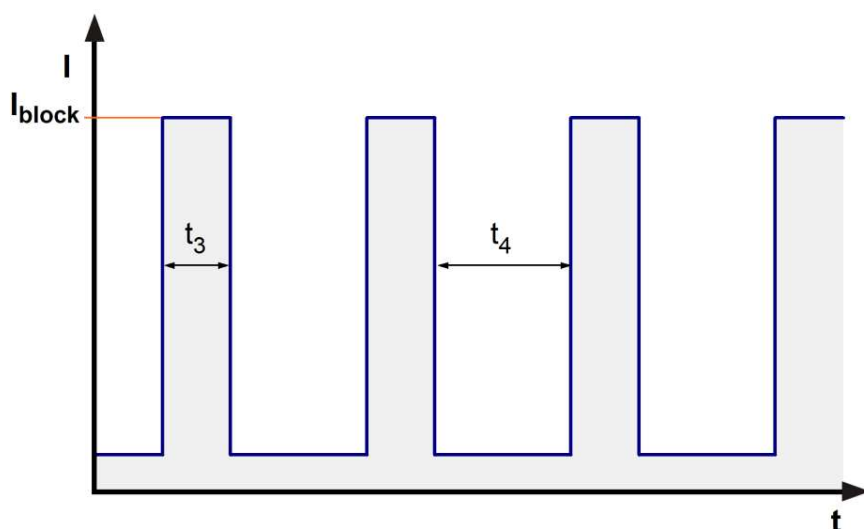

Product Data Sheet
3.3 Aerodynamics

LUFTBERG wentylatory
www.wentylatory-online.pl

Measurement
 conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.

Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;

In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

4.900 1/min at free air flow

Max. free-air flow ($\Delta p = 0 / \dot{V} = \max.$)	510,0 m ³ /h	
Max. static pressure ($\Delta p = \max. / \dot{V} = 0$)	380 Pa	



Product Data Sheet

3.4 Sound Data

LUFTBERG wentylatory
www.wentylatory-online.pl

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

4.900 1/min at free air flow

Optimal operating point	410,0 m ³ /h @ 107 Pa	
Sound power level at the optimal operating point	7,0 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	60,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, cyclic; according to DIN EN 60068-2-30, 6 cycle	
Water exposure	None	
Dust requirements	Dust check; according to DIN EN 60068-2-68, 6g/m ² d, 1 day	
Salt fog requirements	None	

Permitted application area:

The product is for the use in sheltered rooms with limited controlled temperature. Occasionally condensed water is allowed. Direct exposure to water must be avoided. Saline ambient conditions must be avoided.

Pollution degree 2 (according DIN EN 60664-1)

It occurs only non-conductive pollution. Occassionally, temporary conductivity caused by condensation occurs.

Please require severity levels and specification parameters from the responsible development departments.

Product Data Sheet

LUFTBERG wentylatory
www.wentylatory-online.pl

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 850 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans E38324
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Not applicable

6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	77.500 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	130.000 h	

