

KARTA KATALOGOWA

6314 N/2HHP

Wentylator osiowy kompaktowy DC


Producent: ebm-papst



Zdjęcie poglądowe

Dane znamionowe		Budowa	
Napięcie znamionowe	24 V DC (16...32 V DC)	Wymiary	Ø 172 × 51 mm
Prędkość obrotowa	4000 obr/min	Materiał wirnika	tworzywo sztuczne
Pobór mocy	32 W	Obudowa	metal
Pobór prądu	1300 mA	Kierunek przepływu	wydmuch przez żebra
Wydajność	540 m³/h	Łożyskowanie	kulkowe
Maks. ciśnienie statyczne	280 Pa	Podłączenie	przewody
Poziom ciśnienia akustycznego	60 dB(A)	Trwałość L10 (40 °C)	80000 h
Poziom mocy akustycznej	6,6 B		
Temperatura otoczenia	-20...+70 °C		

Charakterystyka przepływowa

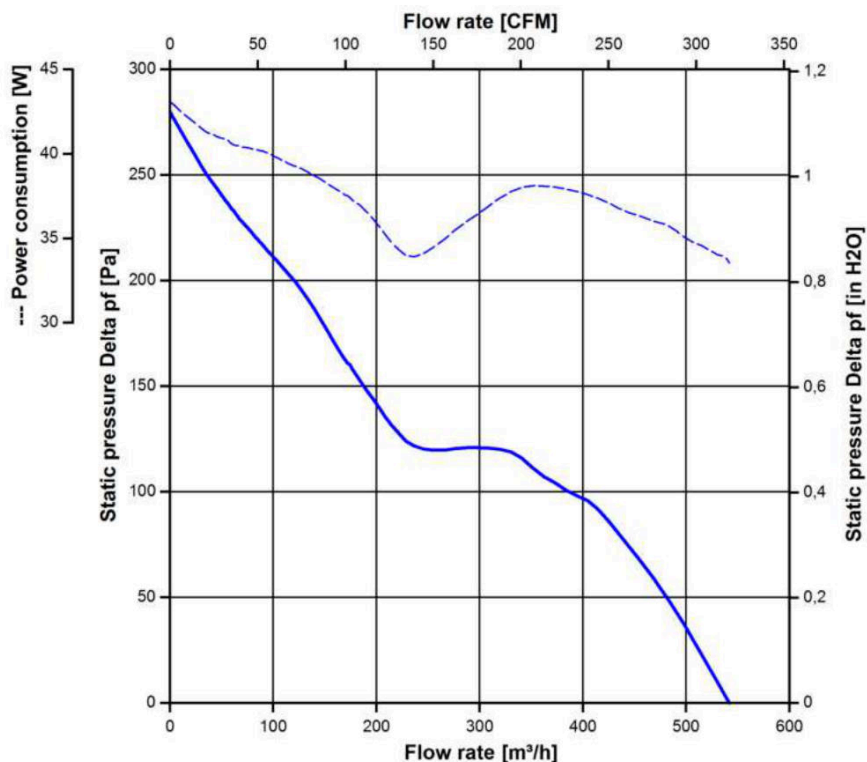

Dane na okładce odczytane z karty produktu ebm-papst (oryginał na kolejnych stronach).
 Producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
 biuro@luftberg.pl · www.luftberg.pl

Product Data Sheet

9695480300
VWS0148PULCS
6314 N/2HHP

ebm**papst**

The engineer's choice



Product Data Sheet

9695480300
VWS0148PULCS
6314 N/2HHP

6314 N/2HHP

INDEX

1	General	3
2	Mechanics	3
2.1	General.....	3
2.2	Connections.....	3
3	Operating Data	5
3.1	Electrical Interface - Input.....	5
3.2	Electrical Operating Data	6
3.3	Electrical Interface - Output.....	7
3.4	Electrical Features	8
3.5	Aerodynamics	9
3.6	Sound Data.....	10
4	Environment.....	10
4.1	General.....	10
4.2	Climatic Requirements	10
5	Safety.....	11
5.1	Electrical Safety	11
5.2	Approval Tests.....	11
6	Reliability.....	11
6.1	General.....	11

Product Data Sheet

9695480300
VWS0148PULCS
6314 N/2HHP

1 General

Fan type	Fan	
Rotating direction looking at rotor	Counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	

2 Mechanics
2.1 General


Depth	51,0 mm	
Diameter	172,0 mm	
Mass	0,685 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 600 Ncm Remaining corners: 600 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 365 mm	
Tolerance	+/- 10,0 mm	
Tube length	S = 10 mm	
Tolerance	+/- 5,0 mm	

Product Data Sheet

9695480300
VWS0148PULCS
6314 N/2HHP

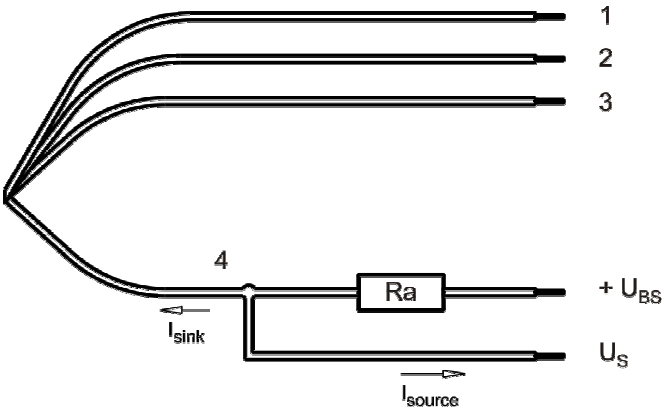

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 22	1,7 mm
2	blue	- GND	AWG 22	1,7 mm
3	violet	PWM	AWG 24	1,55 mm
4	white	Tacho	AWG 24	1,55 mm

The auxilliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

Lead wire 1 - 2: AWG22 (Insulation diameter 1,70 mm)
Lead wire 3 - 4: AWG24 (Insulation diameter 1,55 mm)

Product Data Sheet



9695480300
VWS0148PULCS
6314 N/2HHP

3 Operating Data
3.1 Electrical Interface - Input

Control input	PWM
---------------	-----

Features

Input type	Open collector	
PWM - Frequency		1 kHz - 20 kHz typical: 2 kHz

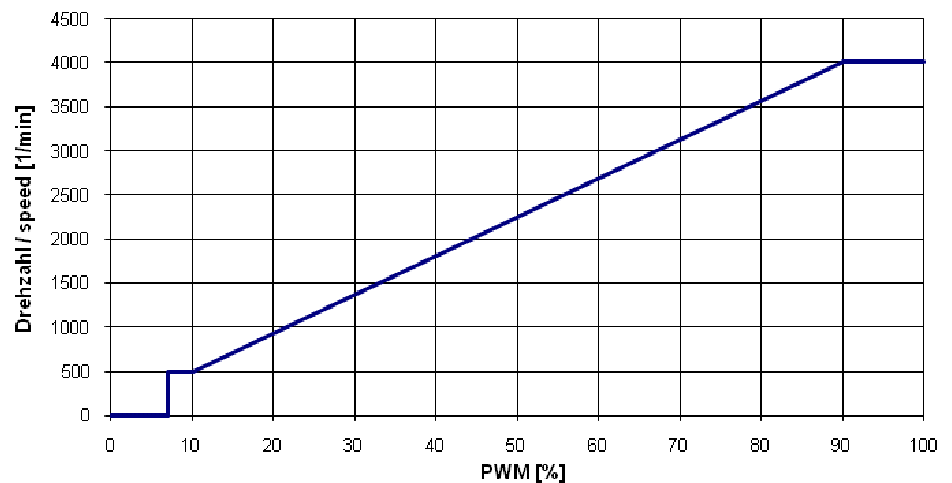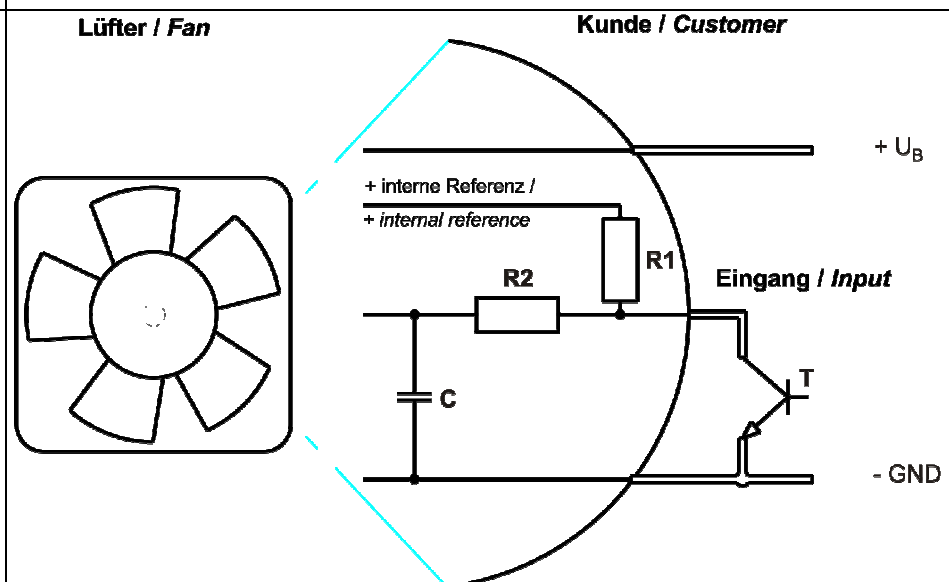Characteristics

Schematics


The shown pull-up resistor to the internal reference voltage (+5V) has 4.7kOhm.

Information to the curve:

0% - <=7% PWM: 0 1/min (Fan off)
 7% PWM: 500 1/min (Start-up, comming from 0% PWM)
 7% - 10 % PWM: 500 1/min (corresp. to min fan speed)

Product Data Sheet
9695480300
 VWS0148PULCS
 6314 N/2HHP

10% - 90% PWM: Linear increasing curve
 90% - 100% PWM: 4.000 1/min (corresp. to max fan speed)

Transistor Requirements:

VCE max. $\geq 12V$
 Isink max $> 5mA$
 VCEsat $< 0,15V$

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)
 I: corresp. to arithm. mean current value

Name	Condition
PWM 0001	PWM: 95 %; f: 2 kHz


>90% PWM; f = 2 kHz or broken lead wire (open control input)

Features	Condition	Symbol	Values		
Voltage range		U	16 V		32,0 V
Nominal voltage		U _N		24,0 V	
Power consumption	$\Delta p = 0$	P	16 W	32 W	29 W
Tolerance	PWM 0010		+/- 10 %	+/- 10 %	+/- 10 %
Current consumption	$\Delta p = 0$	I	1.000 mA	1.300 mA	900 mA
Tolerance	PWM 0010		+/- 10 %	+/- 10 %	+/- 10 %
Speed	$\Delta p = 0$	n	3.000 1/min	4.000 1/min	3.900 1/min
Tolerance	PWM 0010		+/- 10 %	+/- 5 %	+/- 5 %

Product Data Sheet
9695480300
 VWS0148PULCS
 6314 N/2HHP



3.3 Electrical Interface - Output

Tacho type	/2 (open collector)
------------	---------------------

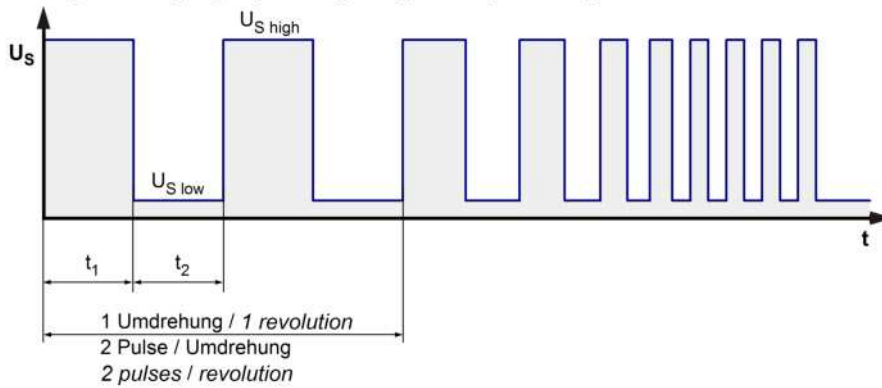Signal-Ausgangsspannung / Signal output voltage


$$R_a = \frac{U_{BS} - U_{s \text{ low}}}{I_{\text{sink}}}$$

Lüfter / Fan Kunde / Customer

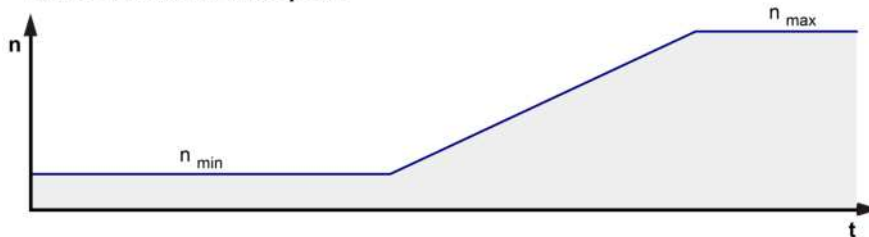
Lüfter-Drehzahl / Fan speed


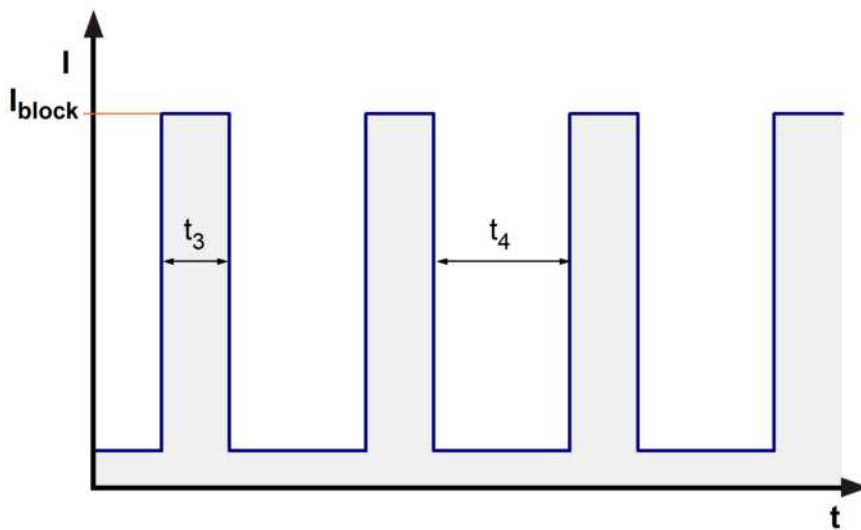
Features	Note	Values
Tacho operating voltage	U_{BS}	$\leq 32 \text{ V}$
Tacho signal Low	$U_{s \text{ low}}$	$I_{\text{sink}}: 2 \text{ mA}$ $\leq 0,4 \text{ V}$
Tacho signal High	$U_{s \text{ high}}$	$I_{\text{source}}: 0 \text{ mA}$ 32 V
Maximum sink current	I_{sink}	$\leq 20 \text{ mA}$
External resistor	External resistor R_a from U_{BS} to U_s required. All voltages measured to GND.	
Tacho frequency	$(2 \times n) / 60$	133 Hz
Tacho isolated from motor	No	
Slew rate		$\Rightarrow 0,5 \text{ V/us}$

n = revolutions per minute (1/min)

Product Data Sheet
9695480300
 VWS0148PULCS
 6314 N/2HHP

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at U_N	$I_F \leq 5 \text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block} approx. 600 mA	
Clock signal at locked rotor	t_3 / t_4 typical: 0,5 s / 10,0 s	



This fan has a startup delay of 2,2 seconds after applying supply voltage.

Internal Fuse: Littelfuse Nano2 Fuse Very Fast-Acting 451/453 Series 4A / 75V

Product Data Sheet
9695480300
 VWS0148PULCS
 6314 N/2HHP

3.5 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.

 Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;


In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions. Power consumption of the fan motor when operating at normal voltage is shown. Depending on the operating conditions of the application, the power input may be higher.

a.) Operation condition:

4.000 1/min at free air flow	PWM 95 %; f: 2 kHz		
------------------------------	--------------------	--	--

Max. free-air flow ($\Delta p = 0 / \dot{V} = \max.$)	540 m ³ /h	
Max. static pressure ($\Delta p = \max. / \dot{V} = 0$)	280 Pa	

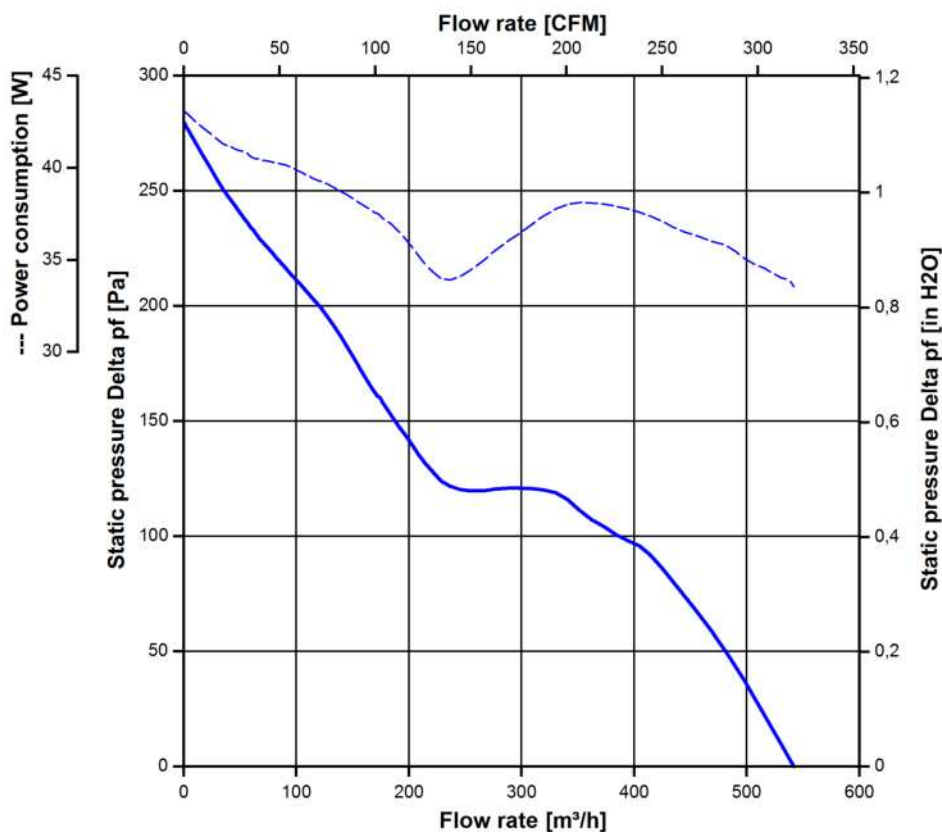

Product Data Sheet
9695480300
 VWS0148PULCS
 6314 N/2HHP

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

4.000 1/min at free air flow	PWM 95 %; f: 2 kHz		
------------------------------	--------------------	--	--

Optimal operating point	380 m ³ /h @ 102 Pa	
Sound power level at the optimal operating point	6,6 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	60 dB(A)	

4 Environment
4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

Please require severity levels and specification parameters from the responsible development departments.

Product Data Sheet
9695480300
 VWS0148PULCS
 6314 N/2HHP

5 Safety
5.1 Electrical Safety



Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	1000 VAC / 1 Min. 1700 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	III	

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans E38324
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Not applicable

6 Reliability
6.1 General

Life expectancy L10 at TU = 40 °C	80.000 h	
Life expectancy L10 at TU max.	40.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	135.000 h	

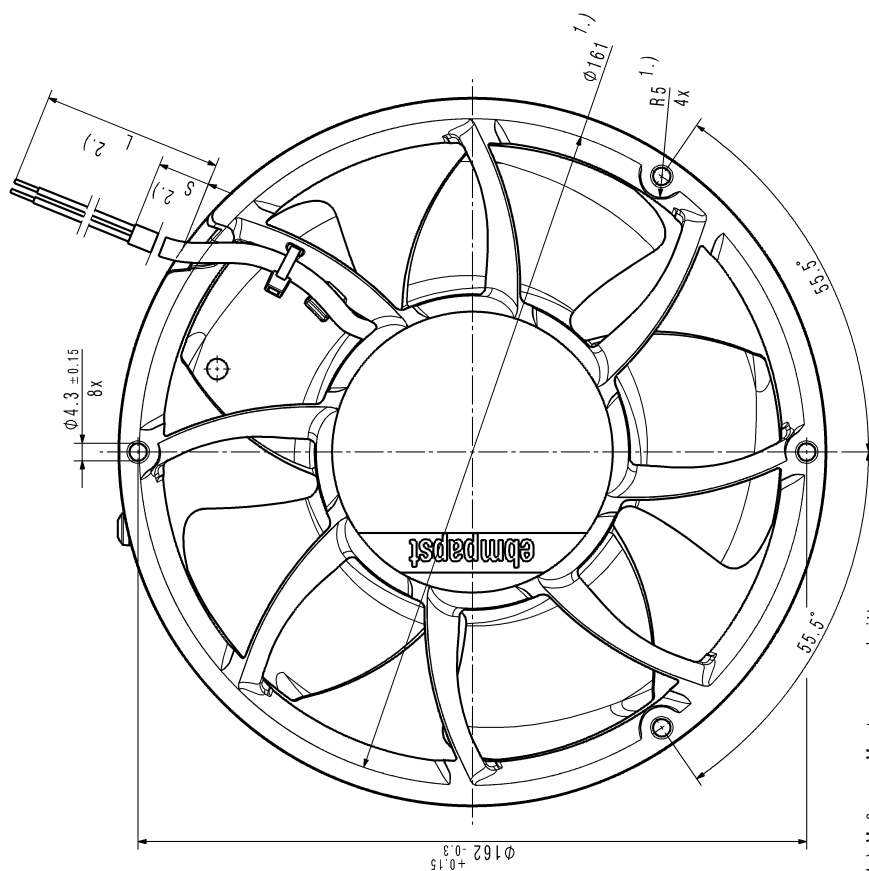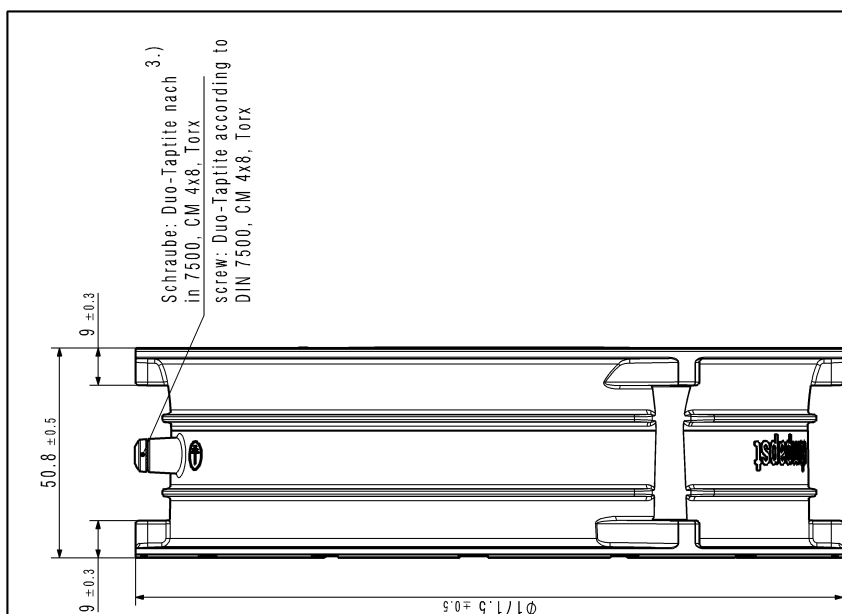

- 1.) Maße aus Montageausschnitt
- 2.) Anzahl und Länge der Litzen/Schlauch siehe Produktspezifikation
- 3.) Erdungsschraube nur wenn in der Lueftergasausstueckliste enthalten

- Axialspiel der Kugellager mit Feder spielfrei gelagert

- 1.) measures of mounting cut out
- 2.) length an number of wires/tube see product specification
- 3.) grounding screw only if contained in the fan housing part list

- ball bearing without clearance by a pre-load spring

[illegible]