

KARTA KATALOGOWA

6318 N/2H3PU

Wentylator osiowy kompaktowy DC


Producent: ebm-papst


Dane znamionowe

Napięcie znamionowe	48 V DC (36...60 V DC)
Prędkość obrotowa	5000 obr/min
Pobór mocy	58 W
Pobór prądu	1200 mA
Wydajność	680 m³/h
Maks. ciśnienie statyczne	450 Pa
Poziom ciśnienia akustycznego	66 dB(A)
Poziom mocy akustycznej	7,3 B
Temperatura otoczenia	-20...+70 °C

Budowa

Wymiary	Ø 172 × 51 mm
Materiał wirnika	tworzywo sztuczne
Obudowa	metal
Kierunek przepływu	wydmuch przez żebra
Łożyskowanie	kulkowe
Podłączenie	przewody
Trwałość L10 (40 °C)	77500 h

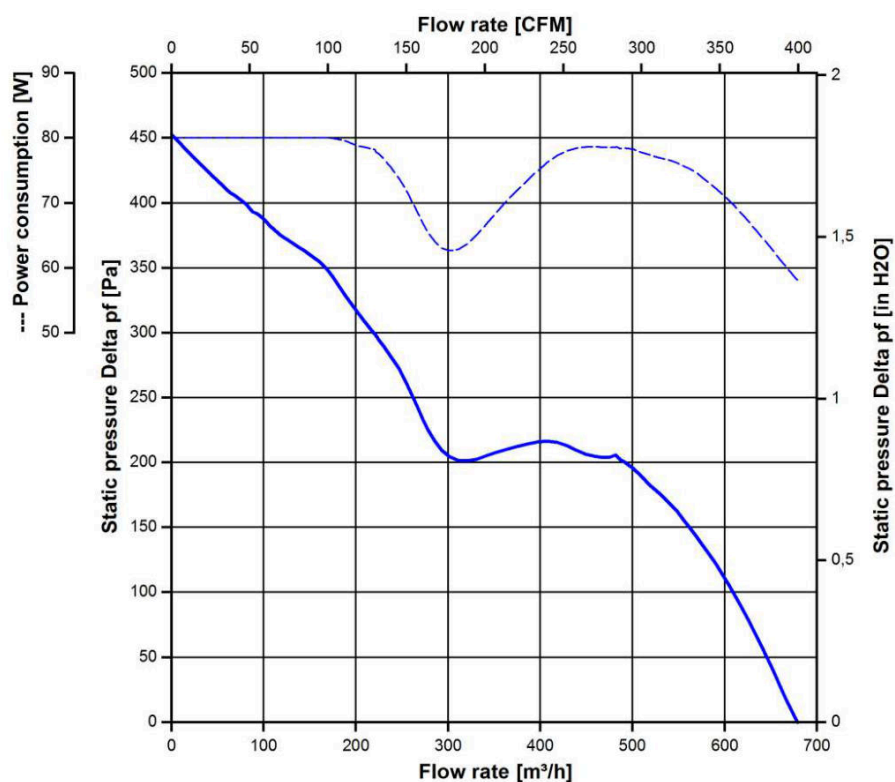Charakterystyka przepływowa


Dane na okładce odczytane z karty produktu ebm-papst (oryginał na kolejnych stronach).
 Producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
 biuro@luftberg.pl · www.luftberg.pl

Product Data Sheet

9695480302
VWEG172PKLSS
6318N/2H3PU

ebmpapst

engineering a better life



Product Data Sheet

9695480302
VWEG172PKLSS
6318N/2H3PU

6318N/2H3PU

INDEX

1	General	3
2	Mechanics	3
2.1	General	3
2.2	Connections	3
3	Operating Data	5
3.1	Electrical Interface - Input	5
3.2	Electrical Operating Data	6
3.3	Electrical Interface - Output	7
3.4	Electrical Features	8
3.5	Aerodynamics	9
3.6	Sound Data	10
4	Environment.....	10
4.1	General	10
4.2	Climatic Requirements.....	11
4.3	EMC	11
5	Safety.....	13
5.1	Electrical Safety	13
5.2	Approval Tests	13
6	Reliability.....	13
6.1	General	13

Product Data Sheet
9695480302
 VWEG172PKLSS
 6318N/2H3PU

1 General


Fan type	Axial	
Rotating direction looking at rotor	Counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position - shaft	Any	

2 Mechanics
2.1 General

Depth	51,0 mm	
Diameter	172,0 mm	
Mass	0,755 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 600 Ncm Remaining corners: 600 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 365 mm	
Tolerance	+/- 10,0 mm	
Tube length	S = 10 mm	
Tolerance	+/- 5,0 mm	

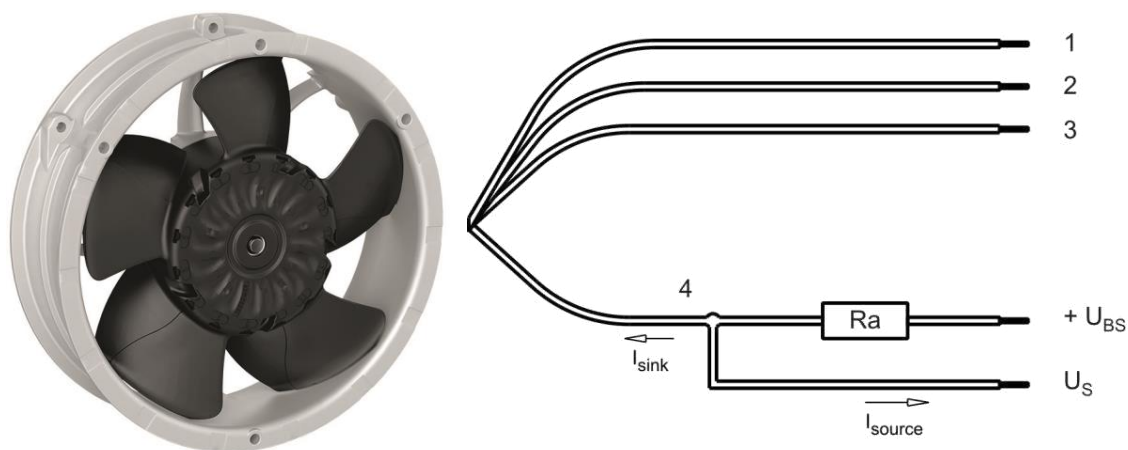

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 22	1,7 mm
2	blue	- GND	AWG 22	1,7 mm
3	violet	PWM	AWG 24	1,55 mm
4	white	Tacho	AWG 24	1,55 mm

Product Data Sheet
9695480302
 VWEG172PKLSS
 6318N/2H3PU

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

Lead wire 1 - 2: AWG22 (Insulation diameter 1,70 mm)
 Lead wire 3 - 4: AWG24 (Insulation diameter 1,55 mm)

Product Data Sheet

9695480302
VWEG172PKLSS
6318N/2H3PU

3 Operating Data


3.1 Electrical Interface - Input

Control input	PWM
---------------	-----


Features

Input type	Open collector	
PWM - Frequency		1 kHz - 20 kHz typical: 2 kHz

Characteristics

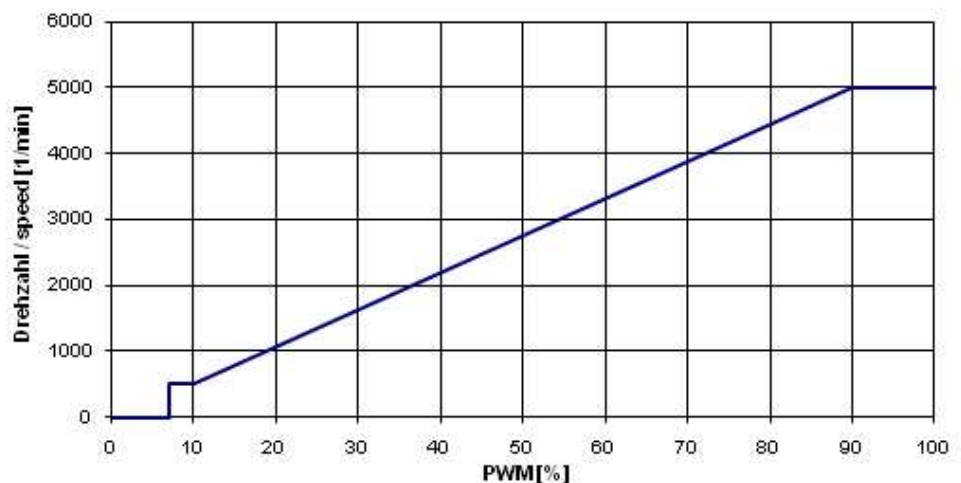

Schematics

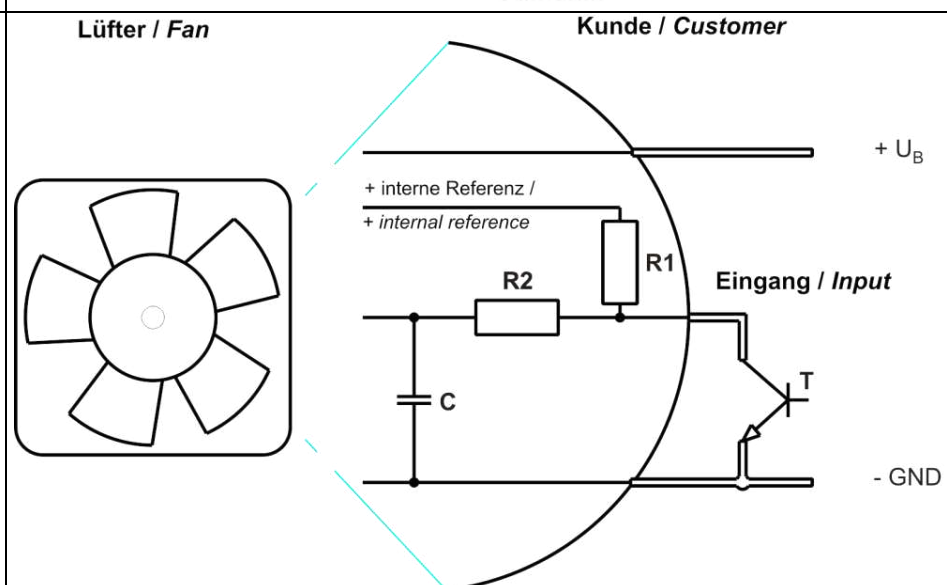

The shown pull-up resistor to the internal reference voltage (+5V) has 4.7kOhm.

Information to the curve:

0% - <=7% PWM: 0 1/min (Fan off)
7% PWM: 500 1/min (Start-up, coming from 0% PWM)
7% - 10 % PWM: 500 1/min (corresp. to min fan speed)

Product Data Sheet
9695480302
 VWEG172PKLSS
 6318N/2H3PU

 10% - 90% PWM: Linear increasing curve
 90% - 100% PWM: 5.000 1/min (corresp. to max fan speed)

Transistor Requirements:

 VCE max. $\geq$ 12V
 Isink max $>$ 5mA
 VCEsat $<$ 0,15V

3.2 Electrical Operating Data

 Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C $\pm$ 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

 $\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)
 I: corresp. to arithm. mean current value

Name	Condition
PWM 0001	PWM: 95 %; f: 2 kHz


>90% PWM; f = 2 kHz or broken lead wire (open control input)

Features	Condition	Symbol	Values		
Voltage range		U	36 V		60 V
Nominal voltage		U _N		48 V	
Power consumption	$\Delta p = 0$	P	37 W	58 W	60 W
Tolerance	PWM 0010		$\pm 10 \%$	$\pm 10 \%$	$\pm 10 \%$
Current consumption	$\Delta p = 0$	I	1.030 mA	1.200 mA	1.000 mA
Tolerance	PWM 0010		$\pm 10 \%$	$\pm 10 \%$	$\pm 10 \%$
Speed	$\Delta p = 0$	n	4.300 1/min	5.000 1/min	5.000 1/min
Tolerance	PWM 0010		$\pm 10 \%$	$\pm 5 \%$	$\pm 5 \%$

Product Data Sheet
9695480302
 VWEG172PKLSS
 6318N/2H3PU



3.3 Electrical Interface - Output

Tacho type	/2 (open collector)
------------	---------------------

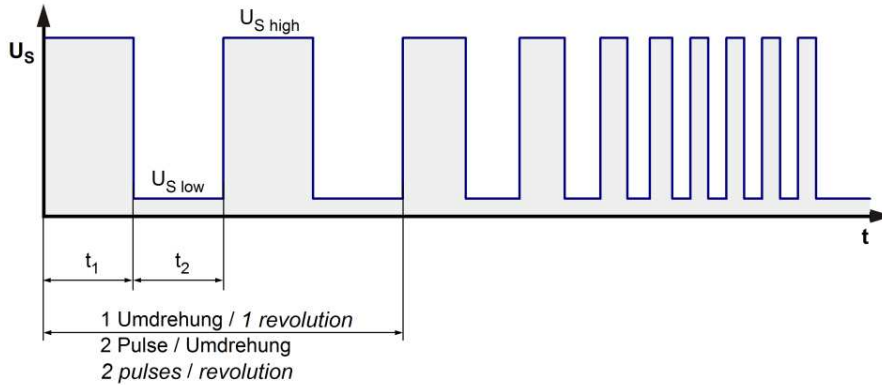Signal-Ausgangsspannung / Signal output voltage


$$R_a = \frac{U_{BS} - U_{S \text{ low}}}{I_{\text{sink}}}$$

Lüfter / Fan Kunde / Customer

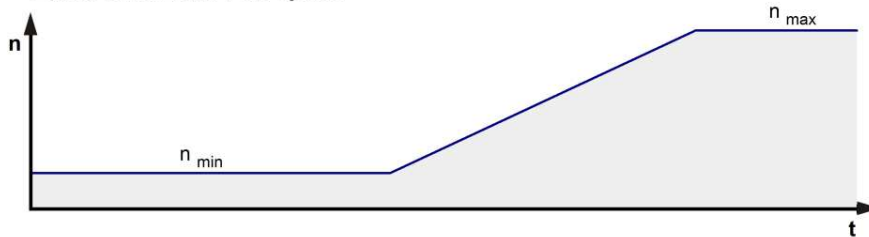
Lüfter-Drehzahl / Fan speed


Features	Note	Values
Tacho operating voltage	U_{BS}	$\leq 60 \text{ V}$
Tacho signal Low	$U_{S \text{ low}}$	$I_{\text{sink}}: 2 \text{ mA}$ $\leq 0,4 \text{ V}$
Tacho signal High	$U_{S \text{ high}}$	$I_{\text{source}}: 0 \text{ mA}$ 60 V
Maximum sink current	I_{sink}	$\leq 20 \text{ mA}$
External resistor	External resistor R_a from U_{BS} to U_S required. All voltages measured to GND.	
Tacho frequency	$(2 \times n) / 60$	167 Hz
Tacho isolated from motor	No	
Slew rate		$\Rightarrow 0,5 \text{ V/us}$


n = revolutions per minute (1/min)

Product Data Sheet

9695480302
VWEG172PKLSS
6318N/2H3PU

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at U_N	$I_F \leq 5 \text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at U_N	I_{block} approx. 1.300 mA	
Clock signal at locked rotor	t_3 / t_4 typical: 0,5 s / 10,0 s	

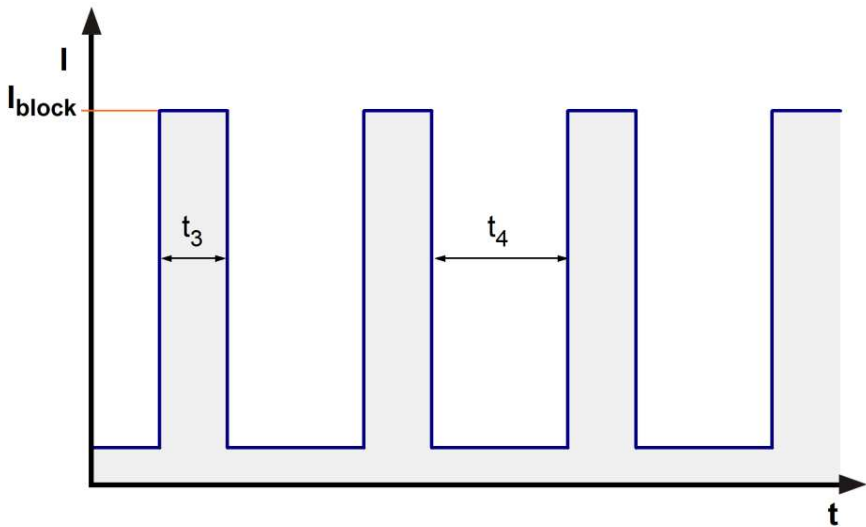

This fan has a startup delay of 2,2 seconds after applying supply voltage.

Internal Fuse: Littelfuse Nano2 Fuse Very Fast-Acting 451/453 Series 4A / 75V

Product Data Sheet

9695480302
VWEG172PKLSS
6318N/2H3PU

3.5 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.

Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;


In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions. Power consumption of the fan motor when operating at normal voltage is shown. Depending on the operating conditions of the application, the power input may be higher.

a.) Operation condition:

5.000 1/min at free air flow	PWM 95 %; f: 2 kHz		
------------------------------	--------------------	--	--

Max. free-air flow ($\Delta p = 0$ / $\dot{V} = \max.$)	680 m ³ /h	
Max. static pressure ($\Delta p = \max.$ / $\dot{V} = 0$)	450 Pa	

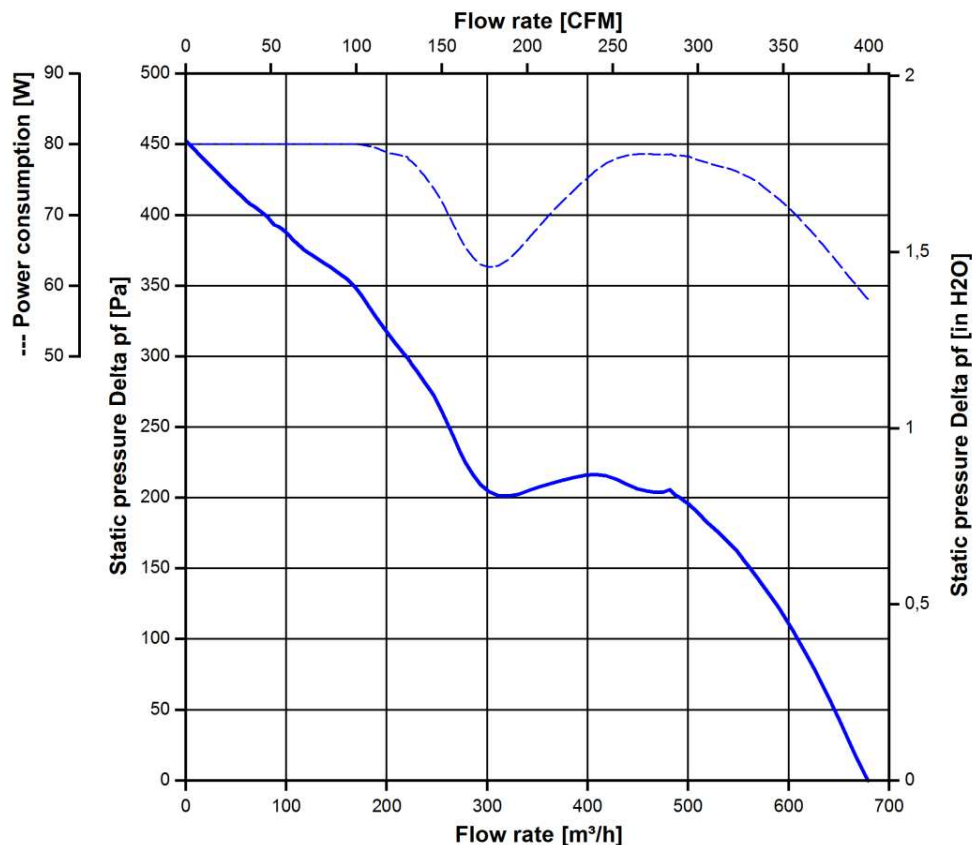

Product Data Sheet
9695480302
 VWEG172PKLSS
 6318N/2H3PU

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
 Sound power level: According to DIN 45635 Part 38 (ISO 10302)
 Measured in a semianechoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

5.000 1/min at free air flow	PWM 95 %; f: 2 kHz		
------------------------------	--------------------	--	--

Optimal operating point	490 m ³ /h @ 200 Pa	
Sound power level at the optimal operating point	7,3 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	66 dB(A)	

4 Environment
4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	70 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

Product Data Sheet
9695480302
VWEG172PKLSS
6318N/2H3PU

4.2 Climatic Requirements

IP-protection type (certified)	IP 68 (for fan only, not for connector if applicable) **)	
Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days	
Salt fog requirements	salt fog, cyclic, in operation; according to DIN EN 60068-2-52, 3 cycle	

Permitted application area:

The product is for the use in open and unsheltered areas. Direct exposure to water as well as saline ambient conditions are allowed provided that this does not prevent the normal operation.

Pollution degree 3 (according DIN EN 60664-1)

It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

**) The specification of the IP protection refers to the conditions mentioned in certification of the fan. The above mentioned short description of the protection scope is not final. For detailed information of the respective protection scope and definitions, see certification as well as DIN EN 60529 (protection by housings) and ISO 20653 (for vehicles) with the letter K.

Short description of the IP-protection type:

Solid particle Protection: Dust tight.

Protection against deliberate contact: Protected against contact to hazardous parts with a wire.

Protection against water: The fan test according to IP68 (Based on IEC 60529), is conducted in non-operating mode. The fan is tested by a complete immersion in water for a period of 2h at a water-level of 1,2m. Electrical connections are not immersed since they are customer specific.

Please require severity levels and specification parameters from the responsible development departments.

4.3 EMC

Kind	Radiated Emission; 30 MHz - 1000 MHz
According	DIN EN 55032:2016-02
Check accuracy / Limit	Class B
Result	Below limit Class B

Kind	Electrostatic Discharge Immunity Test
According	DIN EN 61000-4-2:2001-12
Check accuracy / Limit	Contact Discharge +/- 4 kV; Air Discharge +/- 8 kV
Result	A: The monitored function operates as designed during and after exposure to a disturbance.

Kind	Electromagnetic Field Immunity Test
According	DIN EN 61000-4-3:2006-12
Check accuracy / Limit	10 V/m; 80 - 1000 MHz; AM; m = 0,8; f = 1 kHz; 1%; t = 3 s
Result	A: The monitored function operates as designed during and after exposure to a disturbance.

Product Data Sheet

9695480302
 VWEG172PKLSS
 6318N/2H3PU

Kind	Electrical Fast Transient / Burst Immunity Test
According	DIN EN 61000-4-4:2005-07
Check accuracy / Limit	+/- 2 kV on Power Lines; Coupling: POS, NEG, {PE}, ALL, 5 kHz and 100 kHz; 1 min
Result	A: The monitored function operates as designed during and after exposure to a disturbance.

Kind	Immunity to Conducted Disturbances, Induced by RF-Fields
According	DIN EN 61000-4-6:2001-12
Check accuracy / Limit	10 Vrms; 150 kHz - 80 MHz; AM; m = 0,8; f = 1 kHz; 1%; t = 3 s
Result	A: The monitored function operates as designed during and after exposure to a disturbance.

Product Data Sheet

9695480302
VWEG172PKLSS
6318N/2H3PU

5 Safety
5.1 Electrical Safety

Dielectric strength DIN EN 62368 and DIN EN 60335 A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	1000 VAC / 1 Min. 1700 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	I	

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans E38324
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 62368 - Audio/video, information and communication technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

6 Reliability
6.1 General

Life expectancy L10 at TU = 40 °C	77.500 h	
Life expectancy L10 at TU max.	40.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	130.000 h	

