

KARTA KATALOGOWA

8300100040

Moduł promieniowy EC RadiPac, łopatki zakrzywione do tyłu, jednostronnie ssący (typ VBS0355CTPMS)

Producent: ebm-papst




Zdjęcie poglądowe

Dane znamionowe		Budowa	
Napięcie znamionowe	3~ 400 V (380...480 V)	Średnica wirnika	355 mm
Częstotliwość	50/60 Hz	Materiał wirnika	tworzywo PP
Prędkość obrotowa	3100 obr/min	Liczba łopatek	5
Pobór mocy	1500 W	Stopień ochrony	IP55
Pobór prądu	2,3 A	Klasa izolacji	F
Maks. wydajność	6650 m³/h	Masa	6,66 kg
Maks. ciśnienie statyczne	1330 Pa		
Temperatura otoczenia	-40...+40 °C		
Dane ErP (UE 327/2011)			
Sprawność całkowita	72,9 %		
Przepływ w pkt. optymalnym	4205 m³/h		
Przyrost ciśnienia	873 Pa		
Regulacja obrotów	tak (0-10 V / PWM / MODBUS)		

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

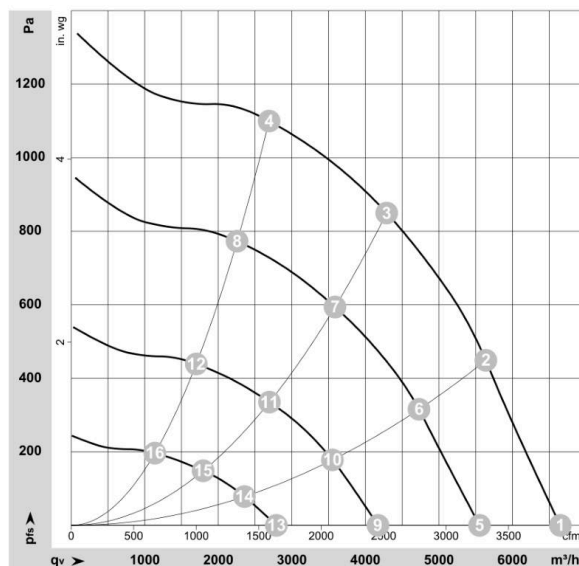

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-213439-1
Date: 2021-04-27
Nozzle: 8217101928

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).

Wartości znamionowe dla punktu maksymalnego obciążenia; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

8300100040
VBS0355CTPMS

EC centrifugal fan - RadiPac

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100040	
Motor	E08423-65	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	3100
Power consumption	W	1500
Current draw	A	2.3
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual		Req. 2015	
01 Overall efficiency η_{es}	%	72.9		53.3	
02 Measurement category		A			
03 Efficiency category		Static			
04 Efficiency grade N		81.6	62		
05 Variable speed drive		Yes			
09 Power consumption P_{ed}	kW			1.49	
09 Air flow q_v	m³/h			4205	
09 Pressure increase p_{fs}	Pa			873	
10 Speed (rpm) n	min ⁻¹			3095	
11 Specific ratio*				1.01	

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-213439

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100040
VBS0355CTPMS

EC centrifugal fan - RadiPac

backward-curved, single-intake

Technical description

Weight	6.66 kg
Size	355 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - External 24 V input (parameter setting) - Alarm relay - Integrated PID controller - MODBUS V5.1 - Motor current limitation - PFC, passive - RS-485 MODBUS-RTU - Soft start - EEPROM write cycles: 100,000 maximum - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal switch auto reset, internally connected
With cable	Lateral

8300100040
VBS0355CTPMS

EC centrifugal fan - RadiPac
backward-curved, single-intake

Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; UKCA; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1


8300100040

VBS0355CTPMS

EC centrifugal fan - RadiPac

backward-curved, single-intake

Product drawing

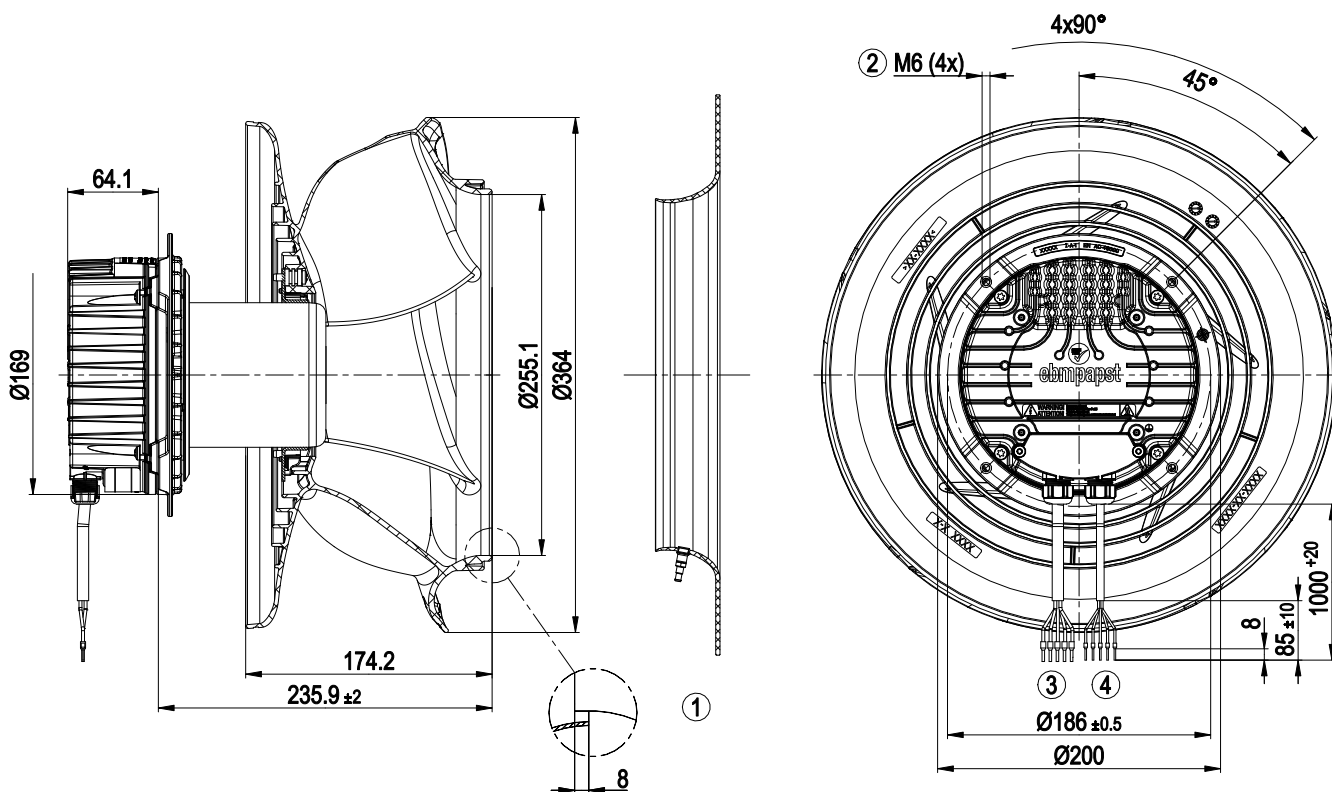


1	Accessory part: Inlet ring 8217102240 with pressure tap (k-factor: 145) (not included in scope of delivery)
2	Max. clearance for screw 16 mm
3	Cable PVC AWG18 6x wire-end ferrule
4	Cable PVC AWG22 5x wire-end ferrule

8300100040
VBS0355CTPMS

EC centrifugal fan - RadiPac

backward-curved, single-intake

Accessory part

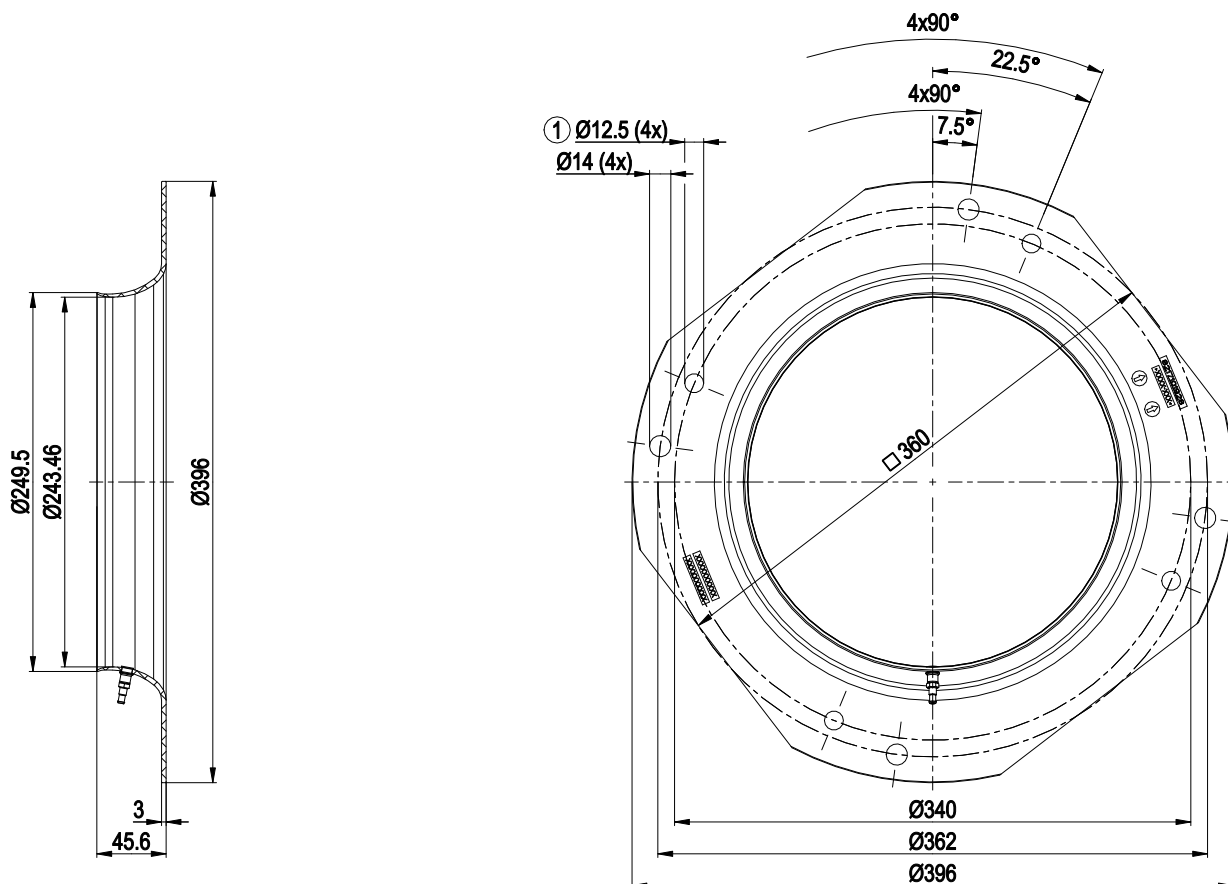

- | | |
|---|--|
| 1 | Fastening holes for FlowGrid 00400-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required |
| | Inlet ring 8217102240 with pressure tap (k-factor: 145) |


8300100040

VBS0355CTPMS

EC centrifugal fan - RadiPac

backward-curved, single-intake

Connection diagram

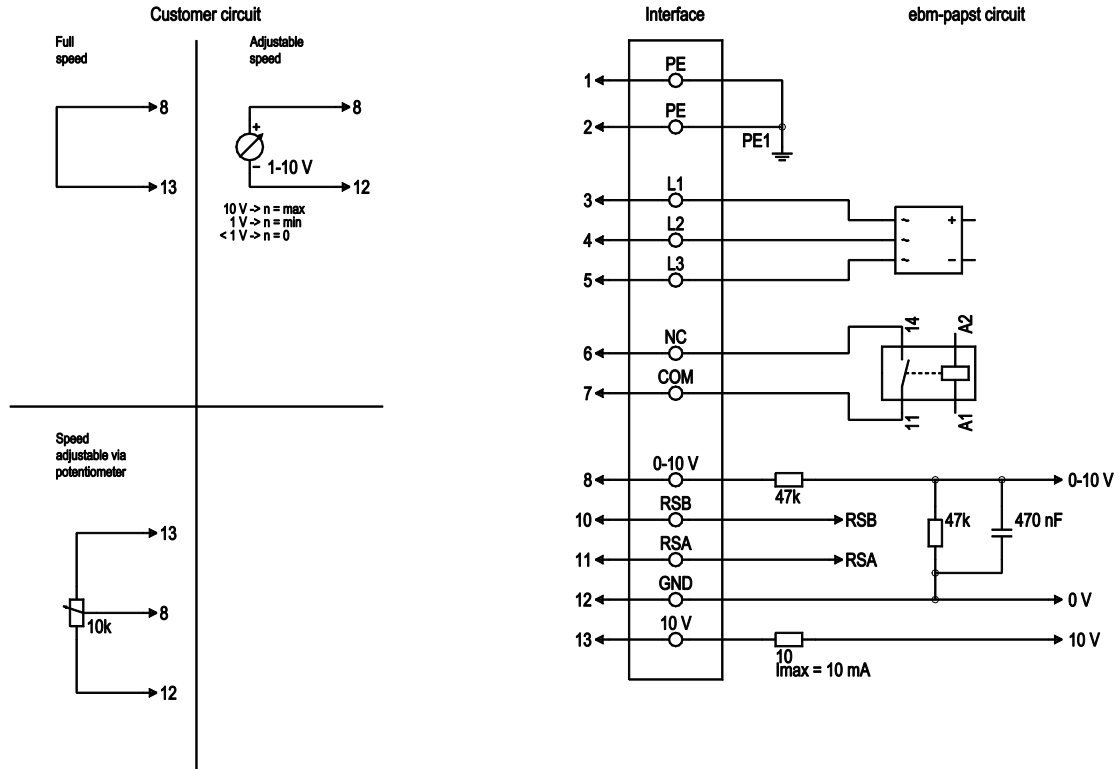


No.	Conn.	Designation	Color	Function/assignment
1	1, 2	PE	green/yellow	Protective earth
1	3	L1	black	Power supply
1	4	L2	black	Power supply
1	5	L3	black	Power supply
1	6	NC	white 1	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side
1	7	COM	white 2	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side
2	8	0-10V	yellow	Analog input (set value), 0-10 V, Ri = 100 kΩ, adjustable curve, SELV
2	10	RSB	brown	RS485 interface for MODBUS, RSB; SELV
2	11	RSA	white	RS485 interface for MODBUS, RSA; SELV
2	12	GND	blue	Reference ground for control interface, SELV
2	13	+10V	red	Fixed voltage output 10 VDC, +10 V ±3%, max. 10 mA, short-circuit-proof power supply for external devices (e.g. pot), SELV fixed voltage input 24 VDC for setting parameters via MODBUS without line voltage supply

8300100040
VBS0355CTPMS

EC centrifugal fan - RadiPac

backward-curved, single-intake

Curves: Air performance 50 Hz

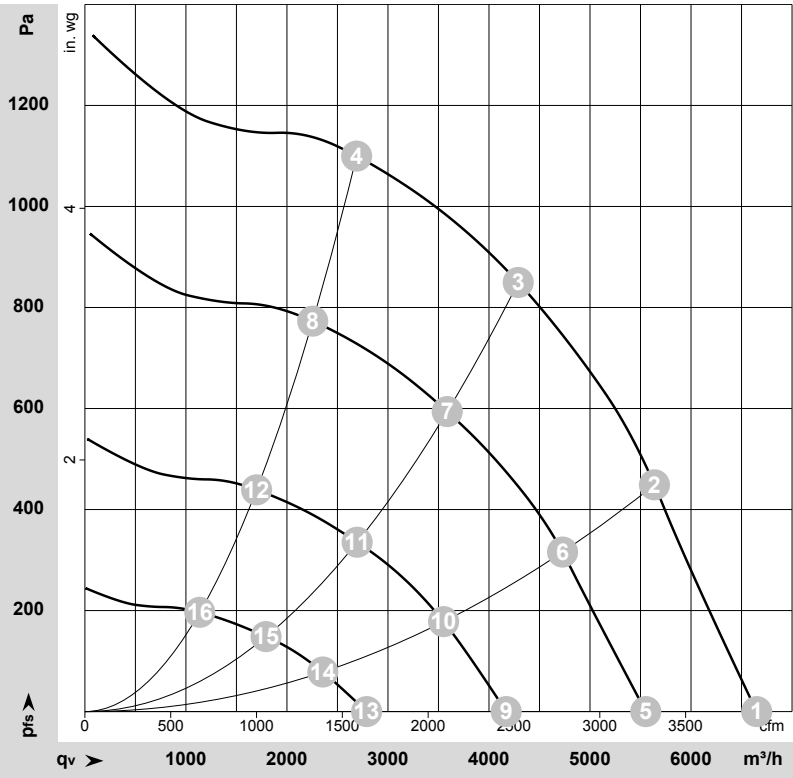

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-213439-1
Date: 2021-04-27
Nozzle: 8217101928

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	3~	400	50	3100	950	1.47	82	90	93	6650	0	3915	0.00
2	3~	400	50	3100	1362	2.08	75	83	86	5640	450	3320	1.81
3	3~	400	50	3100	1500	2.30	73	79	83	4290	850	2525	3.41
4	3~	400	50	3100	1401	2.14	76	82	86	2690	1100	1585	4.42
5	3~	400	50	2595	578	0.93	77	86	88	5550	0	3270	0.00
6	3~	400	50	2595	810	1.26	70	78	82	4730	317	2785	1.27
7	3~	400	50	2590	888	1.38	69	75	79	3585	595	2110	2.39
8	3~	400	50	2595	830	1.30	72	77	81	2255	774	1325	3.11
9	3~	400	50	1950	268	0.50	69	78	81	4170	0	2455	0.00
10	3~	400	50	1950	364	0.63	63	71	75	3550	178	2090	0.71
11	3~	400	50	1950	399	0.67	63	69	73	2695	336	1585	1.35
12	3~	400	50	1950	375	0.64	64	70	74	1700	440	1000	1.77
13	3~	400	50	1310	100	0.28	60	67	71	2790	0	1640	0.00
14	3~	400	50	1310	127	0.32	55	62	66	2355	78	1385	0.31
15	3~	400	50	1310	137	0.33	53	60	64	1795	149	1055	0.60
16	3~	400	50	1310	130	0.32	54	60	64	1135	197	670	0.79

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase