

AC axial fan

LUFTBERG wentylatory
www.luftberg.pl


S series



- **Design:** Without guard grille and wall ring
- **Impeller material:** Sheet steel, coated in black
- **Motor material:** Rotor: Coated in black


Nominal data		Voltage	Frequency	Air flow	Speed	Power consumption	Current draw	Sound pressure level	Operative range 50Hz	Ambient temperature 50Hz	Weight
Type	Motor	3~ VAC	Hz	m³/h	1/min	W	A	dB(A)	Pa	°C	kg
A2D200AI1801	M2D068BC	230/400	50	890	2600	68	0.17	65	0 .. 140	-25 .. 45	1.6
Subject to modification		Current draw at 230 VAC higher by a factor of 1.73									

Characteristic: Pressure over air flow at 50Hz	n [1/min]	P ₁ [W]	I [A]	LpA [dBA]	ntL [%]
--	--------------	-----------------------	----------	--------------	------------

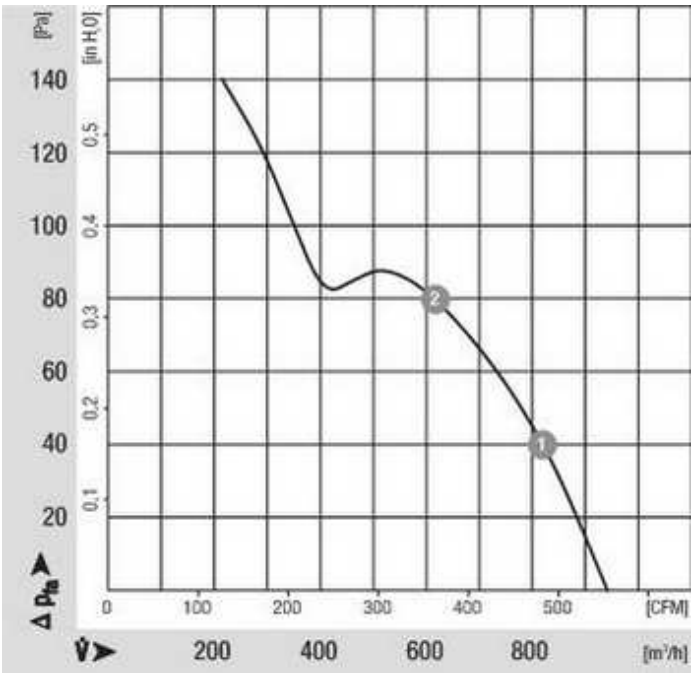


1	2540	70	0,17	--	--
2	2470	74	0,17	--	--

Specific drawing

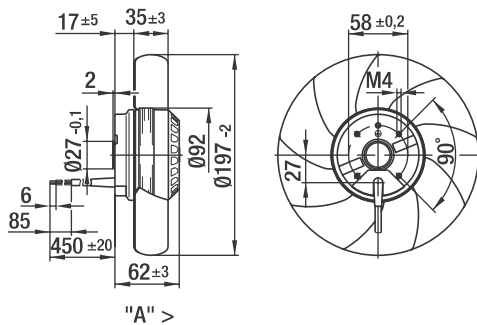


Connection illustration

Delta (3~ 230 VAC)

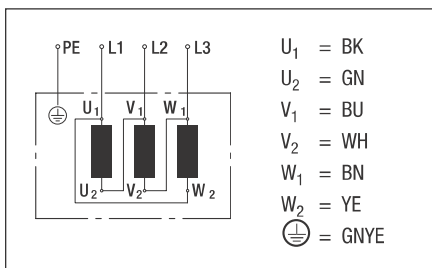

Star (3~ 400 VAC)

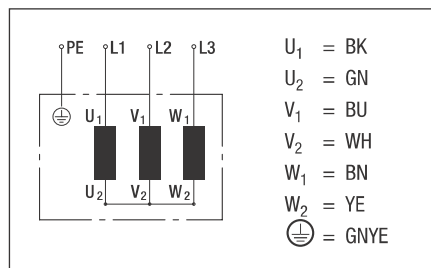

Technical description

- **Design:** Without guard grille and wall ring
- **Motor material:** Rotor: Coated in black
- **Direction of rotation:** Counter-clockwise, seen on rotor
- **Number of impeller blades:** 9
- **Cable layout:** On the side
- **Guideline:** EN 60335-1
- **Insulation class:** "B"
- **System of protection:** IP 44
- **Impeller material:** Sheet steel, coated in black
- **Bearings:** Maintenance-free ball bearings
- **Direction of flow:** "A"
- **Electrical connection:** Brass lead tips
- **Screw depth:** Max. 5 mm
- **Operating mode:** Continuous operation (S1)
- **Protection class:** I
- **Motor protection:** Without thermal protection

Contact

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2
D-74673 Mulfingen
Phone +49 (0) 79 38 / 81-0
Fax +49 (0) 79 38 / 81-110
info1@de.ebmpapst.com
www.ebmpapst.com