

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen


Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	A2D250-AI14-09		
Motor	M2D068-CC		
Phase		3~	3~
Nominal voltage	VAC	400	460
Wiring		Y	Y
Frequency	Hz	50	60
Method of obtaining data		fa	fa
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	2460	2750
Power consumption	W	110	160
Current draw	A	0.19	0.23
Max. back pressure	Pa	100	120
Max. back pressure	in. wg	0.4	0.48
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	80	60


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Product drawing

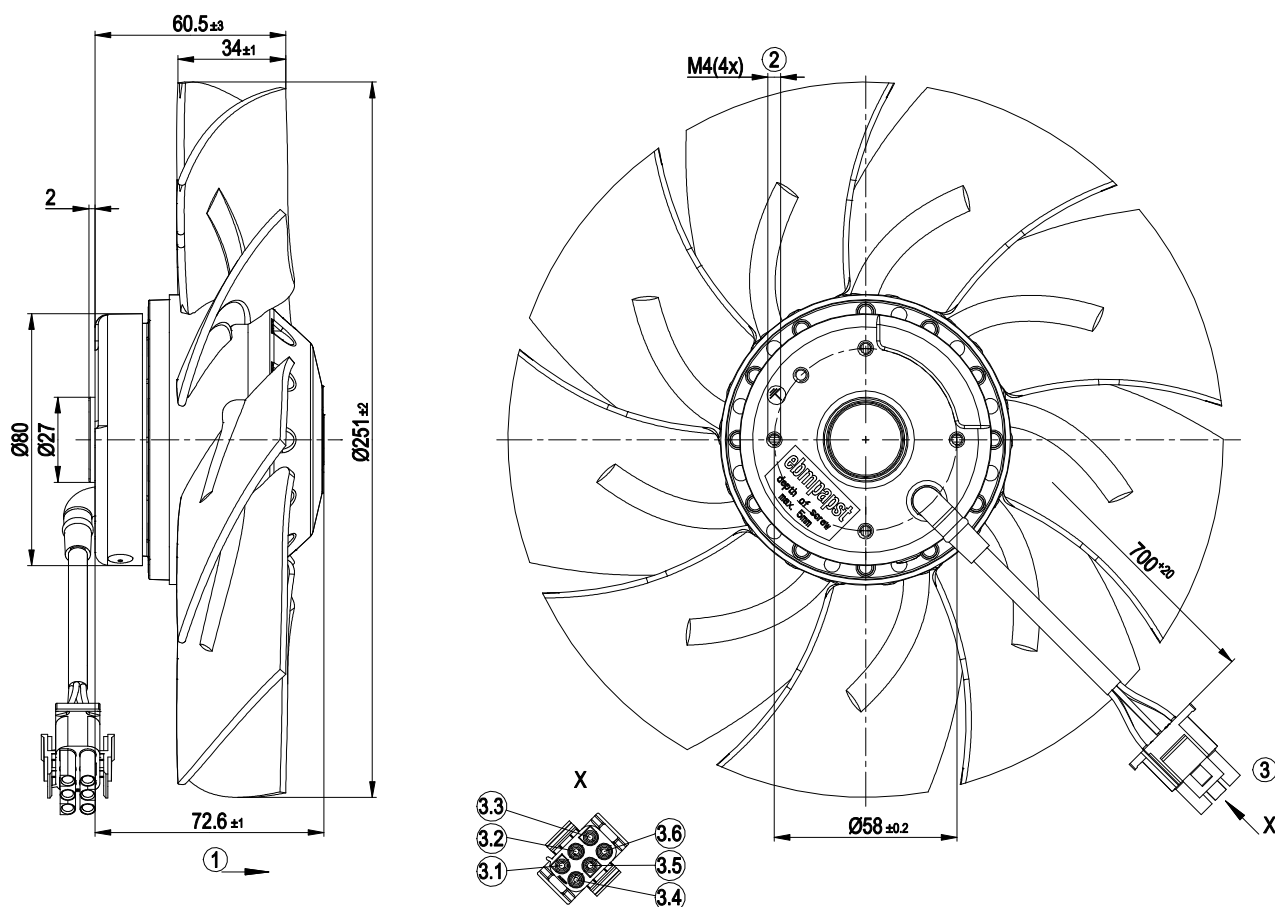

1	Direction of air flow "A"
2	Max. clearance for screw 5 mm
3	Cable PFA AWG20 (green/yellow AWG18), 6-pole connector housing tyco 1-1644055-3, 6x socket tyco 926884-1
3.1	L1=U1 (black)
3.2	L2=V1 (blue)
3.3	L3=W1 (brown)
3.4	PE (green/yellow)
3.5	TOP (gray)
3.6	TOP (gray)

Curves: Air performance 50 Hz Y

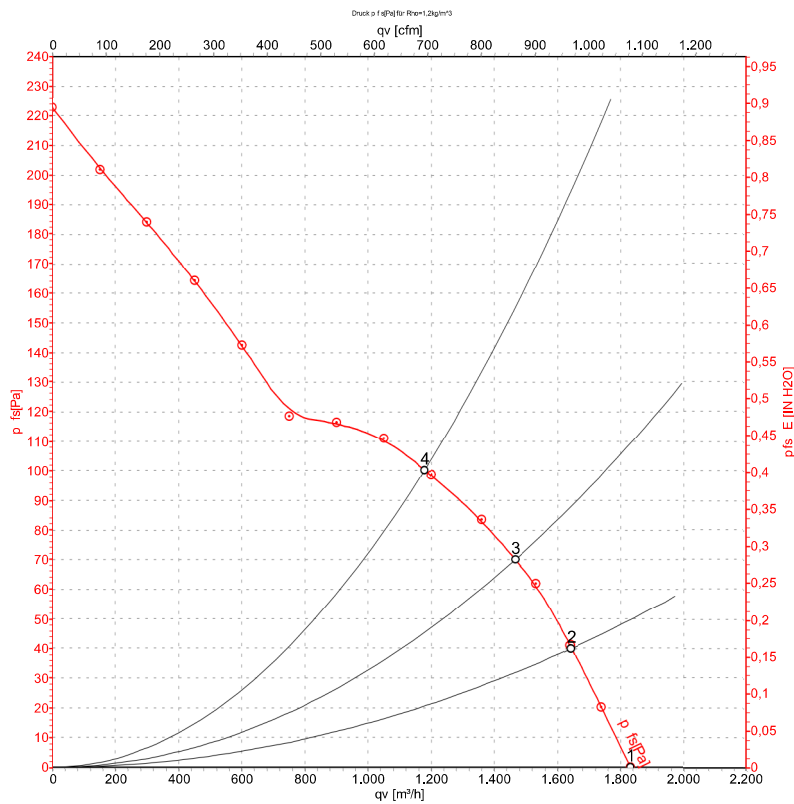

Measurement: LU-76487-1


Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _V	P _{fs}	q _V	P _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	Y	400	50	2460	110	0.19	1830	0	1080	0.00
2	Y	400	50	2395	113	0.20	1645	40	970	0.16
3	Y	400	50	2350	120	0.21	1465	70	865	0.28
4	Y	400	50	2290	126	0.22	1180	100	695	0.40

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{ts} = Pressure increase

Curves: Air performance 60 Hz Y

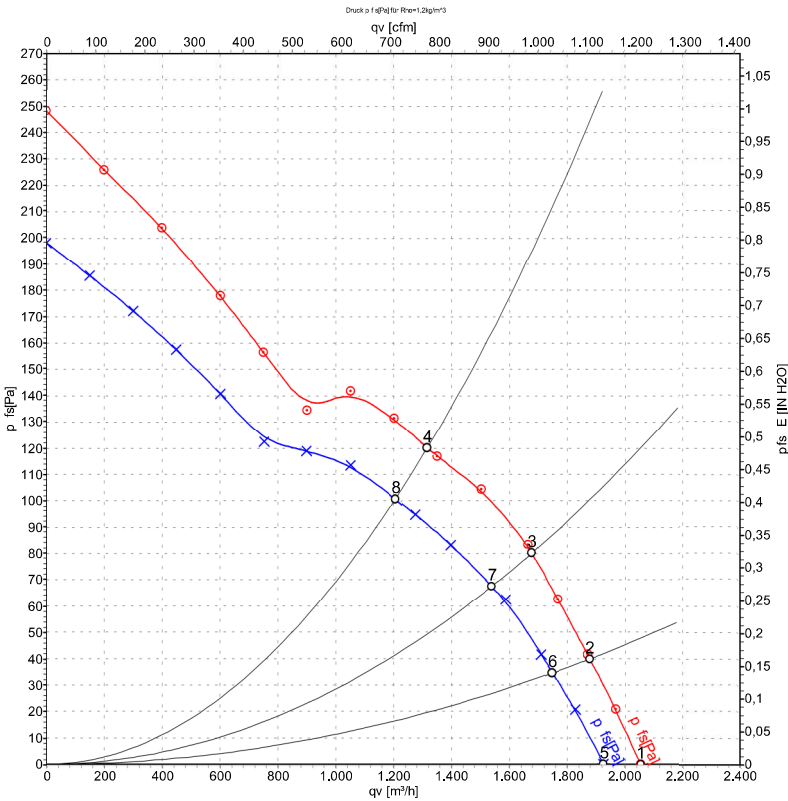

Measurement: LU-76489-1
Measurement: LU-76488-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P_e	I	q_v	P_{fs}	q_v	P_{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	Y	460	60	2750	160	0.23	2055	0	1210	0.00
2	Y	460	60	2690	165	0.24	1875	40	1105	0.16
3	Y	460	60	2600	177	0.25	1675	80	985	0.32
4	Y	460	60	2515	187	0.26	1315	120	775	0.48
5	Y	400	60	2580	140	0.22	1925	0	1135	0.00
6	Y	400	60	2500	145	0.23	1750	35	1030	0.14
7	Y	400	60	2405	154	0.24	1540	68	905	0.27
8	Y	400	60	2310	161	0.26	1205	100	710	0.40

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase