


KARTA KATALOGOWA

A2E250-AP06-05

Wentylator osiowy AC, łopatki sierpowe (seria S), jednostronnie ssący


Producent: ebm-papst

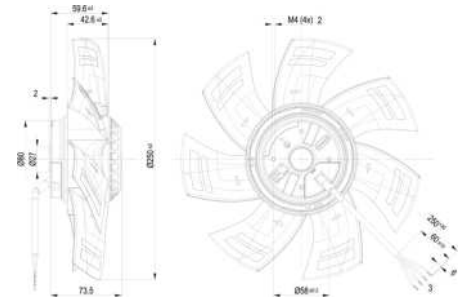

Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Wielkość	250 mm
Częstotliwość	50 / 60 / 60 Hz	Silnik	M2E068-CF
Prędkość obrotowa	2350 / 2325 / 2450 obr/min	Materiał wirnika	blacha stalowa natryskiwana tworzywem PP
Pobór mocy	125 / 160 / 166 W	Liczba łopatek	7
Pobór prądu	0,55 / 0,70 / 0,73 A	Kierunek obrotów	w lewo, patrząc na wirnik
Prąd rozruchowy	0,9 / 0,85 / 0,85 A	Stopień ochrony	IP44
Maks. przeciwciśnienie	125 / 120 / 120 Pa	Klasa izolacji	F
Kondensator	3 µF / 400 V	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Temperatura otoczenia	min. -25 °C; maks. 55 / 50 / 50 °C	Łożyskowanie	kulkowe
		Masa	1,67 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

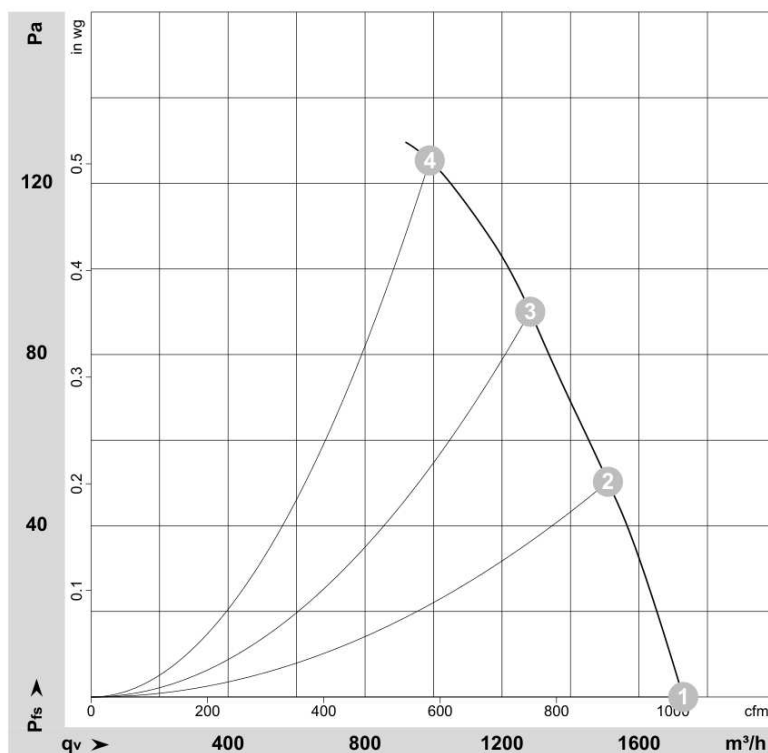

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-162235-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).

Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199

biuro@luftberg.pl · www.luftberg.pl

A2E250-AP06-05

AC axial fan

sickle-shaped blades (S series), single-intake

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	A2E250-AP06-05			
Motor	M2E068-CF			
Phase		1~	1~	1~
Nominal voltage	VAC	230	230	230
Frequency	Hz	50	60	60
Method of obtaining data		ml	ml	ml
Valid for approval/standard		CE	CE	UL 2111
Speed (rpm)	min ⁻¹	2350	2325	2450
Power consumption	W	125	160	166
Current draw	A	0.55	0.70	0.73
Capacitor	µF	3	3	3
Capacitor voltage	VDB	400	400	400
Capacitor standard		S0 (CE)	S0 (CE)	S0 (CE)
Max. back pressure	Pa	125	120	120
Max. back pressure	in. wg	0.5	0.48	0.48
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	55	50	50
Starting current	A	0.9	0.85	0.85

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



A2E250-AP06-05

AC axial fan

sickle-shaped blades (S series), single-intake

Technical description


Weight	1.67 kg
Size	250 mm
Motor size	68
Rotor surface	Painted black
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Number of blades	7
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	On stator side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 77; UL 1004-3

A2E250-AP06-05

AC axial fan


sickle-shaped blades (S series), single-intake

Product drawing

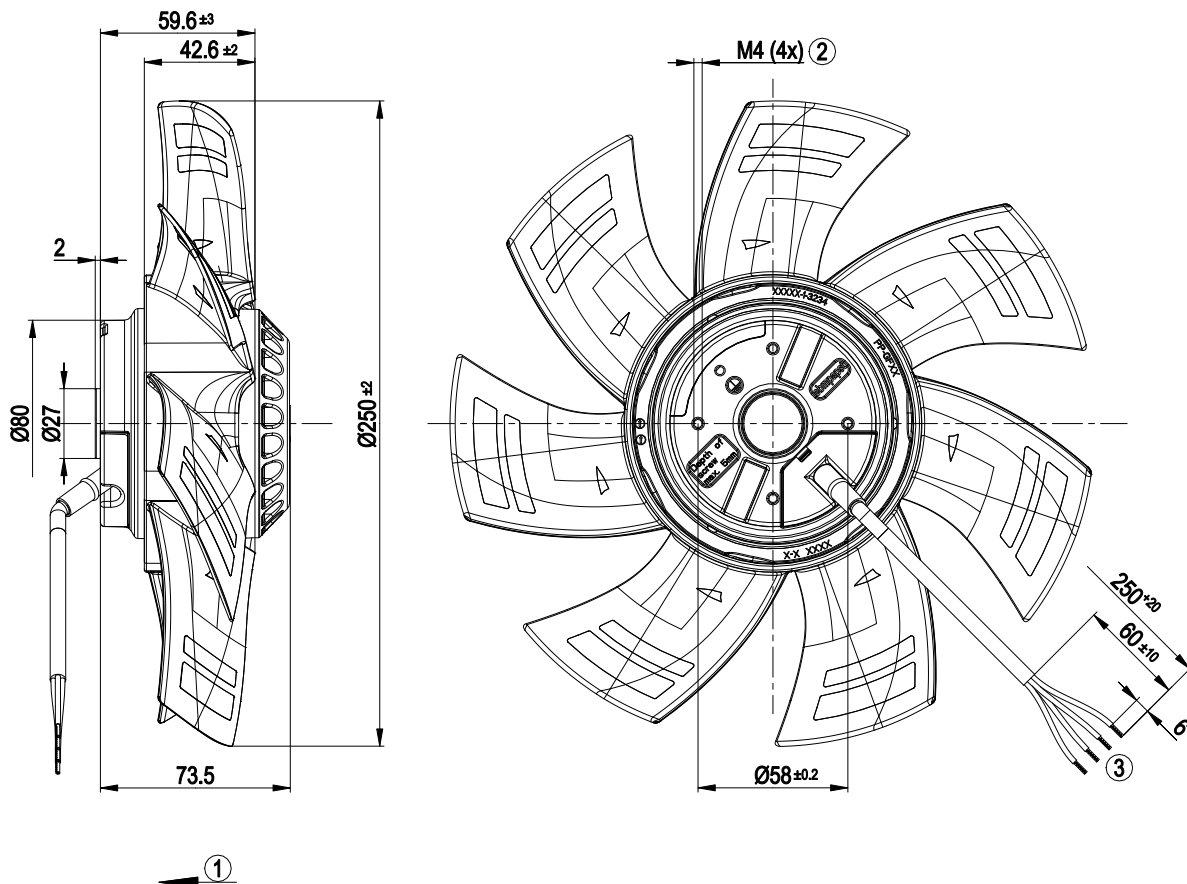

- | | |
|---|-------------------------------------|
| 1 | Direction of air flow "V" |
| 2 | Max. clearance for screw 5 mm |
| 3 | Cable PFA AWG20, 4x crimped splices |

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow				

A2E250-AP06-05

AC axial fan

sickle-shaped blades (S series), single-intake

Curves: Air performance 50 Hz

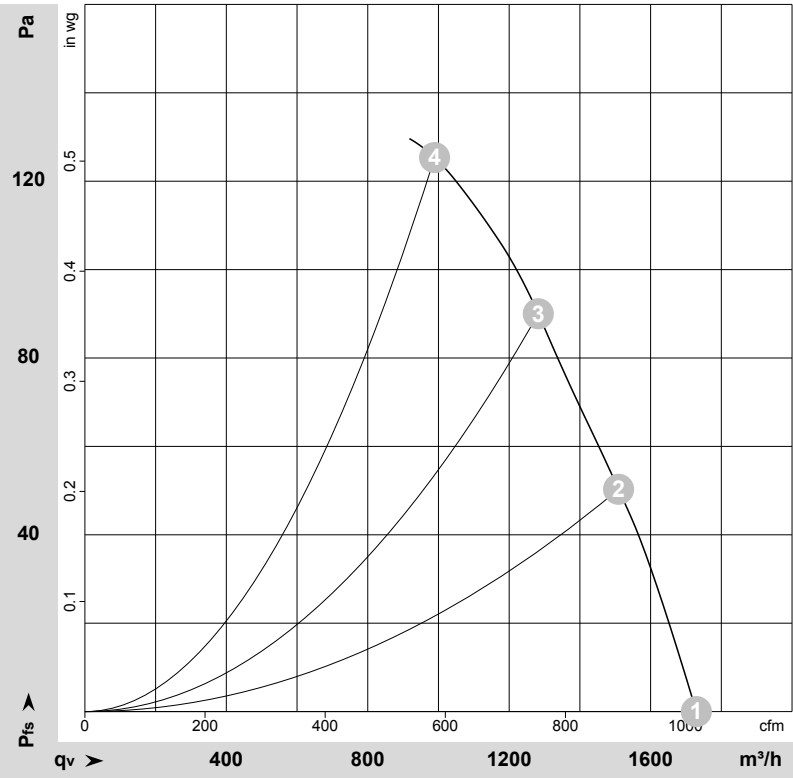

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-162235-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	50	2570	101	0.44	65	71	1730	0	1020	0.00
2	230	50	2475	111	0.49	65	71	1510	50	890	0.20
3	230	50	2395	119	0.52	65	72	1280	90	755	0.36
4	230	50	2350	125	0.55	68	75	990	125	580	0.50

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase




A2E250-AP06-05

AC axial fan

sickle-shaped blades (S series), single-intake

Curves: Air performance 60 Hz

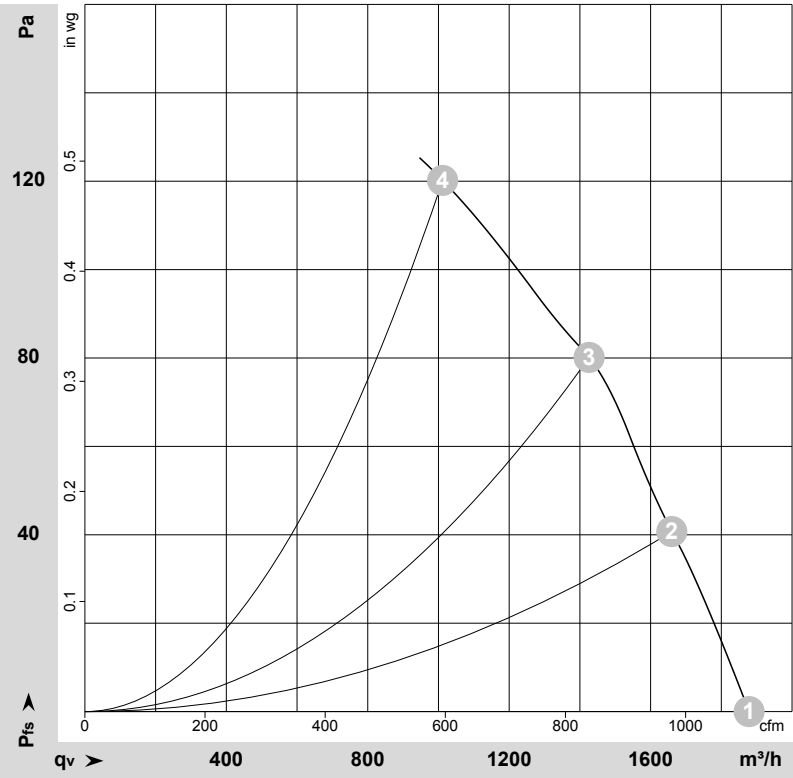

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-162389-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	60	2785	138	0.60	66	73	1880	0	1105	0.00
2	230	60	2620	145	0.64	66	72	1660	40	975	0.16
3	230	60	2465	155	0.67	65	72	1425	80	840	0.32
4	230	60	2325	160	0.70	68	74	1010	120	595	0.48

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

