

KARTA KATALOGOWA

A3G910-AV02-09

Wentylator osiowy EC HyBlade, łopatki sierpowe (seria S)


Producent: ebm-papst

Dane znamionowe		Budowa	
Napięcie znamionowe	3~ 400 V (380...480 V)	Średnica wirnika	910 mm
Częstotliwość	50/60 Hz	Materiał wirnika	tworzywo PP
Prędkość obrotowa	970 obr/min	Liczba łopatek	5
Pobór mocy	2600 W	Stopień ochrony	IP55
Pobór prądu	4 A	Klasa izolacji	F
Maks. przeciwcisnienie	180 Pa	Zabezpieczenie silnika	ochrona przed zablokowaniem wirnika
Temperatura otoczenia	-40...+75 °C	Masa	30 kg

Dane ErP (UE 327/2011)	
Sprawność całkowita	49,8 %
Przepływ w pkt. optymalnym	21845 m³/h
Przyrost ciśnienia	201 Pa
Regulacja obrotów	tak (MODBUS)

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

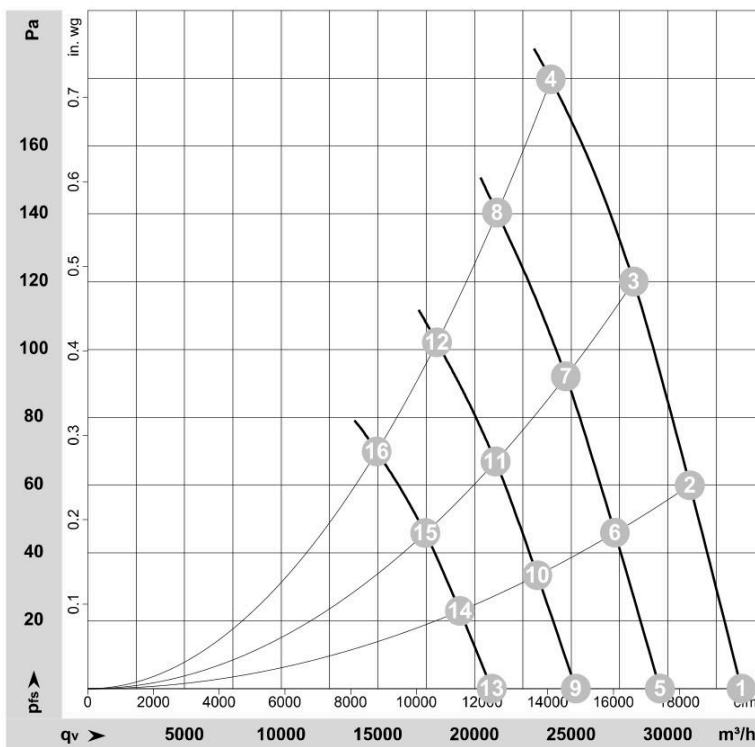

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-205734-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).

Wartości znamionowe dla punktu maksymalnego obciążenia; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199

biuro@luftberg.pl · www.luftberg.pl

A3G910-AV02-09

EC axial fan - HyBlade

sickle-shaped blades (S series)

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	A3G910-AV02-09	
Motor	M3G150-NA	

Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60

Method of obtaining data		ml
Speed (rpm)	min ⁻¹	970
Power consumption	W	2600
Current draw	A	4.0
Max. back pressure	Pa	180
Max. back pressure	in. wg	0.72
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	75

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	49.8	36.3	09 Power consumption P_{ed}	kW	2.58
02 Measurement category		A		09 Air flow q_v	m ³ /h	21845
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	201
04 Efficiency grade N		53.5	40	10 Speed (rpm) n	min ⁻¹	950
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).

The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-205734



A3G910-AV02-09

EC axial fan - HyBlade

sickle-shaped blades (S series)

Technical description

Weight	30 kg
Size	910 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum, painted gray
Blade material	Sheet aluminum insert, sprayed with PP plastic
Number of blades	5
Blade pitch	0°
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Reverse polarity and locked-rotor protection



A3G910-AV02-09

EC axial fan - HyBlade
sickle-shaped blades (S series)

Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1




A3G910-AV02-09

EC axial fan - HyBlade

sickle-shaped blades (S series)

Product drawing

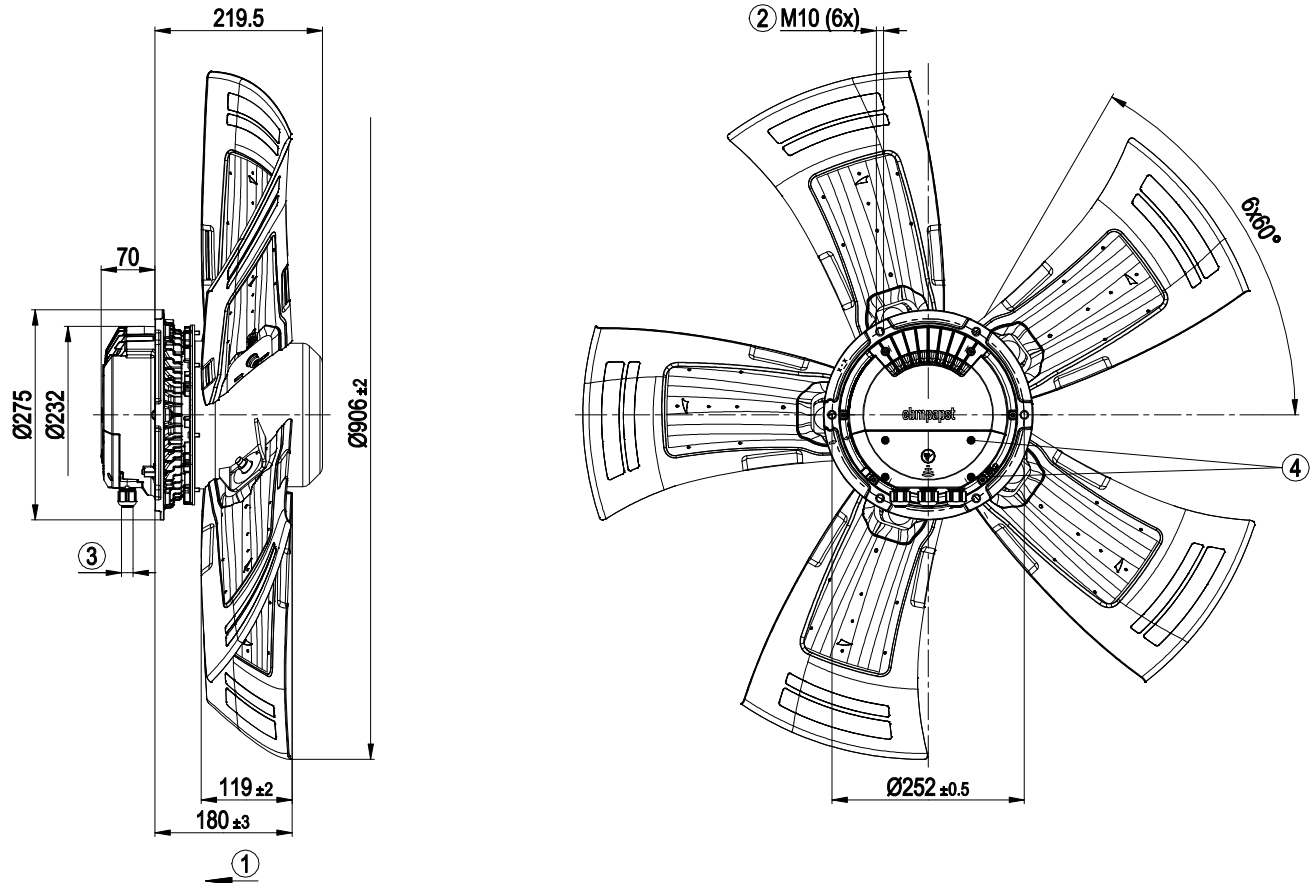


1	Airflow direction "V"
2	Max. clearance for screw 20 mm
3	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
4	Tightening torque 1.5 ± 0.2 Nm

A3G910-AV02-09

EC axial fan - HyBlade

sickle-shaped blades (S series)

Connection diagram

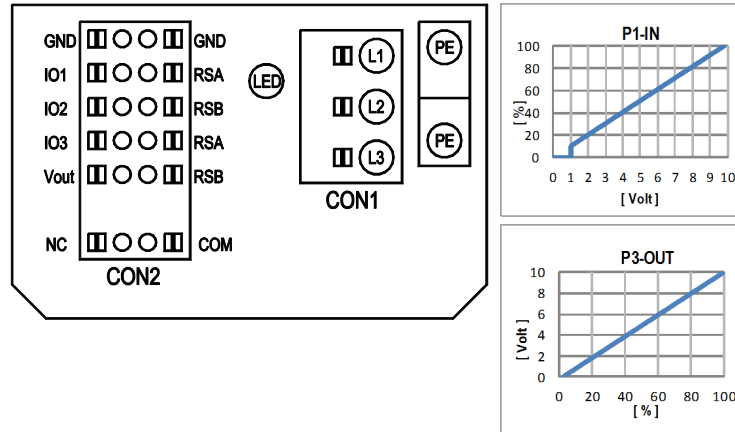

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Actual speed Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

EC axial fan - HyBlade

Terminal/plug assignment

configurable IO
functions: normal/
inverse

- configurable option


For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3

A3G910-AV02-09

EC axial fan - HyBlade

sickle-shaped blades (S series)

Curves: Air performance 50 Hz

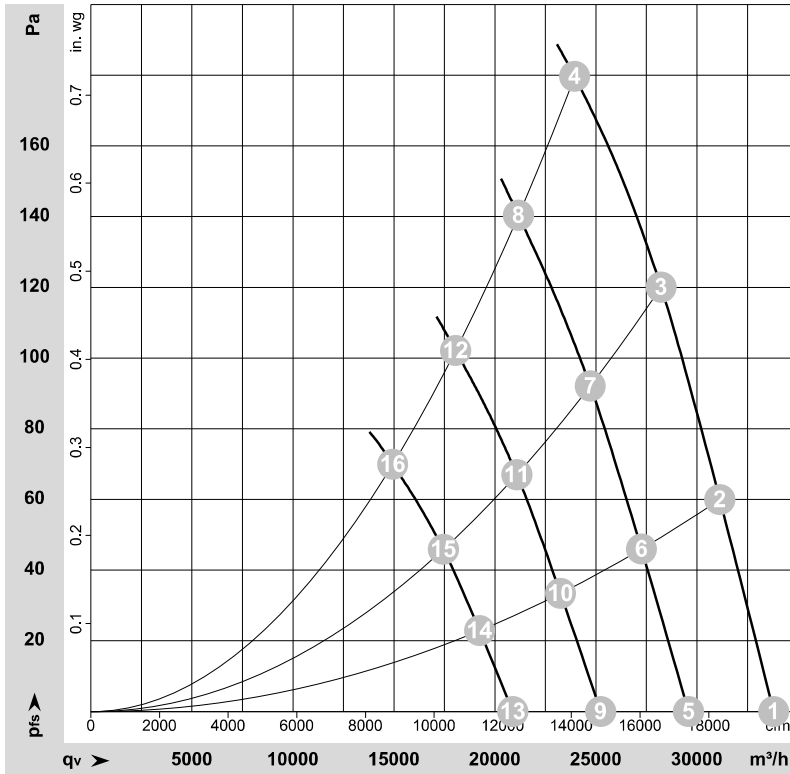

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-205734-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	3~	400	50	970	1840	2.89	70	77	77	33795	0	19890	0.00
2	3~	400	50	970	2106	3.28	69	76	76	31130	60	18325	0.24
3	3~	400	50	970	2361	3.66	69	76	76	28225	120	16610	0.48
4	3~	400	50	970	2600	4.00	72	78	78	23945	180	14090	0.72
5	3~	400	50	850	1234	1.94	67	74	74	29585	0	17410	0.00
6	3~	400	50	850	1413	2.20	66	73	73	27255	47	16040	0.19
7	3~	400	50	850	1586	2.46	66	73	72	24720	92	14550	0.37
8	3~	400	50	850	1767	2.73	69	75	75	21165	141	12455	0.57
9	3~	400	50	725	766	1.20	63	70	70	25235	0	14850	0.00
10	3~	400	50	725	877	1.37	62	69	69	23245	34	13680	0.14
11	3~	400	50	725	984	1.52	62	69	68	21085	67	12410	0.27
12	3~	400	50	725	1096	1.69	65	71	71	18050	102	10625	0.41
13	3~	400	50	600	434	0.68	58	65	65	20885	0	12290	0.00
14	3~	400	50	600	497	0.77	57	64	64	19240	23	11325	0.09
15	3~	400	50	600	558	0.86	57	64	64	17450	46	10270	0.18
16	3~	400	50	600	621	0.96	60	66	66	14940	70	8795	0.28

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

