

KARTA KATALOGOWA

D2E146-HT65-14

Wentylator promieniowy AC, łopatki zakrzywione do przodu, dwustronnie ssący, z obudową (z kołnierzem)


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 115 V	Wielkość	146 mm
Częstotliwość	60 Hz	Silnik	M2E068-EC
Prędkość obrotowa	2000 obr/min	Materiał wirnika	blacha stalowa ocynkowana ogniowo
Pobór mocy	430 W	Obudowa	tworzywo PP, czarne
Pobór prądu	3,75 A	Kierunek obrotów	w lewo, patrząc na wirnik
Kondensator	25 µF / 240 V	Stopień ochrony	IP20
Maks. wydajność	990 m³/h	Klasa izolacji	F
Maks. ciśnienie statyczne	670 Pa	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Temperatura otoczenia	-20...+40 °C	Łożyskowanie	ślizgowe (kalotowe)
		Podłączenie	wtyczka; skrzynka zaciskowa, kondensator wbudowany
		Masa	3,7 kg

Charakterystyka przepływowa (60 Hz)

Curves: Air performance 60 Hz

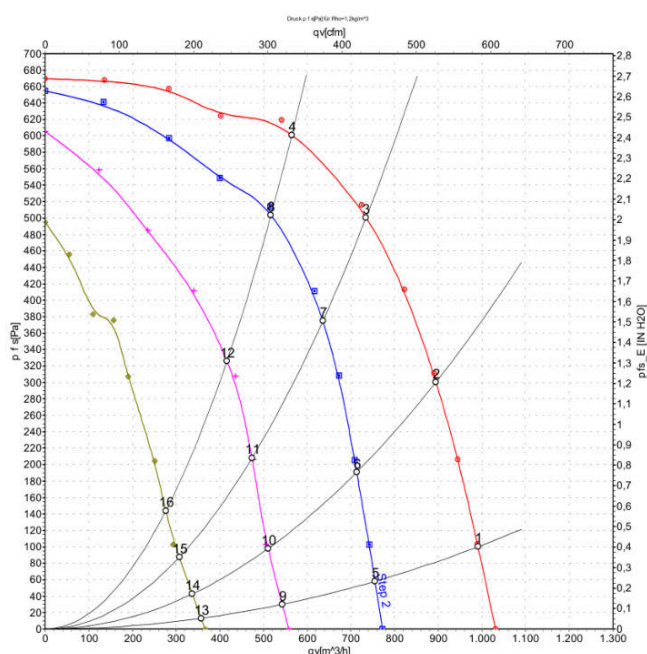

Measurement: LU-45289-1
Measurement: LU-45290-1
Measurement: LU-45291-1
Measurement: LU-45292-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

D2E146-HT65-14

AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	D2E146-HT65-14	
Motor	M2E068-EC	
Phase		1~
Nominal voltage	VAC	115
Frequency	Hz	60
Method of obtaining data		ml
Valid for approval/standard		CE
Speed (rpm)	min ⁻¹	2000
Power consumption	W	430
Current draw	A	3.75
Capacitor	µF	25
Capacitor voltage	VDB	240
Capacitor standard		S2 (CE)
Min. back pressure	Pa	100
Min. back pressure	inH2O	0.4
Min. ambient temperature	°C	-20
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



D2E146-HT65-14

AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Technical description


Weight	3.7 kg
Fan size	146 mm
Rotor surface	Cast in aluminum
Terminal box material	PP plastic, black
Impeller material	Sheet steel, hot-dip galvanized
Housing material	PP plastic, black
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Calotte bearing
Speed levels	4
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	With plug; Via terminal box, capacitor integrated and connected
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-1 in safety protection class	S2
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 113; UL 507

D2E146-HT65-14

AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Product drawing

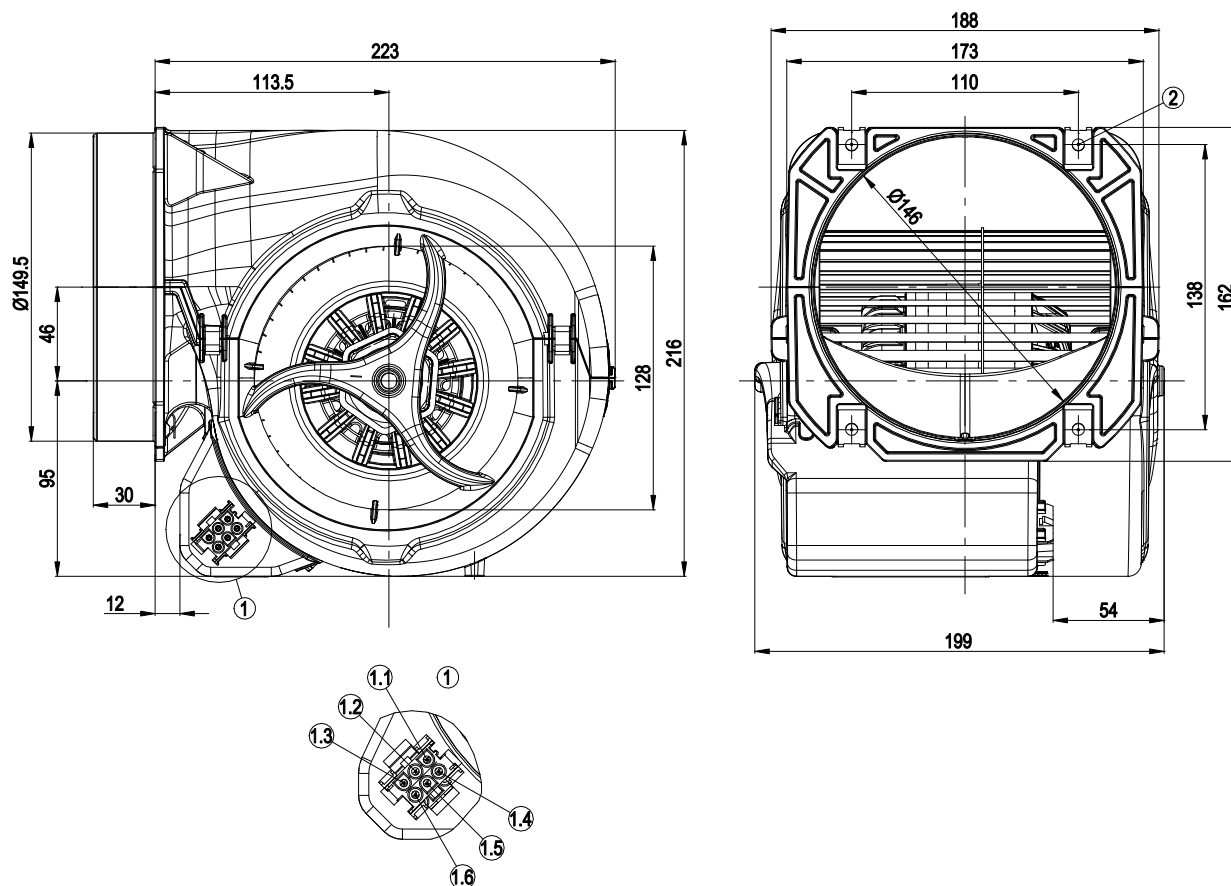


1	Coded plug system AMP Universal Mate-N-Lok; connector housing: AMP 926 682-3; 6x plug pin AMP 926 886-1
1.1	L = step 1
1.2	L = step 2
1.3	L = step 3
1.4	L = step 4
1.5	N
1.6	Protective earth
2	4x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus material thickness of mounting)

D2E146-HT65-14

AC centrifugal fan
forward-curved, dual-intake
with housing (flange)

Connection diagram



The switch must interrupt the circuit when switching.


1	Step 1 (min.)	2	Step 2	3	Step 3
4	Step 4 (max.)	5	N	6	PE protective earth
7	Speed increasing				



D2E146-HT65-14

AC centrifugal fan
forward-curved, dual-intake
with housing (flange)

Curves: Air performance 60 Hz

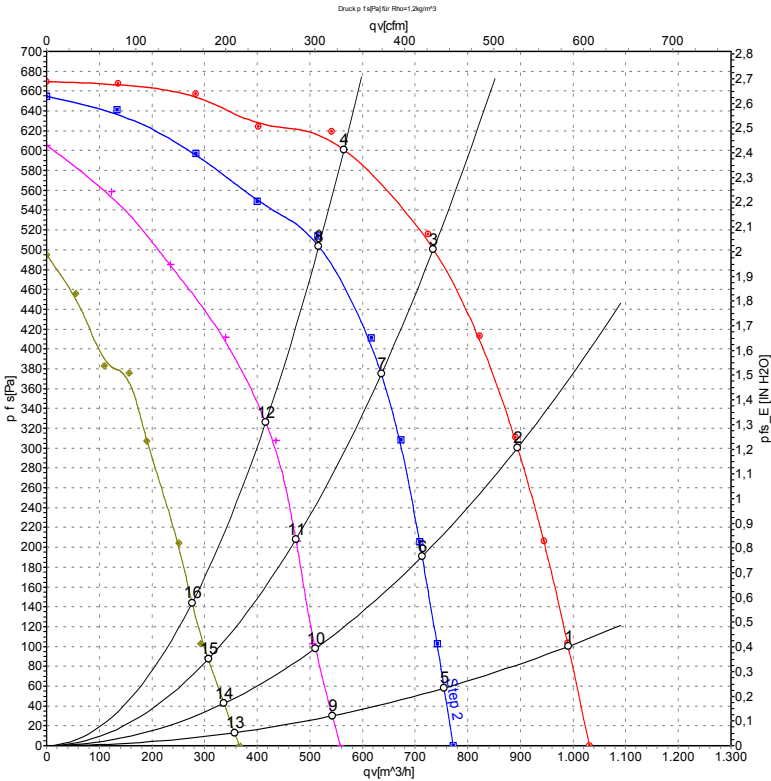

Measurement: LU-45289-1
Measurement: LU-45290-1
Measurement: LU-45291-1
Measurement: LU-45292-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Stage	U	f	n	P _e	I	q _v	P _{fS}	q _v	P _{fS}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	4	115	60	2000	430	3.75	990	100	585	0.40
2	4	115	60	2340	419	3.63	895	300	525	1.20
3	4	115	60	2685	382	3.31	735	500	430	2.01
4	4	115	60	2925	345	2.99	565	600	335	2.41
5	3	115	60	1560	325	2.87	755	59	445	0.24
6	3	115	60	1890	313	2.79	715	191	420	0.77
7	3	115	60	2325	288	2.63	635	376	375	1.51
8	3	115	60	2710	256	2.42	515	512	305	2.06
9	2	115	60	1135	252	2.27	540	29	320	0.12
10	2	115	60	1350	244	2.22	510	91	300	0.37
11	2	115	60	1755	234	2.16	475	211	280	0.85
12	2	115	60	2175	217	2.06	415	329	245	1.32
13	1	115	60	750	194	1.78	355	13	210	0.05
14	1	115	60	900	192	1.77	335	42	200	0.17
15	1	115	60	1115	188	1.74	305	82	180	0.33
16	1	115	60	1415	183	1.71	275	143	160	0.57

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fS} = Pressure increase

