

KARTA KATALOGOWA

D4E225-CC01-30

Wentylator promieniowy AC, łopatki zakrzywione do przodu, dwustronnie ssący, z obudową (z dużym kołnierzem)


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Wielkość	225 mm
Częstotliwość	50 Hz	Silnik	M4E074-LA
Prędkość obrotowa	1210 obr/min	Materiał wirnika	blacha stalowa ocynkowana
Pobór mocy	540 W	Obudowa	blacha stalowa ocynkowana
Pobór prądu	2,4 A	Kierunek obrotów	w lewo, patrząc na wirnik
Kondensator	16 µF / 400 V	Stopień ochrony	IP22
Temperatura otoczenia	-25...+30 °C	Klasa izolacji	B
Dane ErP (UE 327/2011)		Zabezpieczenie silnika	termik (TOP), izolacja podstawowa
Sprawność całkowita	40,2 %	Łożyskowanie	kulkowe
Przepływ w pkt. optymalnym	1595 m³/h	Masa	13 kg
Przyrost ciśnienia	355 Pa		
Regulacja prędkości (ErP)	nie		

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

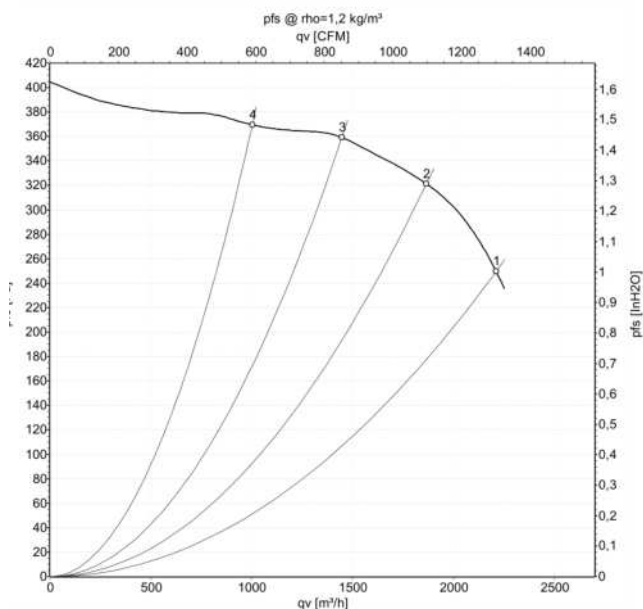

Measurement: LU-135956-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).

Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199

biuro@luftberg.pl · www.luftberg.pl

D4E225-CC01-30

AC centrifugal fan

forward-curved, dual-intake
with housing (large flange)


ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	D4E225-CC01-30	
Motor	M4E074-LA	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Method of obtaining data		ml
Valid for approval/standard		CE
Speed (rpm)	min ⁻¹	1210
Power consumption	W	540
Current draw	A	2.4
Capacitor	µF	16
Capacitor voltage	VDB	400
Capacitor standard		S2 (CE)
Min. back pressure	Pa	250
Min. back pressure	in. wg	1
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	30

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015			
01 Overall efficiency η_e	%	40.2	40.2	09 Power consumption P_e	kW	0.4
02 Measurement category		B		09 Air flow q_v	m ³ /h	1595
03 Efficiency category		Total		09 Pressure increase p_f	Pa	355
04 Efficiency grade N		49	49	10 Speed (rpm) n	min ⁻¹	1345
05 Variable speed drive		No		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_f / 100\,000\text{ Pa}$

LU-135956



D4E225-CC01-30

AC centrifugal fan

forward-curved, dual-intake
with housing (large flange)


Technical description

Weight	13 kg
Fan size	225 mm
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Support structure material	Sheet steel, galvanized
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP22
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F2-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CCC

D4E225-CC01-30


AC centrifugal fan
forward-curved, dual-intake
with housing (large flange)

Product drawing

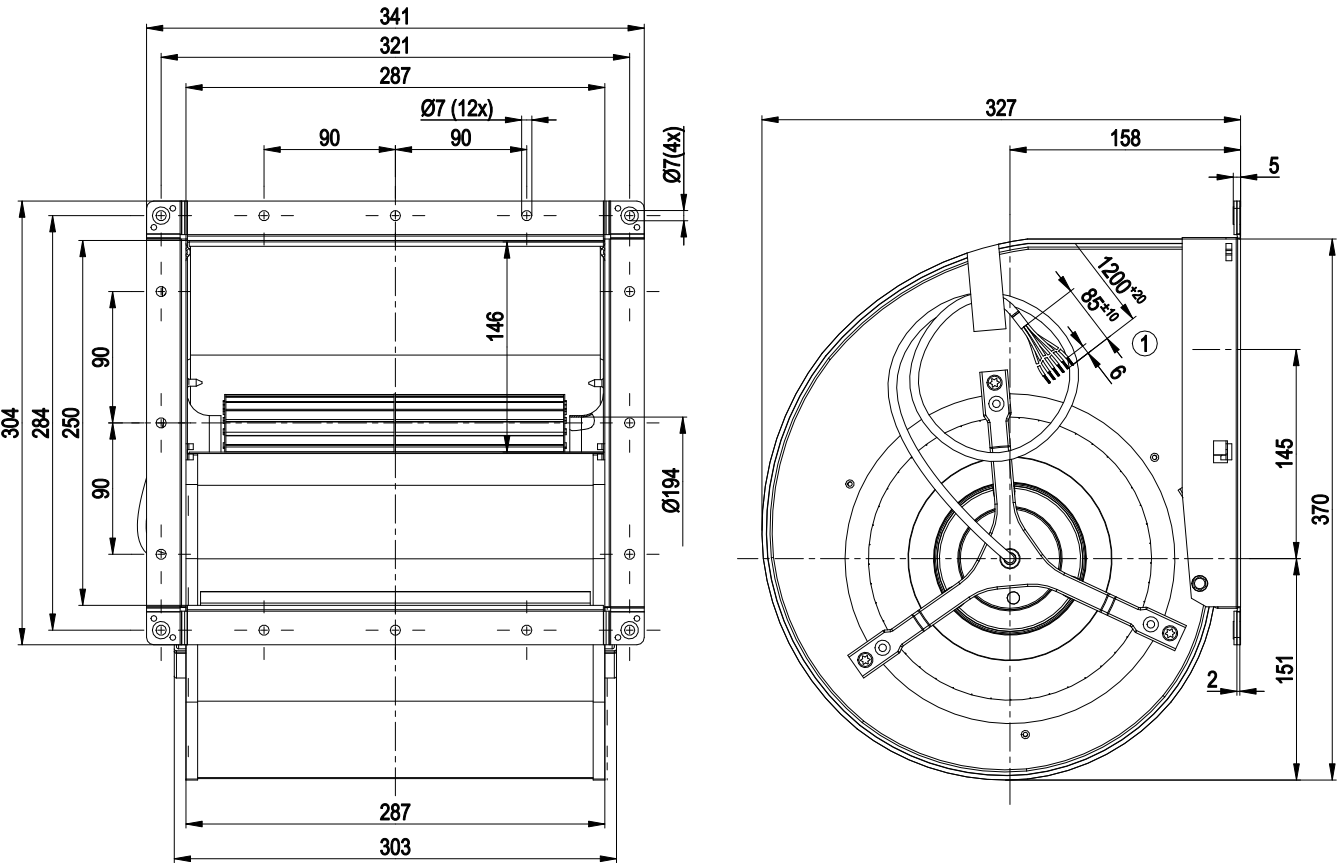

1 Cable ETFE AWG20 0.5 mm², 6x crimped splices

Connection diagram



U1	blue	Z	brown	U2	black
PE	green/yellow	TOP	2x gray		




D4E225-CC01-30

AC centrifugal fan

forward-curved, dual-intake

with housing (large flange)

Curves: Air performance 50 Hz

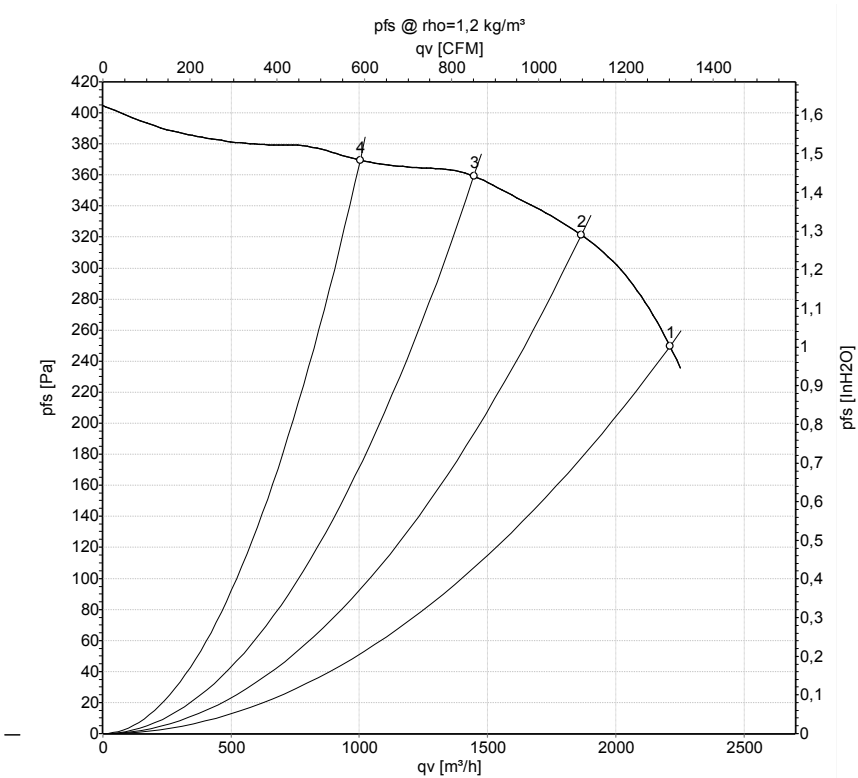

Measurement: LU-135956-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	230	50	1210	540	2.40	2210	250	1300	1.00
2	230	50	1300	459	2.04	1865	320	1100	1.28
3	230	50	1365	378	1.71	1445	360	850	1.45
4	230	50	1405	320	1.48	1005	370	590	1.49

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

