

KARTA KATALOGOWA

G2E120-AR38-01

Wentylator promieniowy AC, łopatki zakrzywione do przodu, jednostronnie ssący, z obudową (z kołnierzem)


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Wielkość	120 mm
Częstotliwość	50 / 60 Hz	Silnik	M2E068-BF
Prędkość obrotowa	2500 / 2600 obr/min	Materiał wirnika	blacha stalowa ocynkowana ogniowo; blacha stalowa ocynkowana
Pobór mocy	83 / 110 W	Obudowa	odlew aluminiowy
Pobór prądu	0,37 / 0,5 A	Kierunek obrotów	w prawo, patrząc na wirnik
Kondensator	2 µF / 450 V	Stopień ochrony	IP44
Maks. wydajność	255 m³/h	Klasa izolacji	B
Maks. ciśnienie statyczne	355 Pa	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Temperatura otoczenia	min. -25 °C; maks. 50 / 60 °C	Łożyskowanie	kulkowe
		Masa	2 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

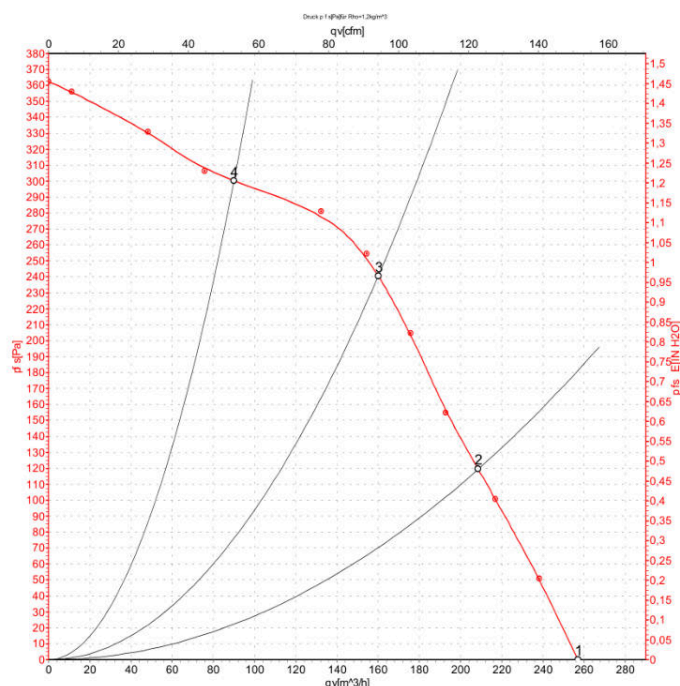

Measurement: LU-4577

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy swobodnym wydmuchu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

G2E120-AR38-01

AC centrifugal fan
forward-curved, single-intake
with housing (flange)



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	G2E120-AR38-01		
Motor	M2E068-BF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		fa	fa
Valid for approval/standard		CE	CE
Speed	min ⁻¹	2500	2600
Power consumption	W	83	110
Current draw	A	0.37	0.5
Capacitor	µF	2	2
Capacitor voltage	VDB	450	450
Min. back pressure	Pa	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	50	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



G2E120-AR38-01

AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	2 kg
Fan size	120 mm
Impeller material	Sheet steel, hot-dip galvanized; sheet steel, galvanized
Housing material	Die-cast aluminum
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F0
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor storage	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE

G2E120-AR38-01

AC centrifugal fan


forward-curved, single-intake
with housing (flange)

Product drawing

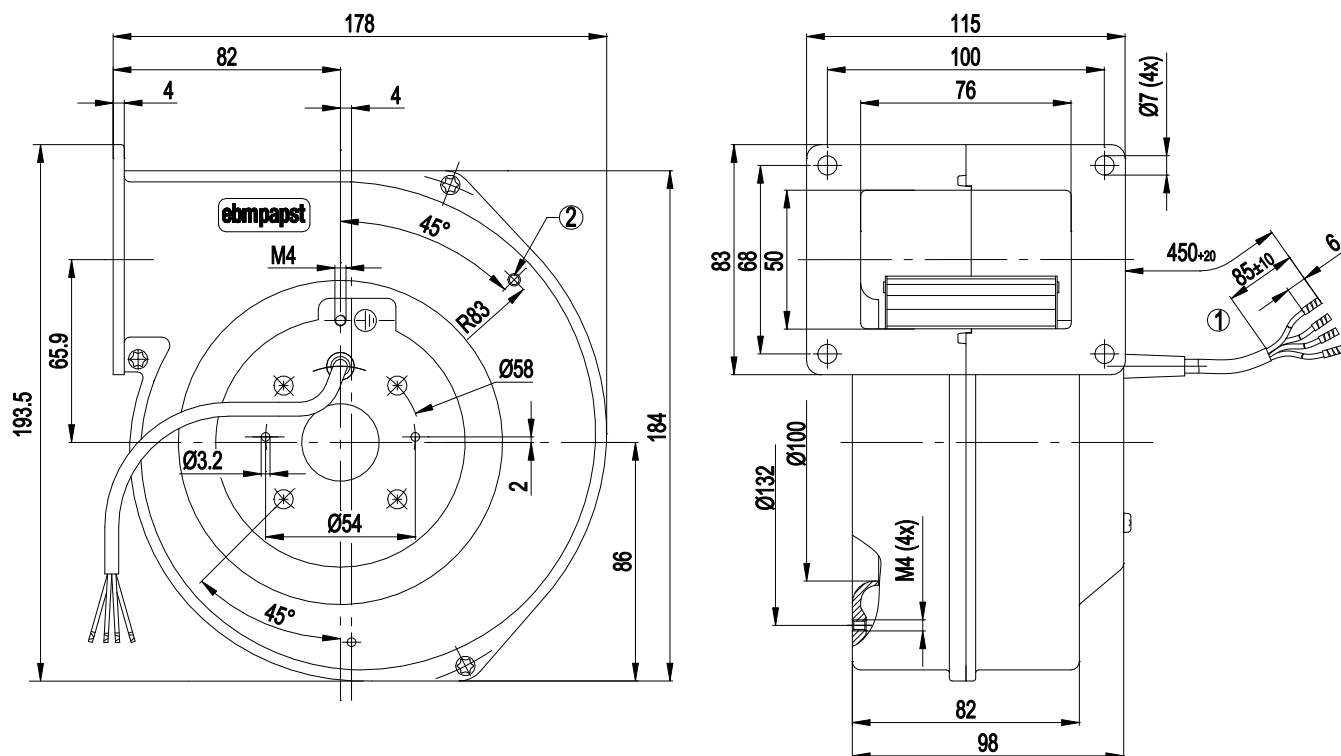

- | | |
|---|--|
| 1 | Cable PVC 4G 0.5 mm², 4x crimped splices |
| 2 | Tapping hole for self-tapping M4 screw |

Connection diagram

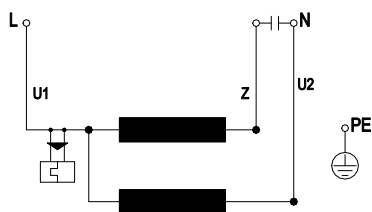


U1	blue	Z	brown	U2	black
PE	green/yellow				

G2E120-AR38-01

AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

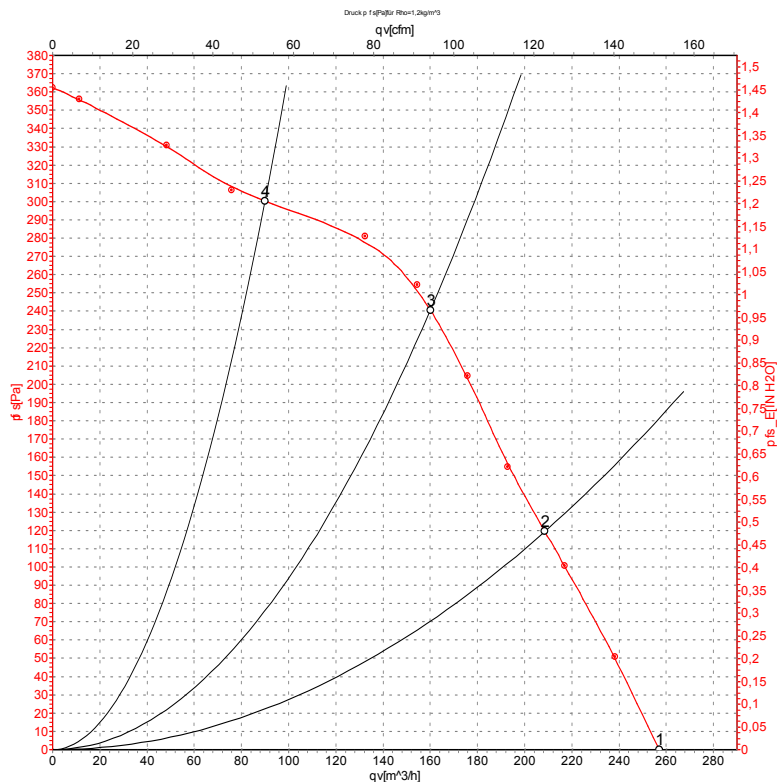

Measurement: LU-4577

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	2500	83	0.37	255	0
2	230	50	2620	78	0.35	210	120
3	230	50	2715	73	0.33	160	240
4	230	50	2805	68	0.32	90	300


U = Power supply · f = Frequency · n = Speed · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



G2E120-AR38-01

AC centrifugal fan
forward-curved, single-intake
with housing (flange)

Curves: Air performance 60 Hz

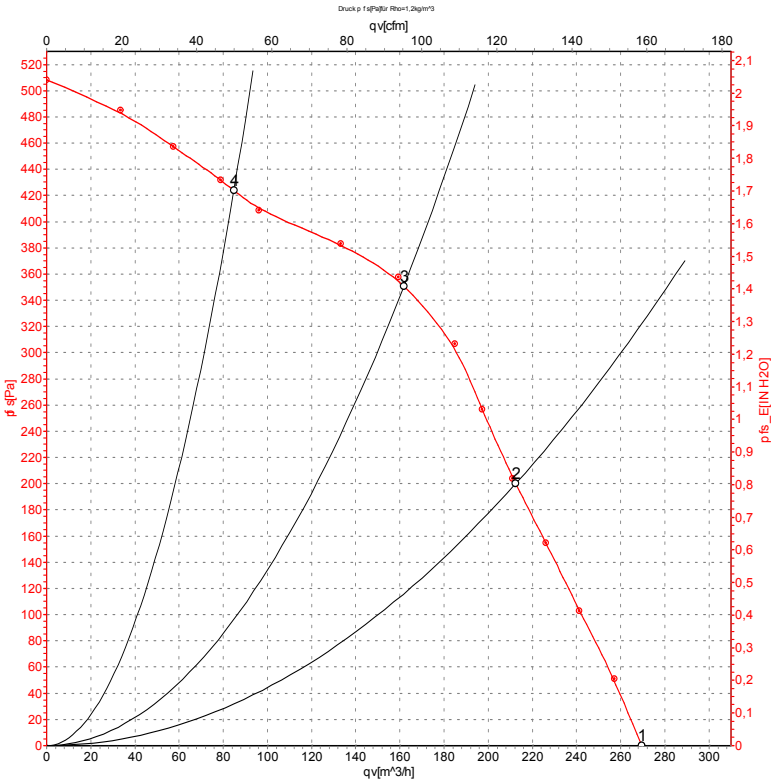

Measurement: LU-4580

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	60	2600	110	0.50	270	0
2	230	60	2965	97	0.42	210	200
3	230	60	3145	89	0.39	160	350
4	230	60	3325	80	0.35	85	425

U = Power supply · f = Frequency · n = Speed · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

