

## KARTA KATALOGOWA

# G2S120-FE03-22

Wentylator promieniowy AC, łopatki zakrzywione do przodu, z obudową (bez kołnierza)

Producent: ebm-papst




Zdjęcie poglądowe

| Dane znamionowe           |              | Budowa           |                                   |
|---------------------------|--------------|------------------|-----------------------------------|
| Napięcie znamionowe       | 1~ 230 V     | Wielkość         | 120 mm                            |
| Częstotliwość             | 50 Hz        | Silnik           | M2S052-CA                         |
| Prędkość obrotowa         | 2800 obr/min | Materiał wirnika | blacha stalowa malowana na czarno |
| Pobór mocy                | 43 W         | Obudowa          | odlew aluminiowy                  |
| Pobór prądu               | 0,3 A        | Kierunek obrotów | w prawo, patrząc na wirnik        |
| Maks. wydajność           | 30 m³/h      | Stopień ochrony  | IP00                              |
| Maks. ciśnienie statyczne | 305 Pa       | Klasa izolacji   | F                                 |
| Temperatura otoczenia     | maks. 55 °C  | Łożyskowanie     | kulkowe                           |
|                           |              | Masa             | 1,1 kg                            |

## Charakterystyka przepływowa (50 Hz)

### Curves: Air performance 50 Hz

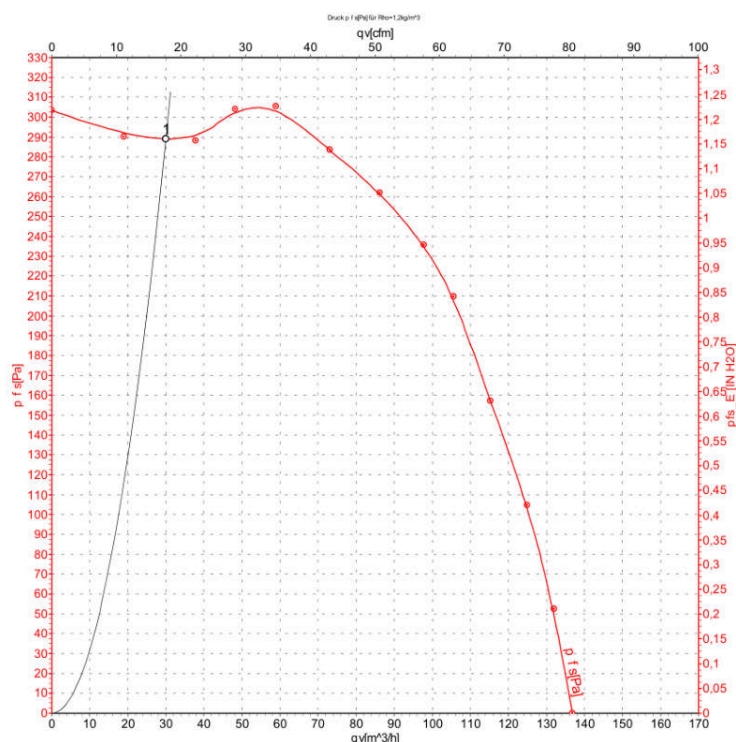

Measurement: LU-57619-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

## Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199  
biuro@luftberg.pl · www.luftberg.pl

**G2S120-FE03-22**

# AC centrifugal fan

forward-curved

with housing (without flange)

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

## Nominal data

|       |                |  |
|-------|----------------|--|
| Type  | G2S120-FE03-22 |  |
| Motor | M2S052-CA      |  |

|                 |     |     |
|-----------------|-----|-----|
| Phase           |     | 1~  |
| Nominal voltage | VAC | 230 |
| Frequency       | Hz  | 50  |

|                             |                   |      |
|-----------------------------|-------------------|------|
| Method of obtaining data    |                   | ml   |
| Valid for approval/standard |                   | CE   |
| Speed (rpm)                 | min <sup>-1</sup> | 2800 |
| Power consumption           | W                 | 43   |
| Current draw                | A                 | 0.3  |
| Min. back pressure          | Pa                | 245  |
| Min. back pressure          | in. wg            | 0.98 |
| Max. ambient temperature    | °C                | 55   |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



**G2S120-FE03-22**

# AC centrifugal fan

forward-curved

with housing (without flange)

## Technical description

|                                                                                   |                                                                                                                |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>Weight</b>                                                                     | 1.1 kg                                                                                                         |
| <b>Size</b>                                                                       | 120 mm                                                                                                         |
| <b>Motor size</b>                                                                 | 52                                                                                                             |
| <b>Rotor surface</b>                                                              | Painted black                                                                                                  |
| <b>Impeller material</b>                                                          | Sheet steel, painted black                                                                                     |
| <b>Housing material</b>                                                           | Die-cast aluminum                                                                                              |
| <b>Direction of rotation</b>                                                      | Clockwise, viewed toward rotor                                                                                 |
| <b>Degree of protection</b>                                                       | IP00                                                                                                           |
| <b>Insulation class</b>                                                           | "F"                                                                                                            |
| <b>Moisture (F) / Environmental (H) protection class</b>                          | H1                                                                                                             |
| <b>Max. permitted ambient temp. for motor (transport/storage)</b>                 | + 80 °C                                                                                                        |
| <b>Min. permitted ambient temp. for motor (transport/storage)</b>                 | - 40 °C                                                                                                        |
| <b>Installation position</b>                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                   |
| <b>Condensation drainage holes</b>                                                | On rotor side                                                                                                  |
| <b>Mode</b>                                                                       | S1                                                                                                             |
| <b>Motor bearing</b>                                                              | Ball bearing                                                                                                   |
| <b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b> | < 0.75 mA                                                                                                      |
| <b>With cable</b>                                                                 | Variable                                                                                                       |
| <b>Protection class</b>                                                           | Built-in component with basic insulation, protection class results from installation according to intended use |
| <b>Conformity with standards</b>                                                  | EN 60034-1; EN 60204-1; EN 60335-1, motor not provided with overheating protection at the factory; CE          |


G2S120-FE03-22

# AC centrifugal fan

forward-curved


with housing (without flange)

## Product drawing

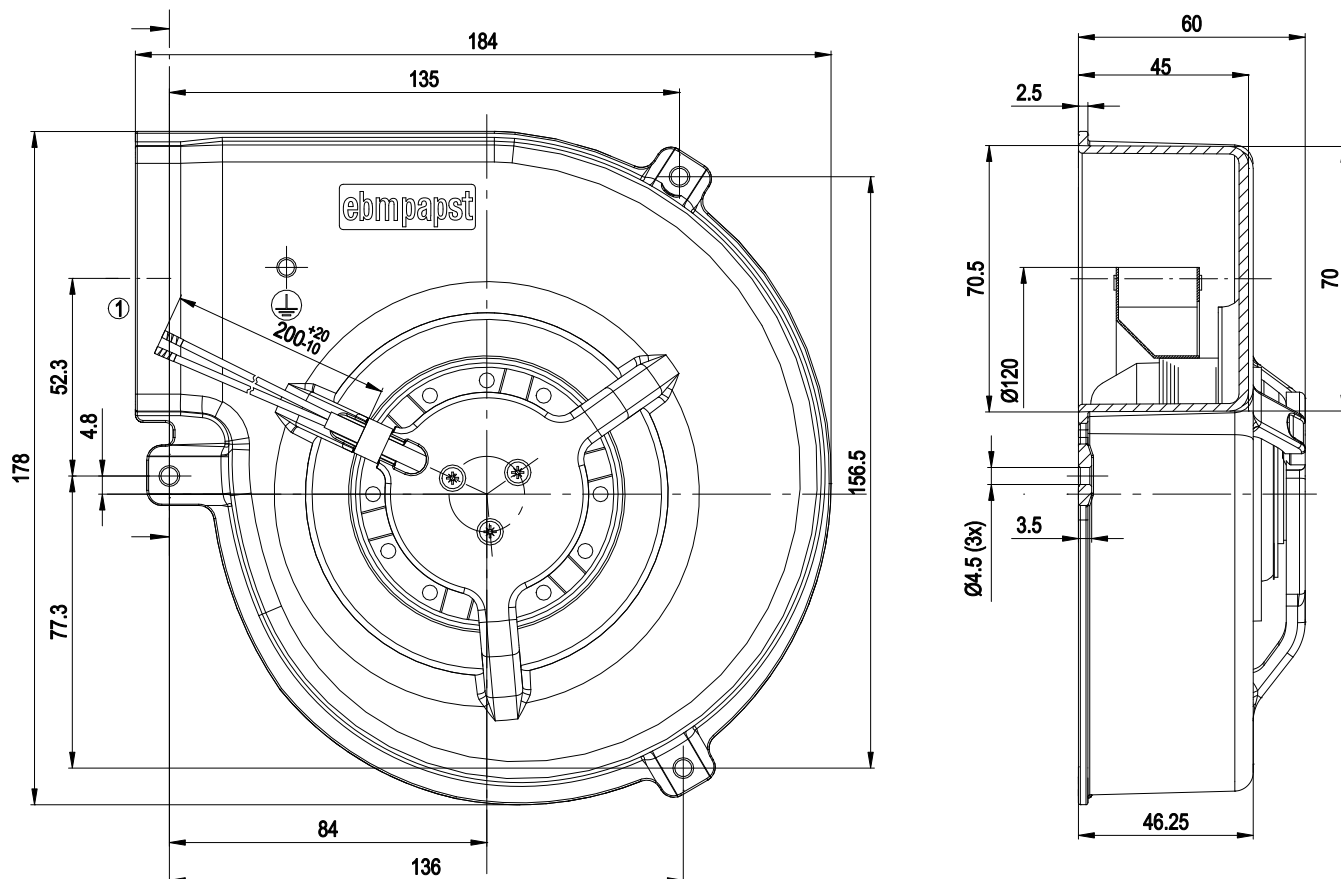

1 Cable Dipotherm, 2x crimped splices

## Connection diagram

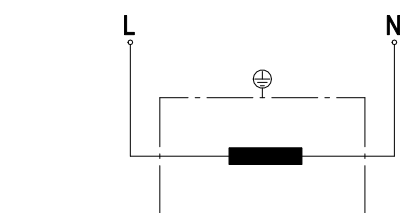


L white

N white

G2S120-FE03-22

AC centrifugal fan  
forward-curved  
with housing (without flange)

Curves: Air performance 50 Hz

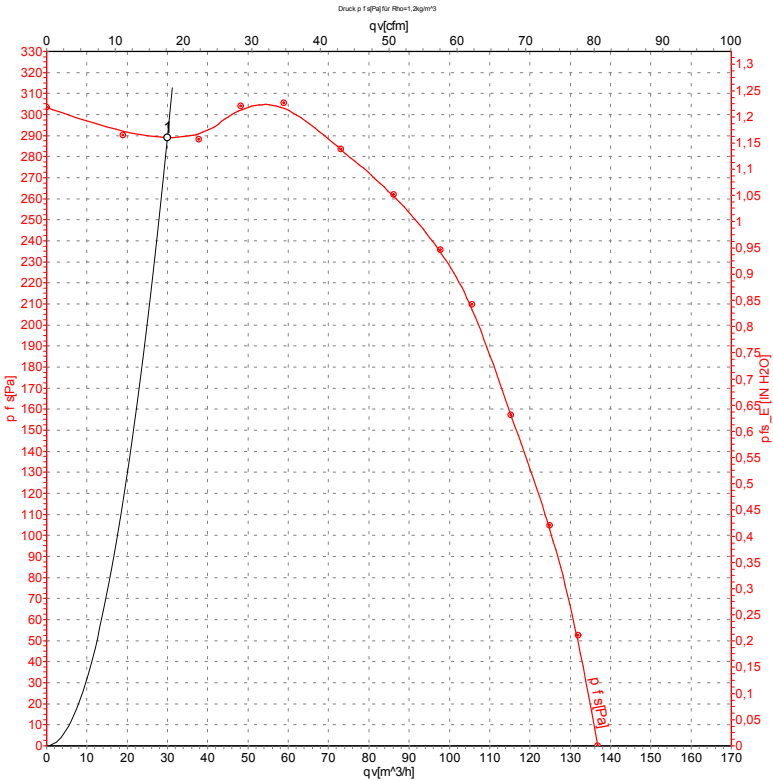

Measurement: LU-57619-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|----------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h           | Pa              | cfm            | in. wg          |
| 1 | 230 | 50 | 2800              | 43             | 0.30 | 30             | 289             | 20             | 1.16            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

