

KARTA KATALOGOWA

G3G146-AB54-01

Wentylator promieniowy EC, łopatki zakrzywione do przodu, jednostronnie ssący, z obudową (z kołnierzem)


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V (200...277 V)	Wielkość	146 mm
Częstotliwość	50/60 Hz	Silnik	M3G074-CF
Prędkość obrotowa	2520 obr/min	Materiał wirnika	blacha stalowa ocynkowana ogniowo
Pobór mocy	175 W	Obudowa	odlew aluminiowy
Pobór prądu	1,1 A	Obudowa elektroniki	odlew aluminiowy
Maks. wydajność	610 m³/h	Kierunek obrotów	w prawo, patrząc na wirnik
Maks. ciśnienie statyczne	620 Pa	Stopień ochrony	IP44
Temperatura otoczenia	-25...+60 °C	Klasa izolacji	B
Regulacja obrotów	0-10 V / PWM	Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
		Łożyskowanie	kulkowe
		Masa	3,6 kg

Charakterystyka przepływowa (50 Hz)

Charts: Air flow 50 Hz

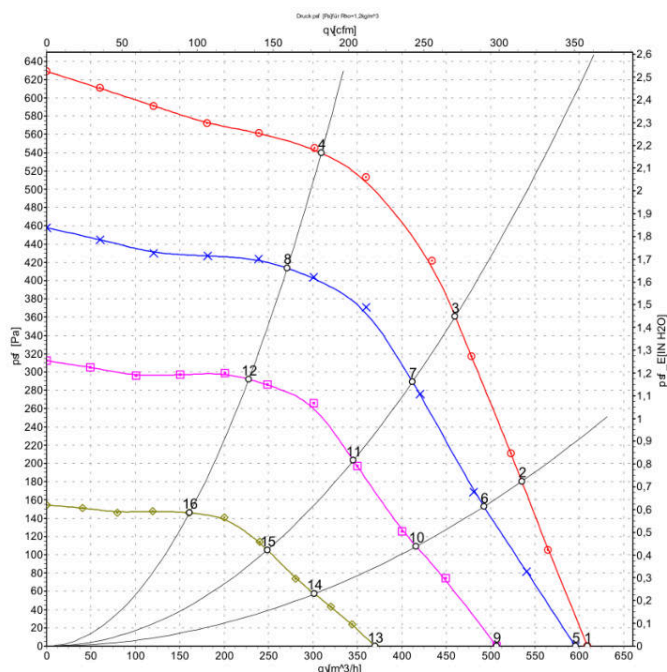

Measurement: LU-69079
Measurement: LU-67514
Measurement: LU-67515
Measurement: LU-67516

Air performance measured as per ISO 5801 Installation Category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy swobodnym wydmuchu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

G3G146-AB54-01

EC centrifugal fan

forward curved, single inlet
with housing (flange)


ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	G3G146-AB54-01	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Type of data definition		rfa
Speed	min ⁻¹	2520
Power input	W	175
Current draw	A	1.1
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

G3G146-AB54-01

EC centrifugal fan

forward curved, single inlet
with housing (flange)

Technical features


Leakage current	<= 3.5 mA
Size	146 mm
Operation mode	S1
Direction of rotation	Clockwise, seen on rotor
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-3 (household environment)
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
Humidity class	F3-1
Insulation class	"B"
Cable exit	Variable
Condensate discharge holes	None
Motor bearing	Ball bearing
Mass	3.6 kg
Material of electronics housing	Die-cast aluminium
Housing material	Die-cast aluminium
Material of impeller	Sheet steel, hot-galvanised
Motor protection	Thermal overload protector (TOP) wired internally
Product conforming to standard	CE; EN 60335-1; EN 60950-1; EN 61800-5-1
Surface of rotor	Thick layer passivated
Type of protection	IP 44; Depending on installation and position
Protection class	I
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Over-temperature protected electronics / motor
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Approval	CSA C22.2 Nr.77; UL 2111

G3G146-AB54-01

EC centrifugal fan

forward curved, single inlet
with housing (flange)

Product drawing

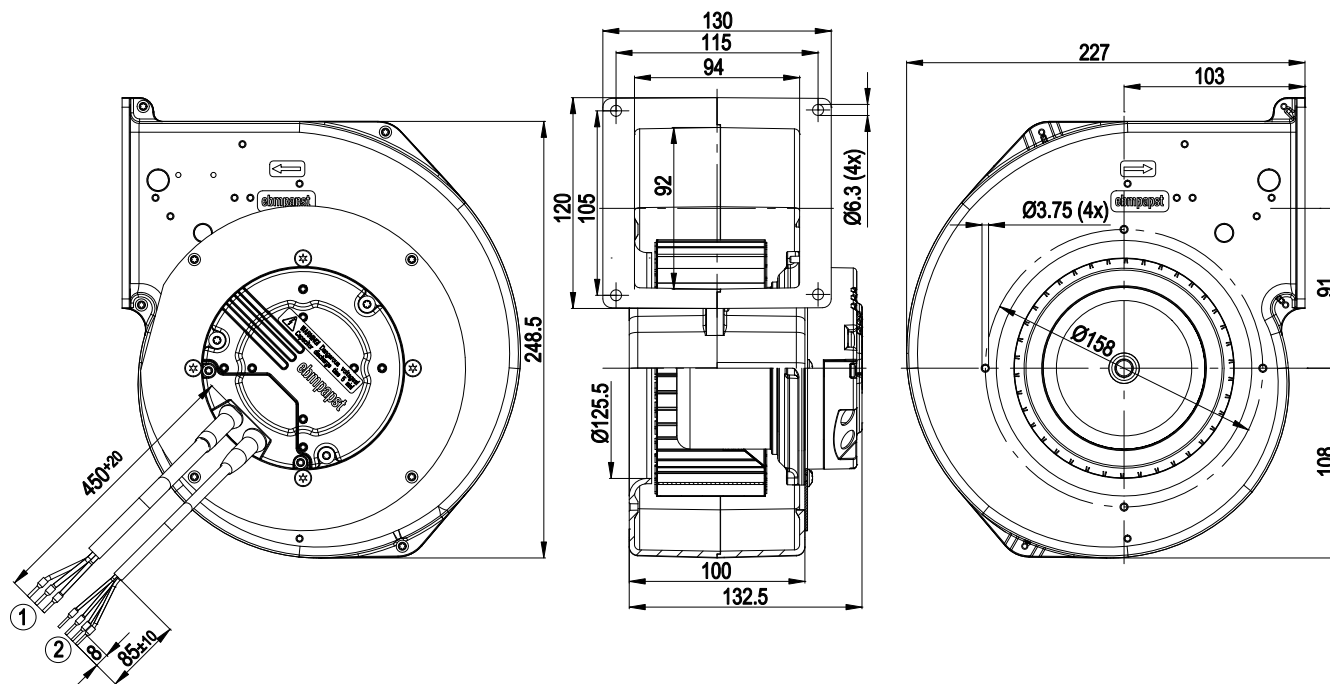

- | | |
|---|---|
| 1 | Connection line AWG18, 3 x crimped core-end sleeves |
| 2 | Control line AWG22, 4 x crimped core-end sleeves |


G3G146-AB54-01

EC centrifugal fan

forward curved, single inlet

with housing (flange)

Connection screen

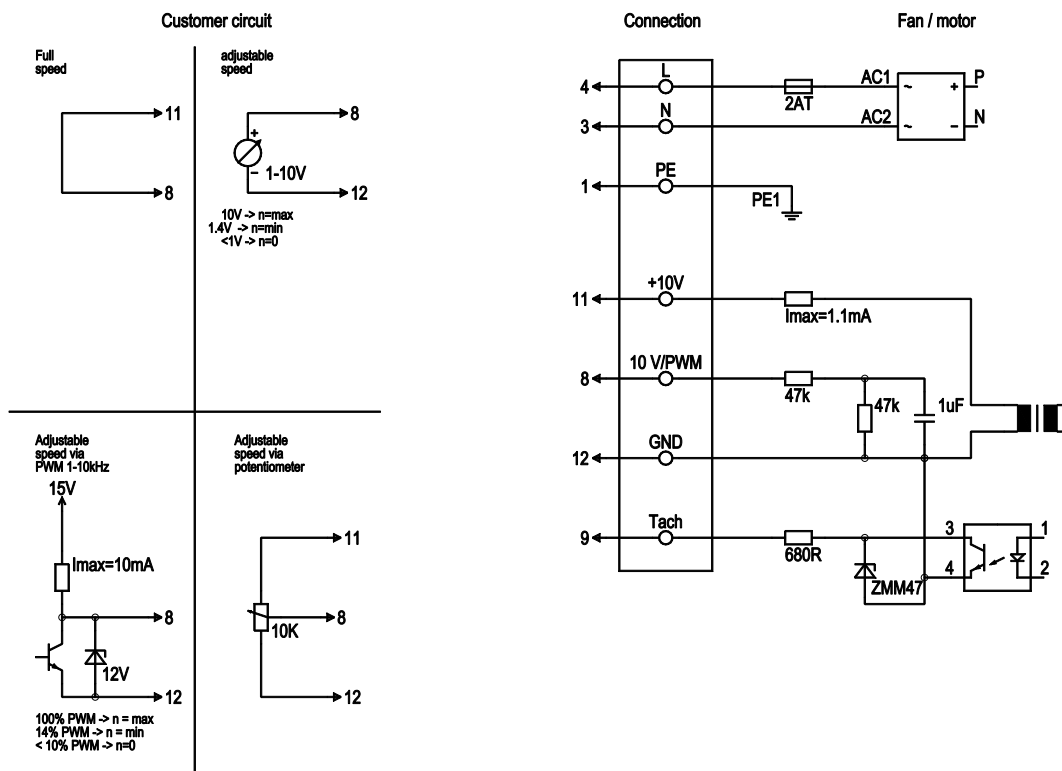


Line	No.	Signal	Colour	Function / assignment
	4	L	black	Power supply 230 VAC, 50-60 Hz, see type plate for voltage range
	3	N	blue	Neutral conductor
	1	PE	green/yellow	Protective earth
	8	0-10 V PWM	yellow	Control input 0 - 10 V or PWM, electrically isolated
	9	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated
	11	10V / max 1.1 mA	red	Voltage output 10 V / max. 1.1 mA, electrically isolated
	12	GND	blue	GND - Connection for control interface

G3G146-AB54-01

EC centrifugal fan

forward curved, single inlet
with housing (flange)

Charts: Air flow 50 Hz

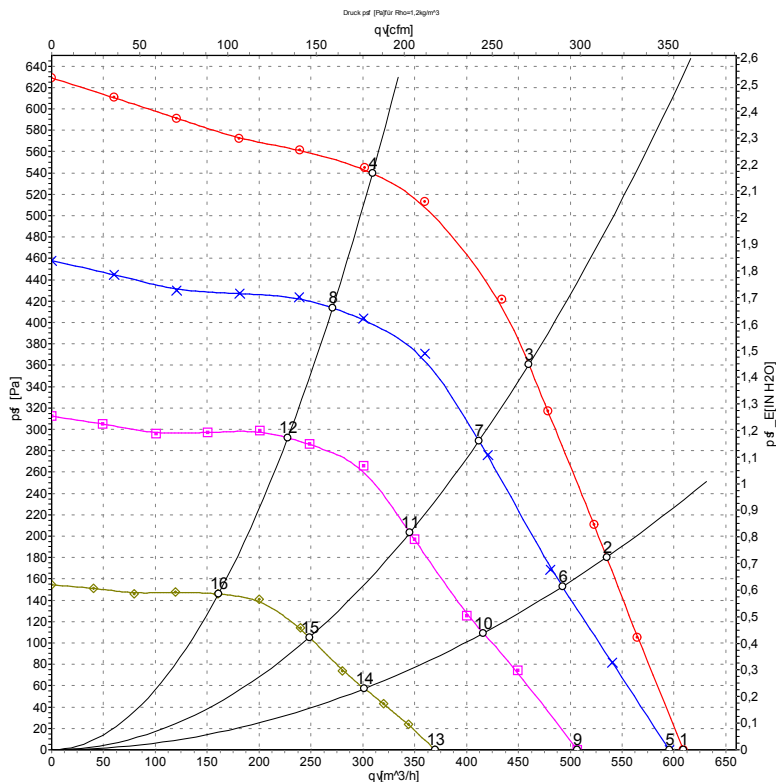

Measurement: LU-69079
Measurement: LU-67514
Measurement: LU-67515
Measurement: LU-67516

Air performance measured as per ISO 5801 Installation Category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P ₁	I	qv	P _{sf}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	2520	175	1.27	610	0
2	230	50	2775	172	1.24	535	180
3	230	50	2940	161	1.17	460	360
4	230	50	3140	124	0.92	310	540
5	230	50	2430	172	1.24	595	0
6	230	50	2525	142	1.04	490	152
7	230	50	2605	121	0.91	410	290
8	230	50	2735	90	0.67	270	414
9	230	50	2075	108	0.78	505	0
10	230	50	2145	89	0.66	415	109
11	230	50	2195	74	0.55	345	203
12	230	50	2280	57	0.43	230	292
13	230	50	1535	48	0.35	370	0
14	230	50	1565	39	0.30	300	57
15	230	50	1600	33	0.26	250	106
16	230	50	1635	26	0.21	160	146