

KARTA KATALOGOWA

G3G250-GN17-01

Wentylator promieniowy EC, łopatki zakrzywione do tyłu, jednostronnie ssący, z obudową (z kołnierzem), dmuchawa do gazowych kotłów


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V (208...240 V)	Wielkość	250 mm
Częstotliwość	50/60 Hz	Silnik	M3G084-FA
Prędkość obrotowa	4800 obr/min	Materiał wirnika	blacha aluminiowa
Pobór mocy	1150 W	Obudowa	odlew aluminiowy
Pobór prądu	5,7 @ 208 V A	Liczba łopatek	7
Wydajność	1325 m³/h	Kierunek obrotów	w prawo, patrząc na wirnik
Maks. ciśnienie statyczne	3300 Pa	Stopień ochrony	IP20
Temperatura otoczenia	-20...+60 °C	Klasa izolacji	B
Temperatura medium	0...60 °C	Zabezpieczenie silnika	ochrona przed zablokowaniem wirnika
Regulacja obrotów	0-10 V / PWM	Łożyskowanie	kulkowe
		Masa	13,2 kg

Charakterystyka przepływowa (50 Hz)

Charts: Air flow 50 Hz

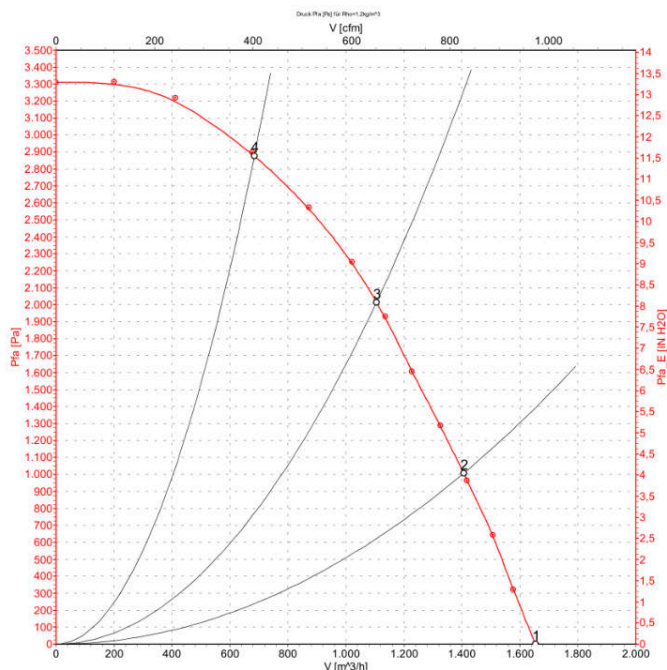

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

G3G250-GN17-01

EC centrifugal fan

backward curved, single inlet

with housing (flange), Gas blower for gas-condensing heating


ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	G3G250-GN17-01	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	[VAC]	230
Nominal voltage range	[VAC]	208 .. 240
Frequency	[Hz]	50/60
Type of data definition		ml
Speed	[min ⁻¹]	4800
Power input	[W]	1150
Current draw	[A]	5,7 @ 208 V
Min. ambient temperature	[°C]	-20
Max. ambient temperature	[°C]	60
Min. temp. of flow medium	[°C]	0
Max. temp. of flow medium	[°C]	60
Air flow	[m ³ /h]	1325
Back pressure	[Pa]	1200
Sound pressure level	[dB(A)]	86,3

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

G3G250-GN17-01

EC centrifugal fan

backward curved, single inlet

with housing (flange), Gas blower for gas-condensing heating

Technical features

Leakage current	<= 3,5 mA
Size	250 mm
Operation mode	S1
Direction of rotation	Clockwise, seen on rotor
Mounting position	Any
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-4 (industrial environment)
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
Insulation class	"B"
Condensate discharge holes	Rotor-side
Bearing motor	Ball bearing
Mass	13.2 kg
Material of protective cover	Polyflam RPP 374-ND CS1 (UL 97-V0)
Housing material	Die-cast aluminum
Material of impeller	Aluminum sheet
Motor protection	Locked-rotor protection
Surface of rotor	Coated in black
Number of blades	7
Type of protection	IP 20
Protection class	I
Technical features	- Tach output - Over-temperature protected electronics / motor - PFC, active - Motor current limit - Line undervoltage / phase failure detection - PWM control input - Control input 0-10 V
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Approval	CSA C22.2 Nr.13; UL 507


G3G250-GN17-01

EC centrifugal fan

backward curved, single inlet

with housing (flange), Gas blower for gas-condensing heating

Product drawing

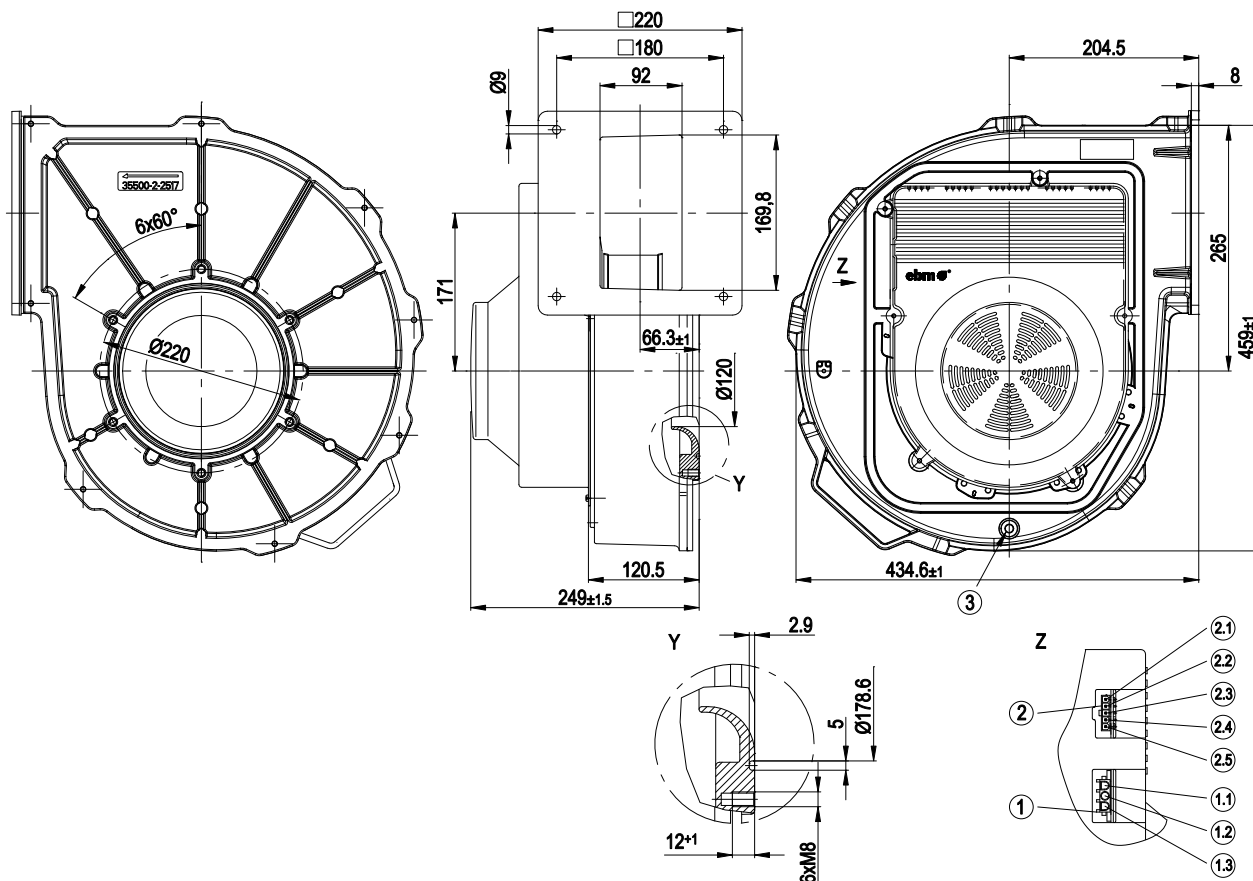

1	3-pole strip to fit mating connector (not included in standard scope of delivery) tyco No. 350766-1, female connector tyco No. 926884-1
1.1	L
1.2	N
1.3	PE
2	5-pole strip to fit mating connector (not included in standard scope of delivery) Molex No. 39-01-4050, female connector Molex No. 39-00-0059
2.1	+
2.2	Speed monitoring
2.3	0-10 VDC control input
2.4	PWM input
2.5	-
3	Pressure tap optionally available
Y	Detail Y
Z	View Z / plug assignment


G3G250-GN17-01

EC centrifugal fan

backward curved, single inlet

with housing (flange), Gas blower for gas-condensing heating

Connection screen

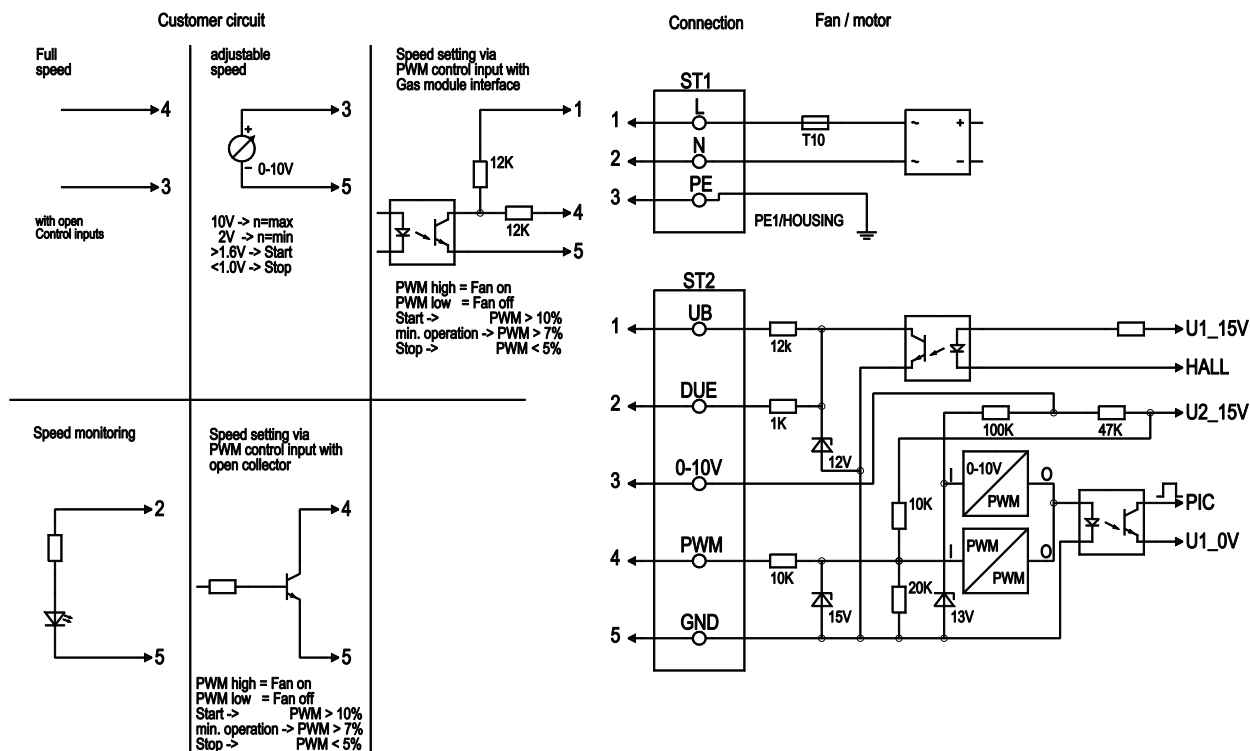


No.	Pin	Signal	Function / assignment
ST1	1; 2; 3	L; N; PE	Power supply 230 VAC, 50 - 60 Hz, phase, neutral, protective earth
St2	1	UB	External voltage 16 - 45 VDC, residual ripple +/- 3.5%, SELV
ST2	2	DUE	Speed monitoring, 3 pulses per revolution, SELV
ST2	3	0 - 10 V	Control input 0 - 10 V, impedance 100k, SELV
ST2	4	PWM	Control input PWM, 1 - 6 kHz, SELV
ST2	5	GND	GND - Connection for control interface, SELV

G3G250-GN17-01

EC centrifugal fan

backward curved, single inlet
with housing (flange), Gas blower for gas-condensing heating

Charts: Air flow 50 Hz

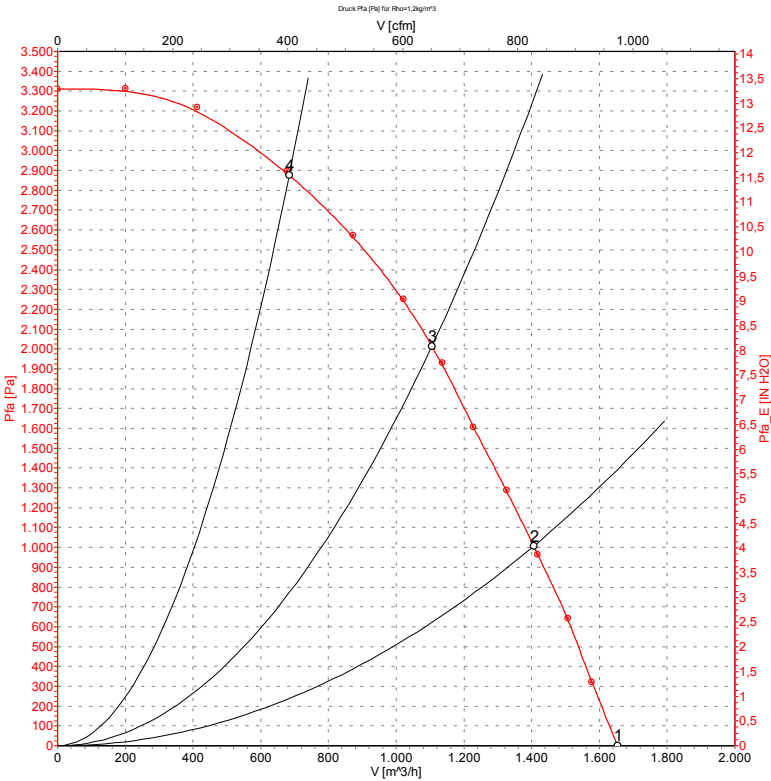

Measured values

	U	f	n	P ₁	I	LpA _{ss}	$\dot{V}$	P _{fa}
	[V]	[Hz]	[min ⁻¹]	[W]	[A]	[dB(A)]	[m³/h]	[Pa]
1	230	50	4890	1022	4.47	91	1655	0
2	230	50	4800	1150	5.00	89	1405	1000
3	230	50	4850	1117	4.87	81	1105	2000
4	230	50	5005	920	4.01	79	685	2900