

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2

D-74673 Mulfingen

Phone: +49(0)7938/81-0

Fax: +49(0)7938/81-110

info1@de.ebmpapst.comwww.ebmpapst.com**Nominal data**


Type	G4D200-CL12-01				
Motor	M4D074-EI				
Phase		1~	1~	1~	1~
Nominal voltage	[V]	230	230	400	400
Connection		D	D	Y	Y
Frequency	[Hz]	50	60	50	60
Type of data definition		rfa	ml	rfa	ml
Valid for approval / standard		CE	CE	CE	CE
Speed	[min ⁻¹]	1300	1550	1300	1550
Power input	[W]	360	340	360	340
Current draw	[A]	1.14	1.07	0.66	0.62
Min. back pressure	[Pa]	0	250	0	250
Max. ambient temperature	[°C]	45	30	45	30

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Technical features

Leakage current	< 0.75 mA
Size	200 mm
Operation mode	S1
Direction of rotation	Clockwise, seen on rotor
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Humidity class	F1-2
Insulation class	"B"
Cable exit	Axial
Condensate discharge holes	Rotor-side
Motor bearing	Ball bearing
Mass	7.4 kg
Housing material	Sendzimir galvanized sheet steel
Material of impeller	Sendzimir galvanized sheet steel
Product conforming to standard	EN 60335-1
Surface of rotor	Coated in black
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Protection class	I
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Approval	CCC

Product drawing

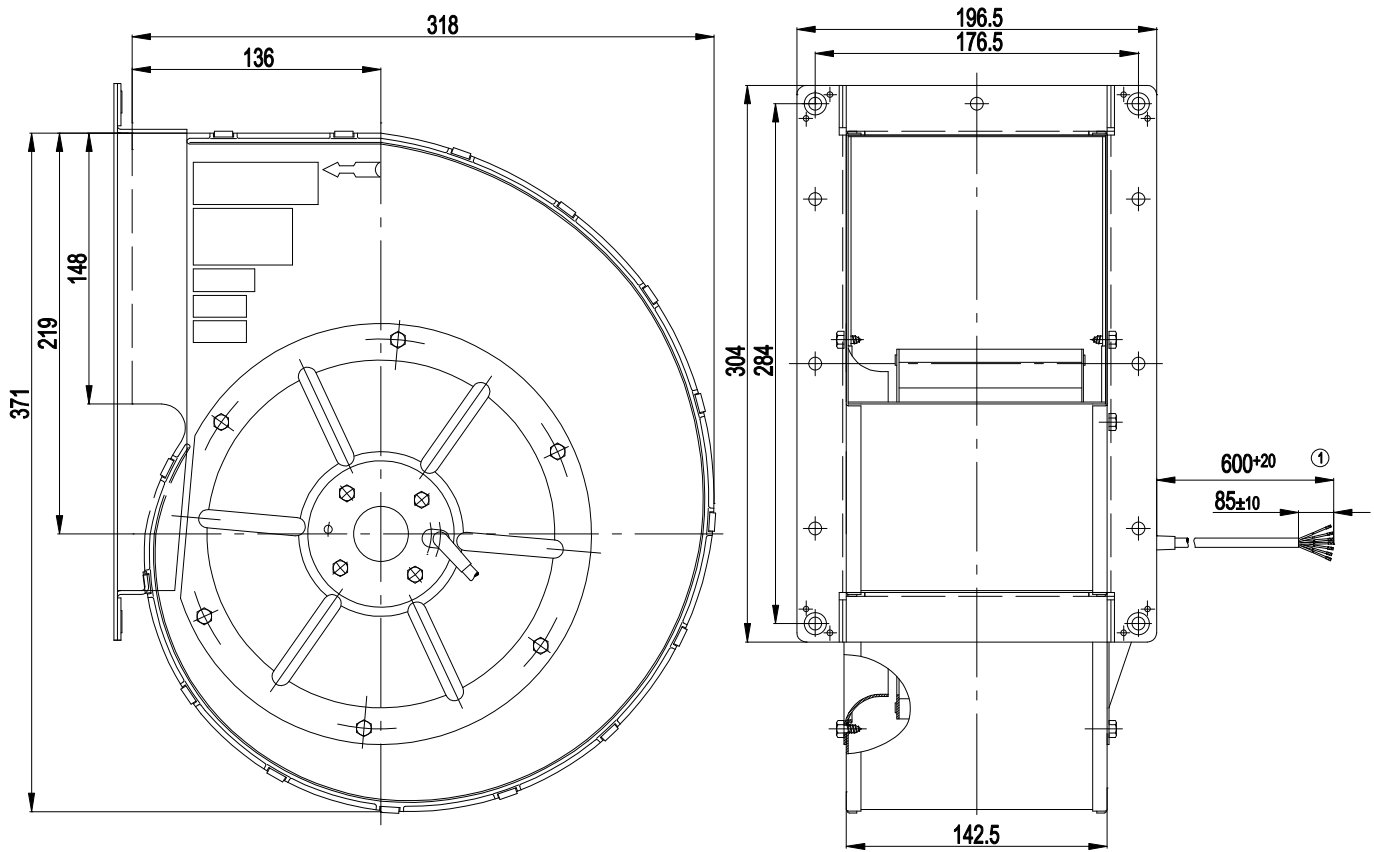


1 Connection line PVC 7G 0.5 mm², 7x brass lead tips crimped

AC centrifugal fan

forward curved, single inlet
with housing (large flange)

Connection screen

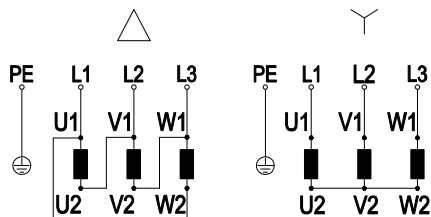


Note: Direction of rotation changes when two phases are reversed

Δ	Delta connection	Y	Star connection	L1	black
L2	blue	L3	brown	U1	black
V1	blue	W1	brown	U2	green
V2	white	W2	yellow	PE	green/yellow

AC centrifugal fan

forward curved, single inlet
with housing (large flange)

Charts: Air flow 50 Hz

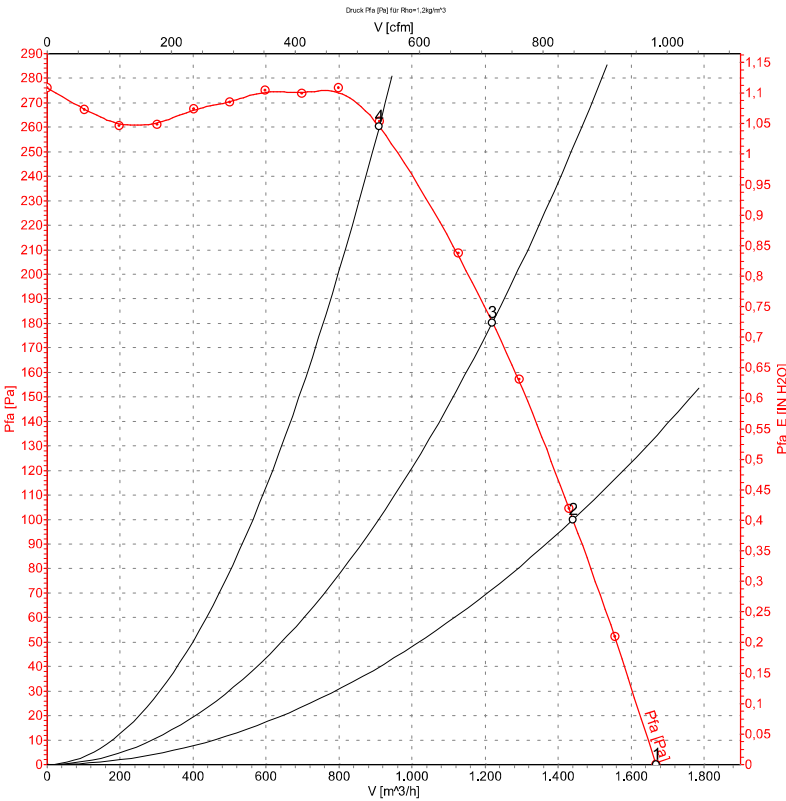

Measurement: LU-105245

Air performance measured as per ISO 5801 Installation Category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.


Measured values

	U	f	n	P ₁	I	ṽ	P _{fa}
	[V]	[Hz]	[min ⁻¹]	[W]	[A]	[m³/h]	[Pa]
1	400	50	1300	360	0.66	1670	0
2	400	50	1335	299	0.58	1440	100
3	400	50	1370	251	0.53	1220	180
4	400	50	1410	195	0.48	910	260

AC centrifugal fan

forward curved, single inlet
with housing (large flange)

Charts: Air flow 60 Hz

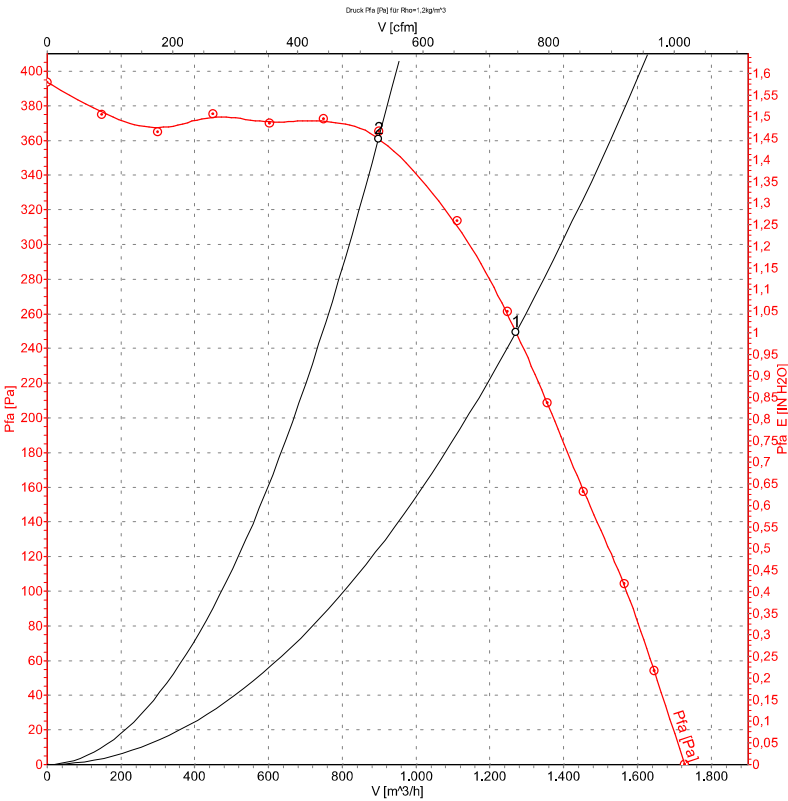

Measurement: LU-105247

Air performance measured as per ISO 5801 Installation Category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P ₁	I	Ṡ	P _{fa}
	[V]	[Hz]	[min ⁻¹]	[W]	[A]	[m³/h]	[Pa]
1	400	60	1550	340	0.62	1270	250
2	400	60	1635	239	0.45	900	365