

KARTA KATALOGOWA

G4E280-BC23-05

Wentylator promieniowy AC, łopatki zakrzywione do przodu, jednostronnie ssący, z obudową (z dużym kołnierzem)

Producent: ebm-papst



Zdjęcie poglądowe


Dane znamionowe	
Napięcie znamionowe	1~ 230 V
Częstotliwość	50 / 60 Hz
Prędkość obrotowa	1340 / 1410 obr/min
Pobór mocy	690 / 980 W
Pobór prądu	3,1 / 4,28 A
Kondensator	18,5 µF / 500 V
Maks. wydajność	1650 m³/h
Maks. ciśnienie statyczne	610 Pa
Temperatura otoczenia	-25...+45 °C

Budowa	
Wielkość	280 mm
Silnik	M4E094-HA
Materiał wirnika	blacha stalowa ocynkowana
Obudowa	blacha stalowa ocynkowana
Kierunek obrotów	w prawo, patrząc na wirnik
Stopień ochrony	IP10
Klasa izolacji	F
Zabezpieczenie silnika	termik (TOP), podłączony wewnętrznie
Łożyskowanie	kulkowe
Podłączenie	listwa zaciskowa; listwa zaciskowa, kondensator podłączony
Masa	15 kg

Dane ErP (UE 327/2011)	
Sprawność całkowita	41,4 %
Przepływ w pkt. optymalnym	1605 m³/h
Przyrost ciśnienia	574 Pa
Regulacja prędkości (ErP)	nie

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

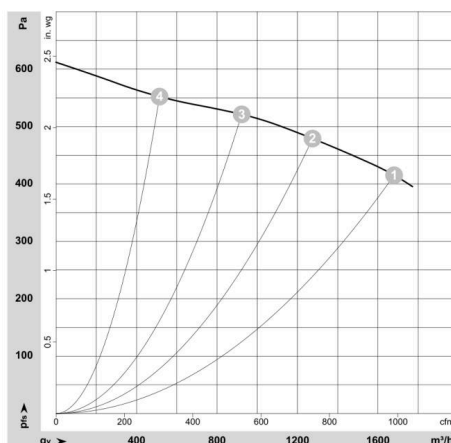

$\rho = 1,15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-75911-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

G4E280-BC23-05

AC centrifugal fan

forward-curved, single-intake

with housing (large flange)

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	G4E280-BC23-05		
Motor	M4E094-HA		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		ml	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	1340	1410
Power consumption	W	690	980
Current draw	A	3.1	4.28
Capacitor	µF	18.5	18.5
Capacitor voltage	VDB	500	500
Capacitor standard		S2 (CE)	S2 (CE)
Min. back pressure	Pa	415	470
Min. back pressure	in. wg	1.67	1.89
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	45	45

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015			
01 Overall efficiency η_e	%	41.4	41.4	09 Power consumption P_e	kW	0.63
02 Measurement category		B		09 Air flow q_v	m³/h	1605
03 Efficiency category		Total		09 Pressure increase p_f	Pa	574
04 Efficiency grade N		49	49	10 Speed (rpm) n	min ⁻¹	1345
05 Variable speed drive		No		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_f / 100\,000\text{ Pa}$ LU-143275



G4E280-BC23-05

AC centrifugal fan

forward-curved, single-intake
with housing (large flange)


Technical description

Weight	15 kg
Size	280 mm
Motor size	94
Rotor surface	Painted black
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP10
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal strip; Via terminal strip, capacitor connected
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-1 in safety protection class	S2
Conformity with standards	CE
Approval	CSA C22.2 No. 100; CCC; UL 1004-1; EAC

G4E280-BC23-05


AC centrifugal fan
forward-curved, single-intake
with housing (large flange)

Product drawing

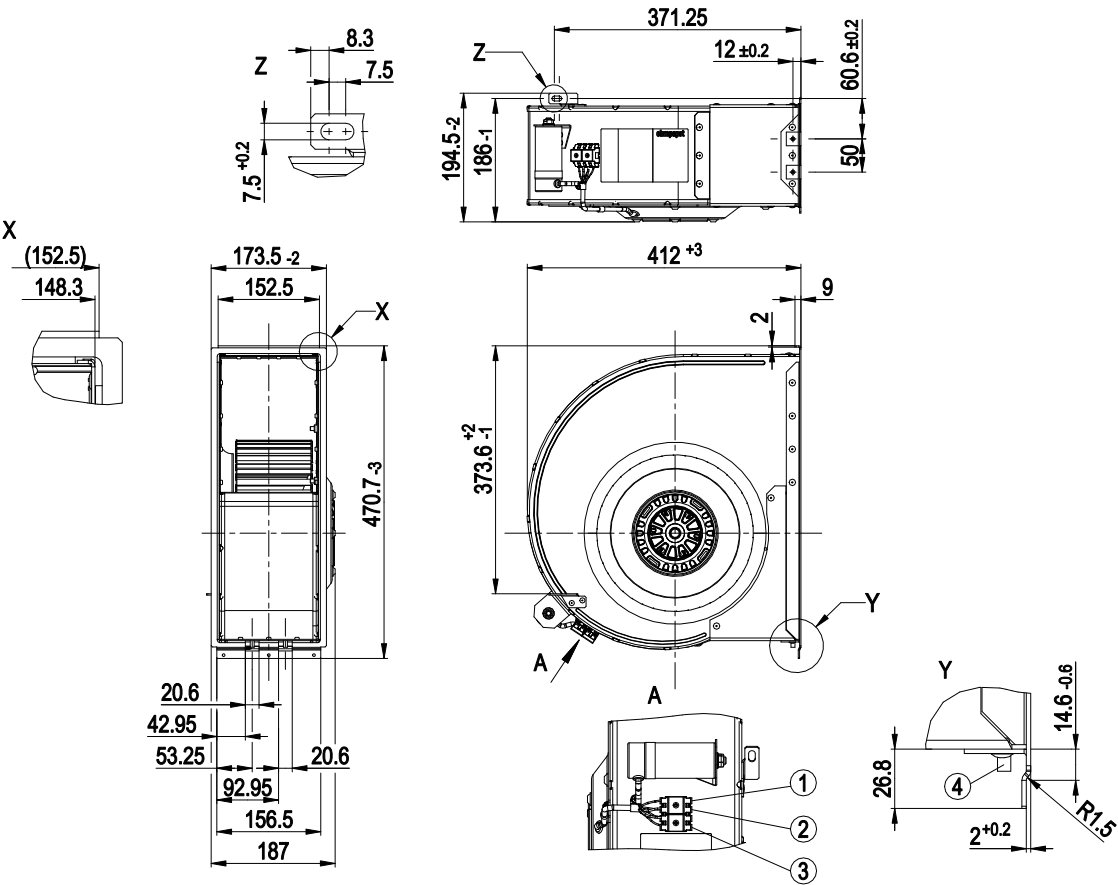

1	PE
2	N
3	L
4	Press-in threaded pin M6x12 (2x)

Connection diagram



L	= U1 = blue	Z	brown	N	= U2 = black
PE	green/yellow				



G4E280-BC23-05

AC centrifugal fan

forward-curved, single-intake
with housing (large flange)

Nameplate

ebm papst

SIEMENS Made in Germany

G4E280-BC23-05



A5E01026230



MLFB 6SL3362-0AG00-0AA1



00021-VV/YY



230V~ 50/60Hz 3.1/4.28A 690/980W 1340/1410min⁻¹

(P2)18.5μF 500VDB TOP Ins.Cl.F IP 10

η =41.4% (B, total) N49 N=49



M4E094-HA
230V~ 60Hz AO





YYWW000000

WARNING
BEWARE OF ROTATING FAN BLADES


ATTENTION
FAN CAN SELF-DEPENDENT RESTART

WARNUNG
NICHT HINEINGREIFEN
GEFAHR DER VERLETZUNG DURCH
ROTIERENDE VENTILATORBLÄTTER

ACHTUNG
LÜFTER KANN EIGENSTÄNDIG ANLAUFEN



Einphasen-Wechselstrommotor mit Betriebskondensator
Singlephase AC motor with capacitor

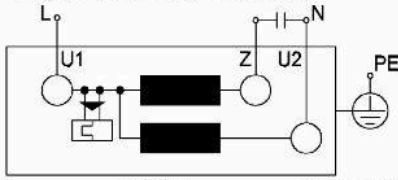

U1: blau
U1: blue


Z: braun
Z: brown

U2: schwarz
U2: black

G4E280-BC23-05

AC centrifugal fan
forward-curved, single-intake
with housing (large flange)

Curves: Air performance 50 Hz

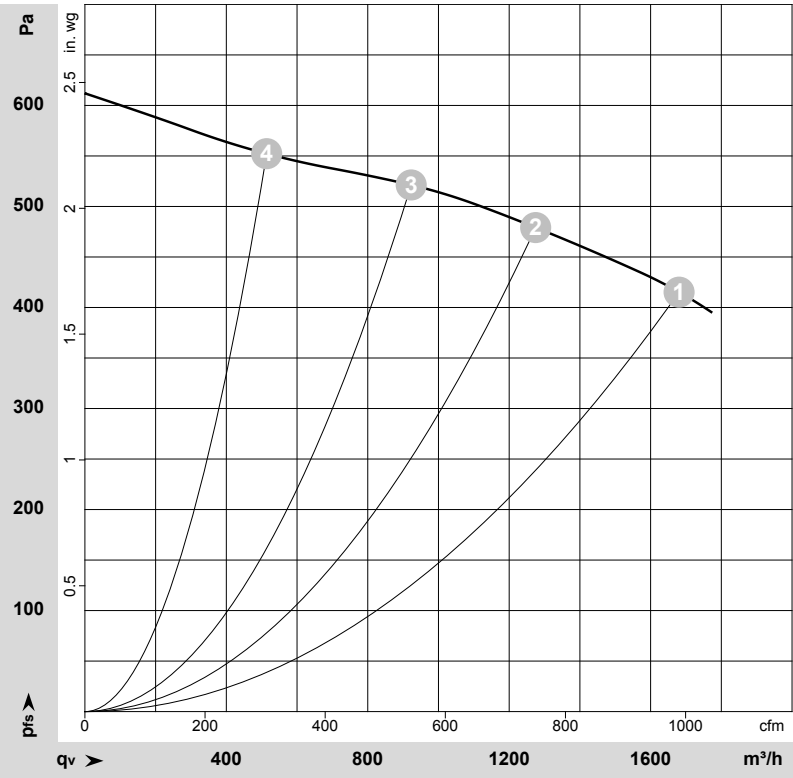

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-75911-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	P _f	q _v	P _f
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	1~	230	50	1340	690	3.10	1680	415	990	1.67
2	1~	230	50	1390	541	2.42	1275	480	750	1.93
3	1~	230	50	1415	471	2.14	925	520	545	2.09
4	1~	230	50	1435	412	1.92	515	550	305	2.21


Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · P_f = Pressure increase



G4E280-BC23-05

AC centrifugal fan
forward-curved, single-intake
with housing (large flange)

Curves: Air performance 60 Hz

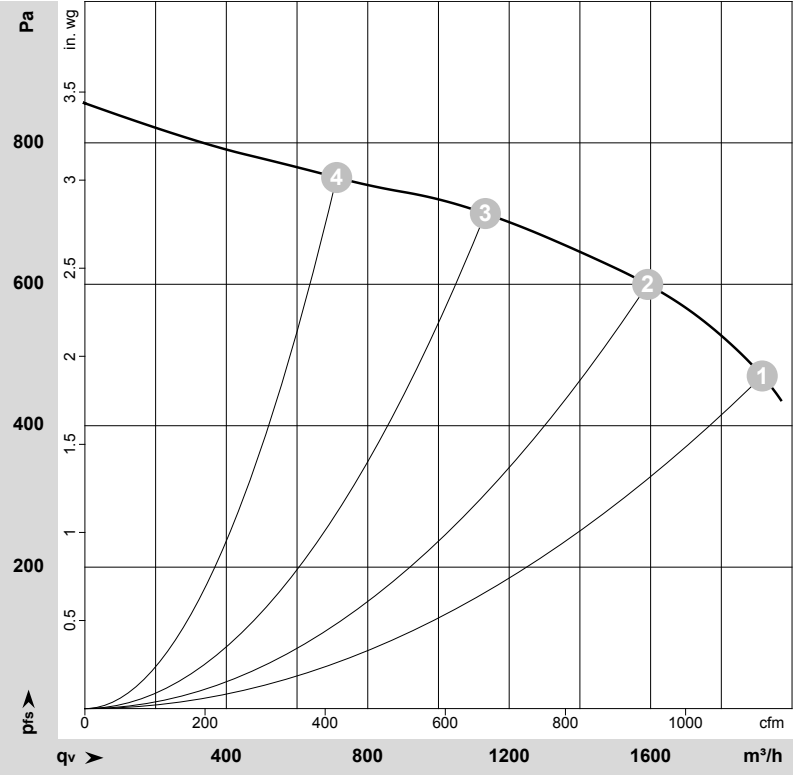

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-75912-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	1~	230	60	1410	980	4.28	1915	470	1130	1.89
2	1~	230	60	1570	875	3.84	1590	600	935	2.41
3	1~	230	60	1640	770	3.44	1135	700	665	2.81
4	1~	230	60	1680	680	3.09	710	750	420	3.01

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

