

KARTA KATALOGOWA

K2E250-AH34-06


Moduł promieniowy AC RadiPac, łopatki zakrzywione do tyłu, jednostronnie ssący

Producent: ebm-papst

Dane znamionowe		Budowa	
Napięcie znamionowe	1~ 230 V	Średnica wirnika	250 mm
Częstotliwość	50/60 Hz	Materiał wirnika	tworzywo PA
Prędkość obrotowa	2550 / 2600 obr/min	Liczba łopatek	5
Pobór mocy	95 / 135 W	Stopień ochrony	IP44
Pobór prądu	0,43 / 0,6 A	Klasa izolacji	B
Kondensator	2 µF / 400 V	Zabezpieczenie silnika	termik (TOP)
Temperatura otoczenia	-30...+55 °C	Masa	3,1 kg

Charakterystyka przepływowa (50 Hz)

Curves: Air performance 50 Hz

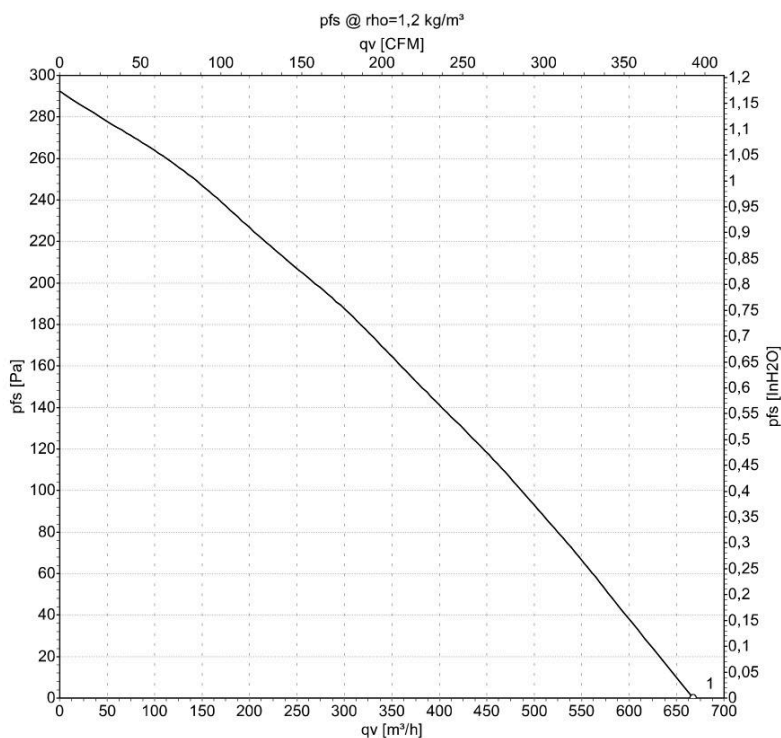

Measurement: LU-133033-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na podstawie karty producenta ebm-papst (oryginał na kolejnych stronach).
Wartości dla 50 Hz / 60 Hz; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

K2E250-AH34-06

AC diagonal module

backward-curved, single-intake

with housing

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	K2E250-AH34-06			
Motor	M2E068-DF			
Phase		1~	1~	1~
Nominal voltage	VAC	230	230	230
Frequency	Hz	50	60	60
Method of obtaining data		ce	ce	ce
Valid for approval/standard		CE	CE	UL 2111
Speed (rpm)	min ⁻¹	2550	2600	2750
Power consumption	W	95	135	140
Current draw	A	0.43	0.60	0.60
Capacitor	µF	2	2	2
Capacitor voltage	VDB	400	400	400
Capacitor standard		S0 (CE)	S0 (CE)	UL
Min. back pressure	Pa	0	0	0
Min. back pressure	in. wg	0	0	0
Min. ambient temperature	°C	-30	-30	-30
Max. ambient temperature	°C	55	55	55
Starting current	A	0.8	0.75	0.75

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



K2E250-AH34-06

AC diagonal module

backward-curved, single-intake
with housing

Technical description

Weight	3.1 kg
Size	250 mm
Motor size	68
Rotor surface	Unpainted
Impeller material	PA plastic
Housing material	PP plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Terminal strip; Via terminals, capacitor connected
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Motor capacitor according to EN 60252-1 in safety protection class	S0
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 77; CCC; UL 1004-3




K2E250-AH34-06

AC diagonal module


 backward-curved, single-intake
with housing

Product drawing

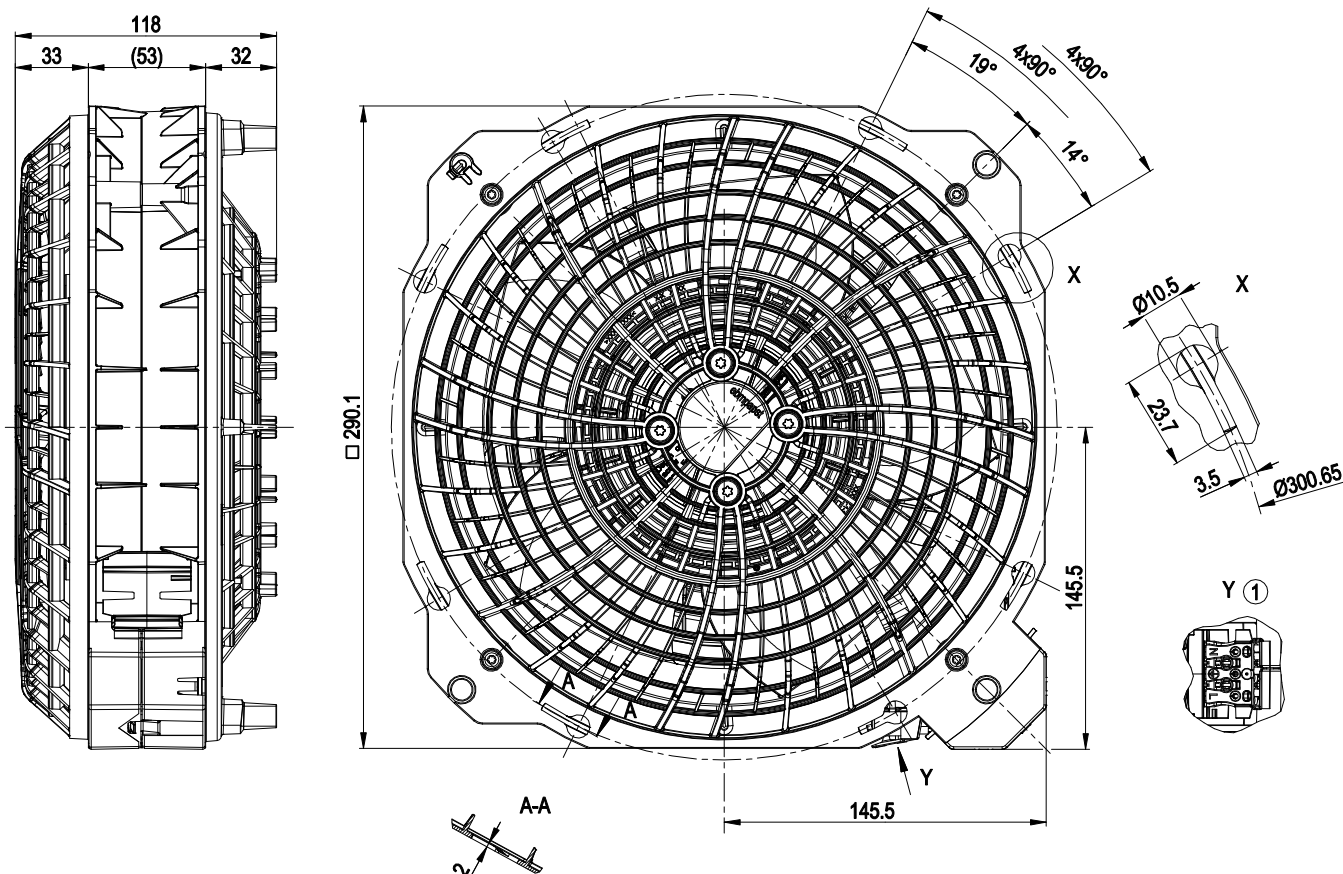

1 Terminal strip Adels Contact LK 980-01 RZ/ 3 B V0

Connection diagram



L blue

N black

PE green/yellow




K2E250-AH34-06

AC diagonal module

backward-curved, single-intake

with housing

Curves: Air performance 50 Hz

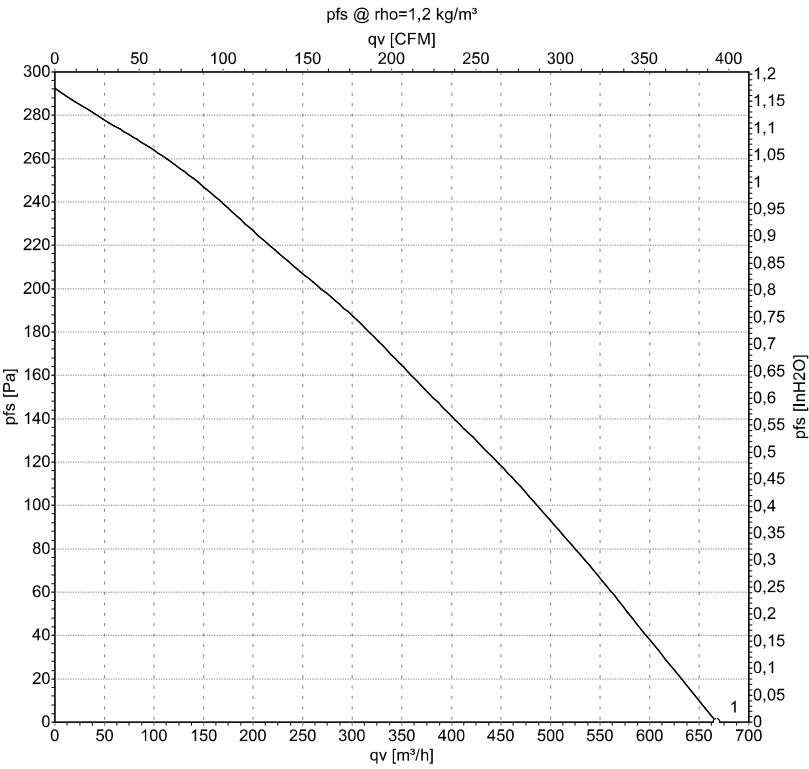

Measurement: LU-133033-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	cfm	in. wg
1	230	50	2550	95	0.43	670	395	0.00

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow




K2E250-AH34-06

AC diagonal module

backward-curved, single-intake

with housing

Curves: Air performance 60 Hz

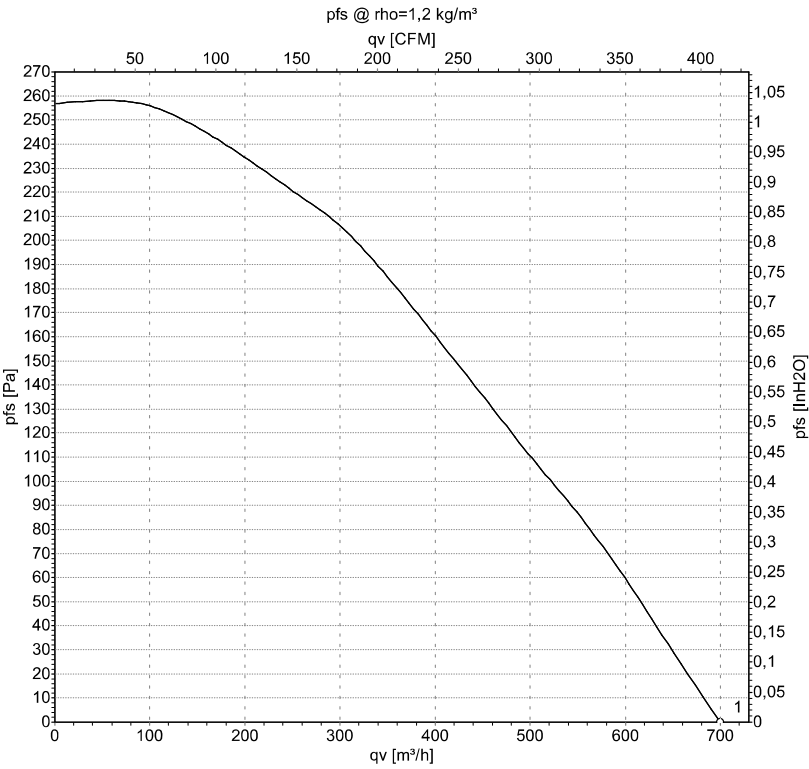

Measurement: LU-133035-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	cfm	in. wg
1	230	60	2600	135	0.60	700	410	0.00

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow

