

KARTA KATALOGOWA

K3G097-AP46-01

Wentylator promieniowy podwójny EC, łopatki zakrzywione do przodu, z bezzszczotkowym silnikiem DC, z obudową, wykonanie motoryzacyjne


Producent: ebm-papst



Dane znamionowe		Budowa	
Napięcie znamionowe	26 V DC (16...32 V DC)	Wielkość	97 mm
Prędkość obrotowa	3500 obr/min	Silnik	M3G084-BF
Pobór mocy	320 W	Materiał wirnika	tworzywo PA
Pobór prądu	12,2 A	Obudowa	tworzywo PP
Temperatura otoczenia	-40...+85 °C	Kierunek obrotów	w prawo, patrząc na wirnik
Regulacja obrotów	0-10 V / PWM	Stopień ochrony	silnik IP24 KM, elektronika IP6K9K (z podłączonym złączem)
		Klasa izolacji	B
		Łożyskowanie	kulkowe, uszczelnione
		Podłączenie	wtyczka
		Masa	1,96 kg

Charakterystyka przepływowa

Curves: Air performance

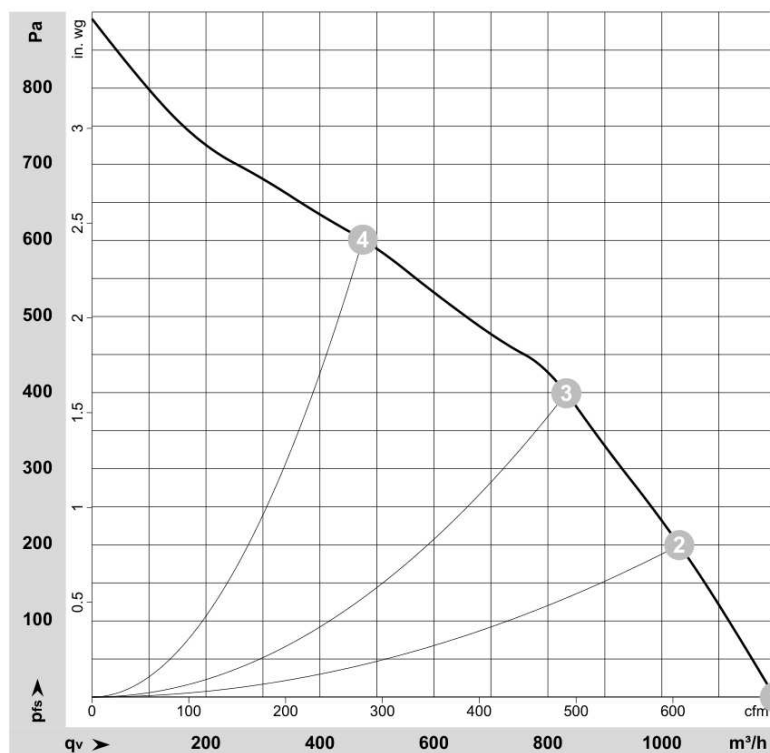

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-201080-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).

Wartości przy swobodnym wydychu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199

biuro@luftberg.pl · www.luftberg.pl

K3G097-AP46-01

EC dual centrifugal fan

forward-curved, with brushless DC motor
with housing, Automotive


ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	K3G097-AP46-01	
Motor	M3G084-BF	
Nominal voltage	VDC	26
Nominal voltage range	VDC	16 .. 32
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	3500
Power consumption	W	320
Current draw	A	12.2
Min. back pressure	Pa	0
Min. back pressure	in. wg	0
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	85

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

K3G097-AP46-01

EC dual centrifugal fan

forward-curved, with brushless DC motor
with housing, Automotive

Technical description


Weight	1.96 kg
Size	97 mm
Motor size	84
Impeller material	PA plastic
Housing material	PP plastic
Balancing grade according to DIN ISO 21940-11	G 2.5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Motor IP24 KM, electronics IP6K9K (mating connector installed)
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H4
Max. permitted ambient temp. for motor (transport/storage)	+85 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing; (sealed)
Life expectancy	40,000 h (depending on load profile and ambient conditions)
Technical features	- Locked-rotor detection - Error output (high-side switch) - Power limiter - Load dump protection - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Temperature derating - Thermal overload protection for electronics - Reverse polarity protection
EMC regulations	According to ECE R10 Rev.6
Electrical hookup	Plug; Standby current less than 500 µA
Protection class assignment	III; Requires supply with safety extra-low voltage SELV. This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Approval	E1; EAC
Comment	Type approval number – 069400

K3G097-AP46-01

EC dual centrifugal fan

forward-curved, with brushless DC motor
with housing, Automotive

Product drawing

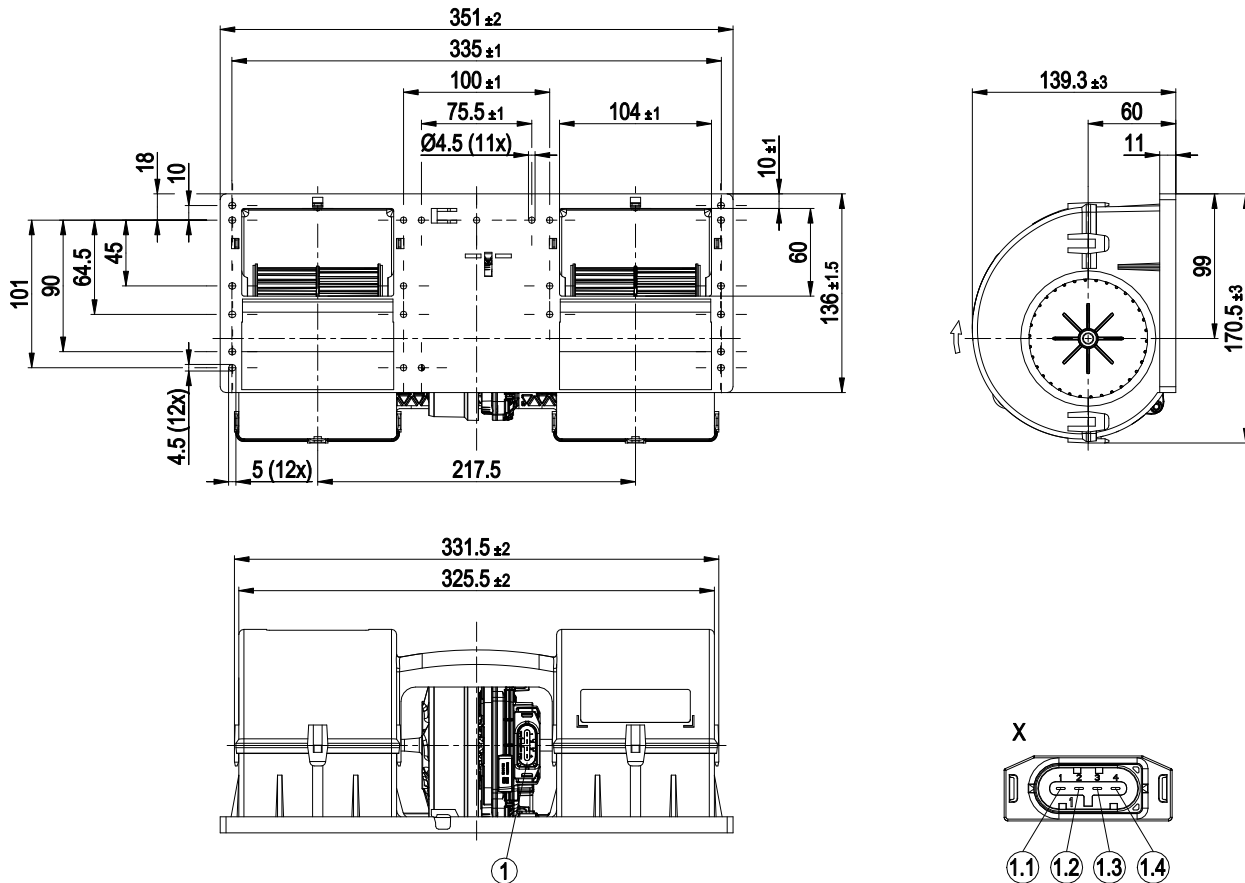

1 4-pole plug, pluggable with cable from accessories

1.1 Diagnostic output

1.2 PWM/LIN

1.3 + UB

1.4 GND

Accessory part: Cable (460 mm) with mating connector, part no. 02040-4-1021 not included in scope of delivery


4-pole mating connector TE 1-1718628-1, 2x plug contact TE 1-968857-1, 2x plug contact TE 1-968855-1,

2x seal TE 828905-1, 2x seal TE 828904-1

K3G097-AP46-01

EC dual centrifugal fan
forward-curved, with brushless DC motor
with housing, Automotive

Connection diagram

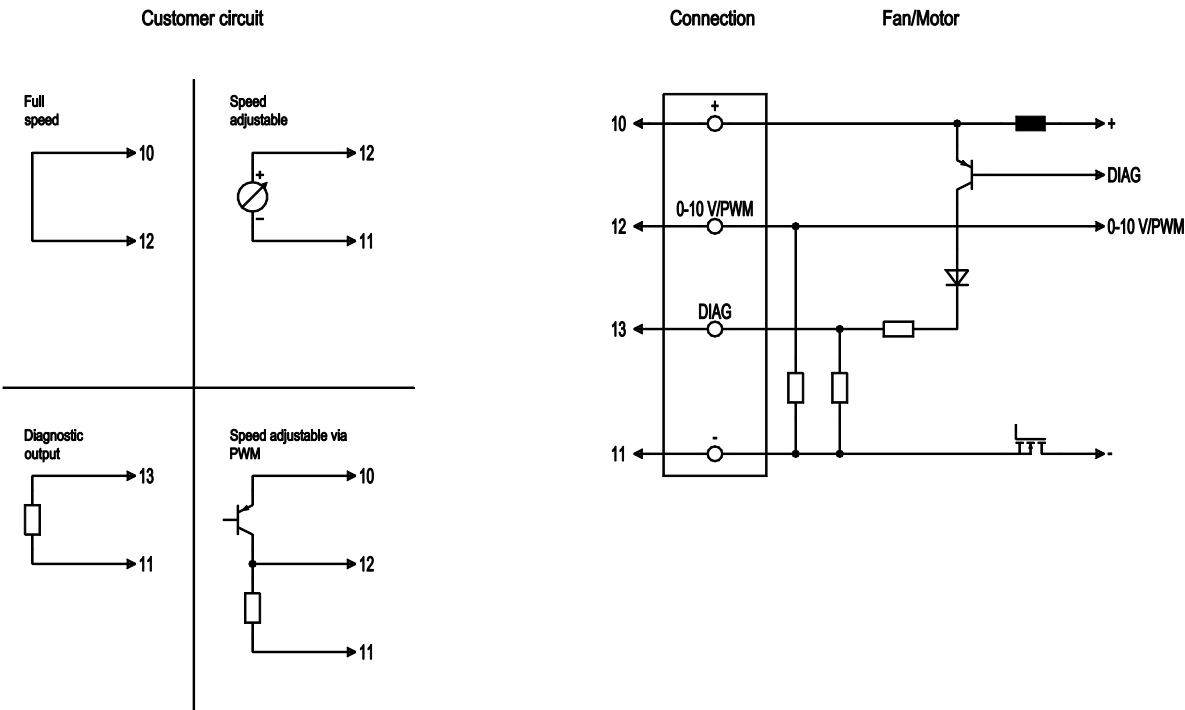

No.	Conn.	Designation	Function/assignment
10	1.3	+	Power supply +
11	1.4	-	Power supply -
12	1.2	0-10 V / PWM	Control input: $R_i > 27\text{ k}\Omega$ 0-10 V: (typ. $< 0.5\text{ V} \rightarrow$ standby; $1.5\text{ V} \rightarrow n = \text{min.}$; $> 9.5\text{ V} \rightarrow n = \text{max.}$) or PWM: (12 V - U_b ; 1 kHz - 10 kHz; typ. $< 1\% \rightarrow$ standby; $10\% \rightarrow n = \text{min.}$; $> 95\% \rightarrow n = \text{max.}$)
13	1.1	DIAG	Diagnostic output: Open Collector, $I_{\text{source max}} = 10\text{ mA}$, $R_{\text{source}} = 2\text{ k}\Omega$; $R_{\text{sink}} = 100\text{ k}\Omega$ fan OK $\rightarrow$ low; fan error $\rightarrow$ high




K3G097-AP46-01

EC dual centrifugal fan

forward-curved, with brushless DC motor

with housing, Automotive

Curves: Air performance

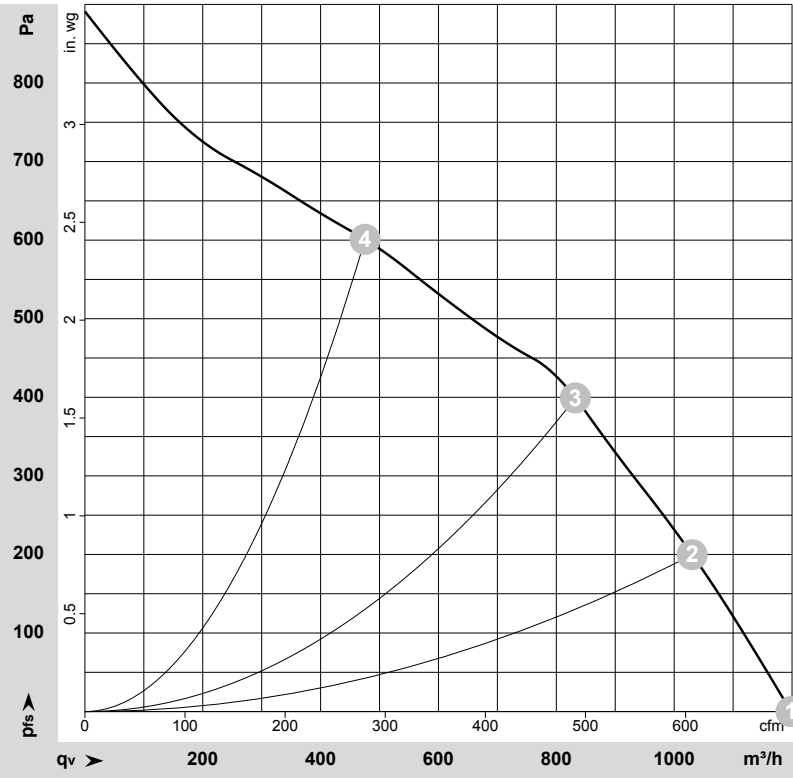

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-201080-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	26	3500	320	12.20	70	81	1200	0	705	0.00
2	26	3780	284	10.90	68	78	1030	200	605	0.80
3	26	4100	246	9.43	66	77	830	400	490	1.61
4	26	4630	183	7.03	67	77	475	600	280	2.41

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side · q_v = Air flow
p_{fs} = Pressure increase

