

KARTA KATALOGOWA

K3G500-AP28-K1

Moduł wentylatora promieniowego EC RadiPac, łopatki zakrzywione do tyłu, jednostronnie ssący, z obudową

Producent: ebm-papst



Zdjęcie poglądowe

Dane znamionowe		Budowa	
Napięcie znamionowe	3~ 400 V (380...480 V)	Wielkość	500 mm
Częstotliwość	50/60 Hz	Silnik	M3G150-FF
Prędkość obrotowa	1780 obr/min	Materiał wirnika	blacha aluminiowa
Pobór mocy	3000 W	Obudowa	blacha stalowa malowana na czarno
Pobór prądu	4,6 A	Liczba łopatek	7
Maks. wydajność	11550 m³/h	Kierunek obrotów	w prawo, patrząc na wał
Maks. ciśnienie statyczne	1105 Pa	Stopień ochrony	IP54
Temperatura otoczenia	-40...+55 °C	Klasa izolacji	F
Regulacja obrotów	0-10 V / PWM, MODBUS RTU	Zabezpieczenie silnika	ochrona przed odwrotną polaryzacją i zablokowaniem wirnika
		Łożyskowanie	kulkowe
		Podłączenie	skrzynka zaciskowa
		Masa	55,7 kg

Dane ErP (UE 327/2011)	
Sprawność całkowita	63,5 %
Przepływ w pkt. optymalnym	8085 m³/h
Przyrost ciśnienia	803 Pa
Regulacja prędkości (ErP)	tak

Charakterystyka przepływowa (50 Hz)



Dane na okładce wg karty katalogowej producenta ebm-papst (oryginał na kolejnych stronach).
Wartości przy maksymalnym obciążeniu; producent zastrzega możliwość zmian.

Dobór, wycena i dostawa – zapytaj LUFTBERG

tel. +48 600 100 371 · tel. +48 604 959 199
biuro@luftberg.pl · www.luftberg.pl

K3G500-AP28-K1

EC centrifugal module - RadiPac

backward-curved, single-intake
with housing

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Nominal data

Type	K3G500-AP28-K1	
Motor	M3G150-FF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1780
Power consumption	W	3000
Current draw	A	4.6
Min. back pressure	Pa	200
Min. back pressure	in. wg	0.8
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	63.5	56.5	09 Power consumption P_{ed}	kW	2.98
02 Measurement category		A		09 Air flow q_v	m³/h	8085
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	803
04 Efficiency grade N		69	62	10 Speed (rpm) n	min ⁻¹	1780
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$ LU-197532



K3G500-AP28-K1

EC centrifugal module - RadiPac

backward-curved, single-intake

with housing

Technical description


Weight	55.7 kg
Size	500 mm
Motor size	150
Impeller material	Sheet aluminum
Housing material	Sheet steel, painted black
Support plate material	Sheet steel, galvanized
Spacer material	Aluminum
Inlet nozzle material	Sheet steel, galvanized
Number of blades	7
Direction of rotation	Clockwise, viewed toward shaft
Degree of protection	IP54
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - External 24 V input (parameter setting) - Alarm relay - Integrated PID controller - Power limiter - Motor current limitation - PFC, passive - RS-485 MODBUS-RTU - Soft start - EEPROM write cycles: 100,000 maximum - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; EN 61800-5-1; CE
Approval	EAC

K3G500-AP28-K1

EC centrifugal module - RadiPac

 backward-curved, single-intake
with housing

Product drawing

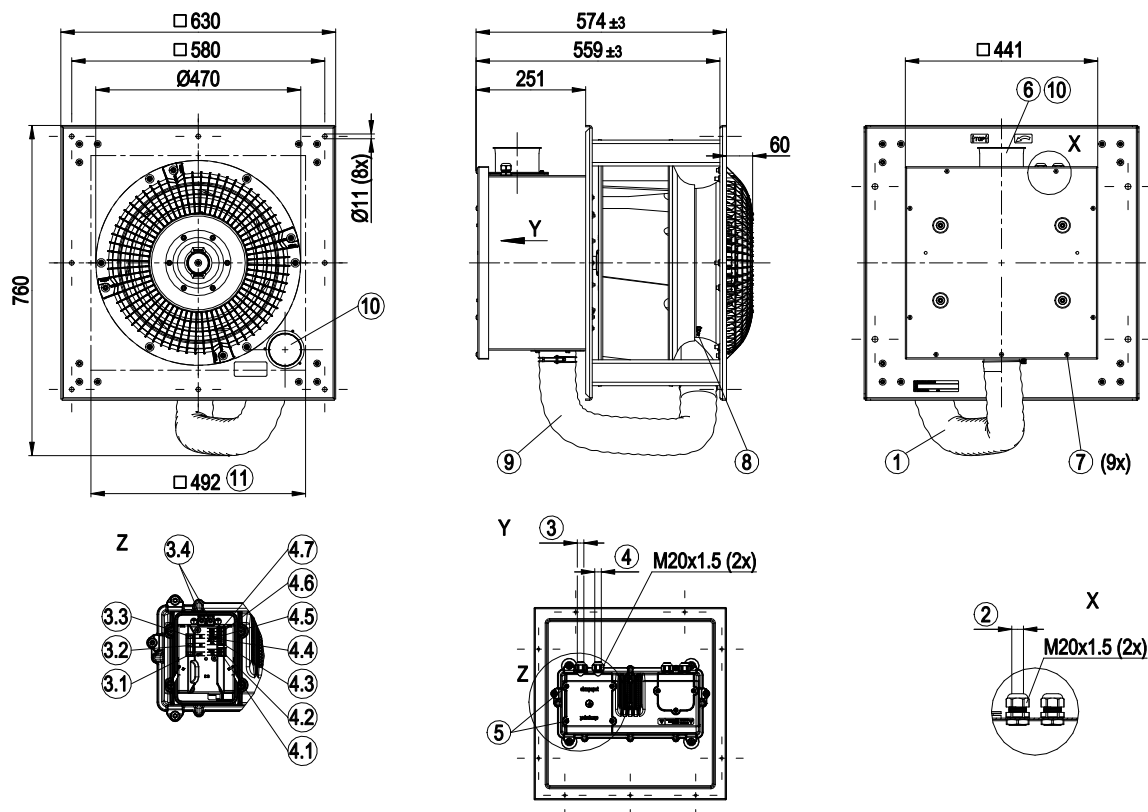


Y	Housing opened
1	Installation position: Shaft horizontal (only fit air hose at bottom as illustrated) or rotor on bottom
2	Cable diameter min. 8 mm, max. 12 mm, tightening torque 2.5 ± 0.4 Nm
3	Cable diameter min. 8 mm, max. 12 mm, tightening torque 1.8 ± 0.3 Nm
3.1	L1
3.2	L2
3.3	L3
3.4	PE
4	Cable diameter min. 8 mm, max. 12 mm, tightening torque 1.8 ± 0.3 Nm
4.1	NC
4.2	COM
4.3	+10 V
4.4	0-10 V
4.5	GND
4.6	RSA
4.7	RSB
5	Tightening torque 3 ± 0.5 Nm
6	Customer ventilation port DN 100
7	Tightening torque 3.5 ± 0.5 Nm
8	Inlet ring with pressure tap (k-factor: 281)
9	Spiral hose dia. 80 mm, PVC – coated polyester fabric (self-extinguishing)
10	Remove caps prior to start-up
11	Installation aperture

K3G500-AP28-K1

EC centrifugal module - RadiPac

backward-curved, single-intake
with housing

Connection diagram

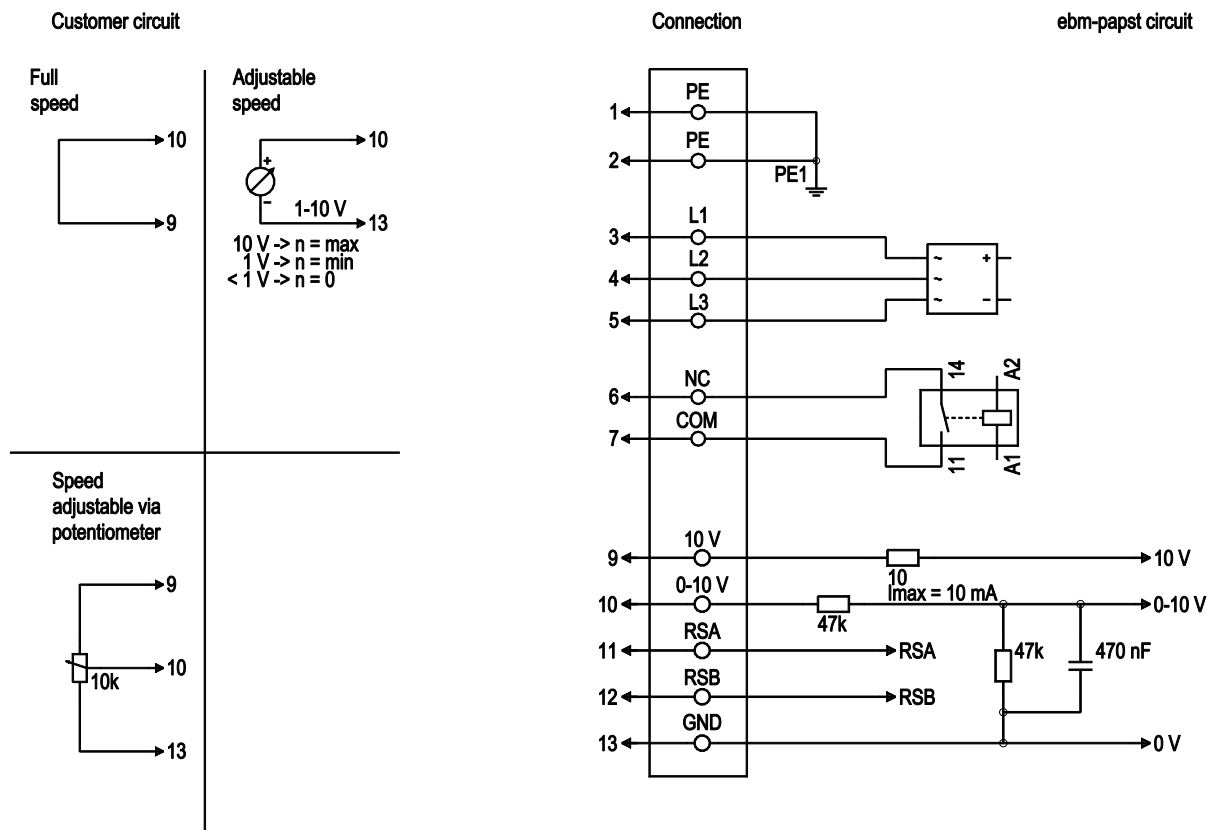

No.	Conn.	Designation	Color	Function/assignment
1	1, 2	PE	green/yellow	Protective earth
1	3, 4, 5	L1, L2, L3	black	Power supply 50 / 60 Hz
1	6	NC	white 1	Status relay, floating status contact, break for failure; contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and basic insulation on control interface side (or reinforced insulation on control interface side up to 250 VAC potential difference)
1	7	COM	white 2	Status relay, floating status contact, break for failure; contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and basic insulation on control interface side (or reinforced insulation on control interface side up to 250 VAC potential difference)
2	9	+10 V	red	Fixed voltage output 10 VDC, SELV, +10 V $\pm 3\%$, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot); fixed voltage input 24 VDC for setting parameters via MODBUS without line voltage supply
2	10	0-10 V	yellow	Analog input (set value) SELV, 0-10 V, Ri = 100 k Ω , adjustable curve
2	11	RSA	white	RS485 interface for MODBUS, RSA; SELV
2	12	RSB	brown	RS485 interface for MODBUS, RSB; SELV
2	13	GND	blue	Reference ground for control interface, SELV


K3G500-AP28-K1

EC centrifugal module - RadiPac

backward-curved, single-intake

with housing

Curves: Air performance 50 Hz

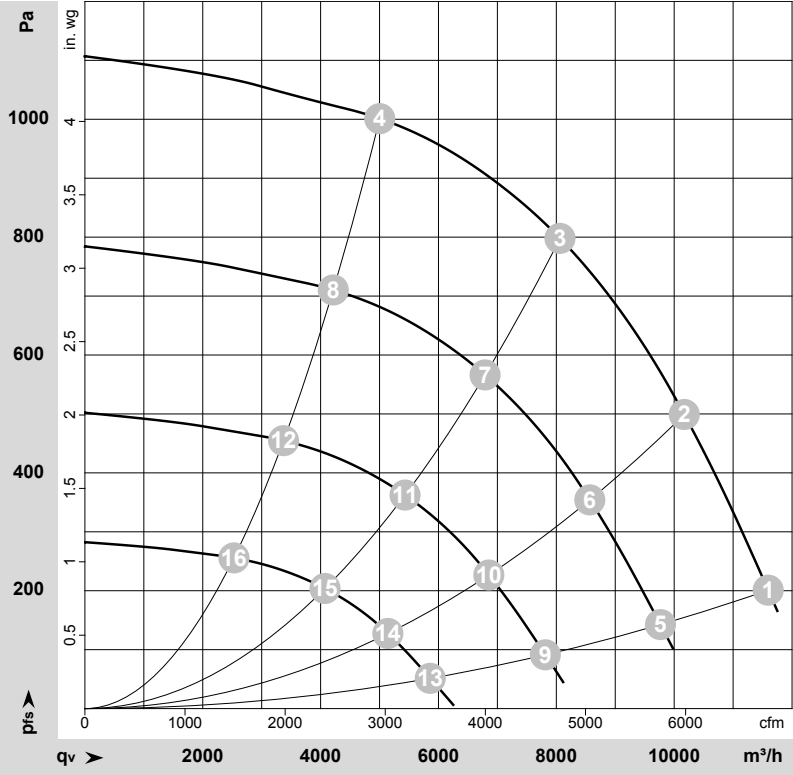

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-197532-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	3~	400	50	1780	2160	3.37	82	89	93	11595	200	6825	0.80
2	3~	400	50	1780	2638	4.08	78	86	89	10170	500	5985	2.01
3	3~	400	50	1780	3000	4.60	76	84	87	8060	800	4745	3.21
4	3~	400	50	1780	2681	4.14	76	84	88	5005	1000	2945	4.01
5	3~	400	50	1500	1290	2.02	78	85	88	9765	144	5750	0.58
6	3~	400	50	1500	1577	2.44	73	82	85	8570	355	5045	1.43
7	3~	400	50	1500	1780	2.74	72	80	83	6790	571	3995	2.29
8	3~	400	50	1500	1602	2.48	72	80	84	4215	712	2480	2.86
9	3~	400	50	1200	661	1.03	72	79	83	7815	92	4600	0.37
10	3~	400	50	1200	807	1.25	68	76	79	6855	227	4035	0.91
11	3~	400	50	1200	912	1.40	66	74	77	5435	365	3200	1.47
12	3~	400	50	1200	820	1.27	66	74	78	3370	456	1985	1.83
13	3~	400	50	900	279	0.44	65	72	76	5860	52	3450	0.21
14	3~	400	50	900	341	0.53	61	69	72	5140	128	3025	0.51
15	3~	400	50	900	385	0.59	59	67	70	4075	206	2400	0.83
16	3~	400	50	900	346	0.53	59	67	71	2530	256	1490	1.03

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase

