


Research Data

Air-flow rate[m ³ /h]	707.5
Pressure[Pa]	348.7
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV202ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	14
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	0.18
IP	55
INS	



MTCV202ATEX

Pe-el antistatic moulded housing - PP moulded impeller - stainless steel screws

Certificazioni





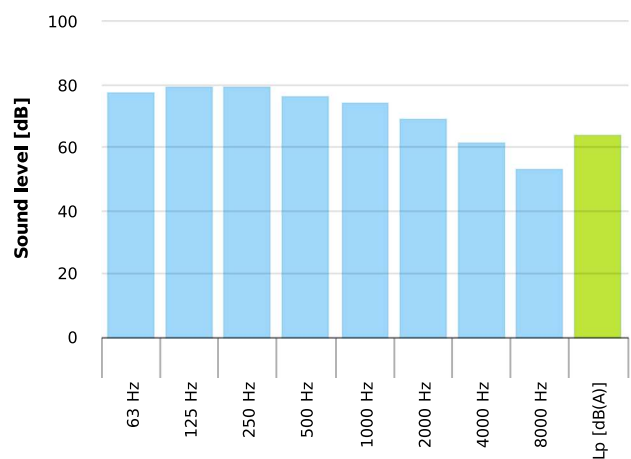


Table engines


Class IE	IE1
Size	63
Power[kW]	0.18
Current[A]	0.55
Voltage[V]	400
Cos φ	0.75
n	0.63

Working point

Q [m ³ /h]	707.5
P _{sta} [Pa]	348.7
P _{tot} [Pa]	363.4
P _{in} [kW] [W]	87.69
n _{sta}	0.782
n _{tot}	0.814
Rpm	2850

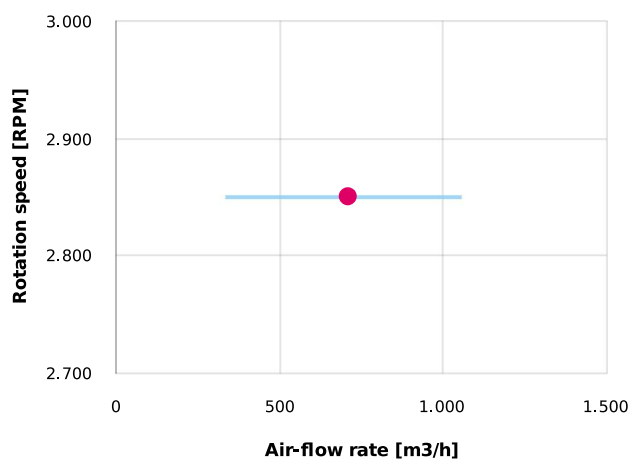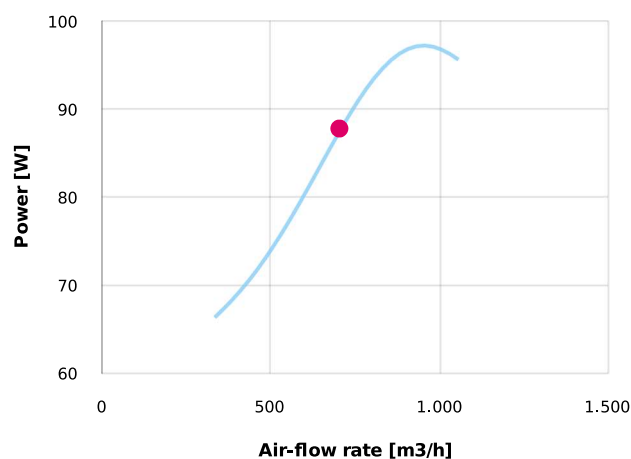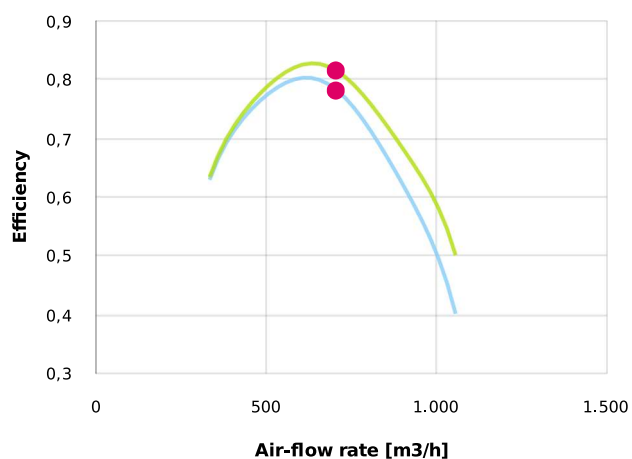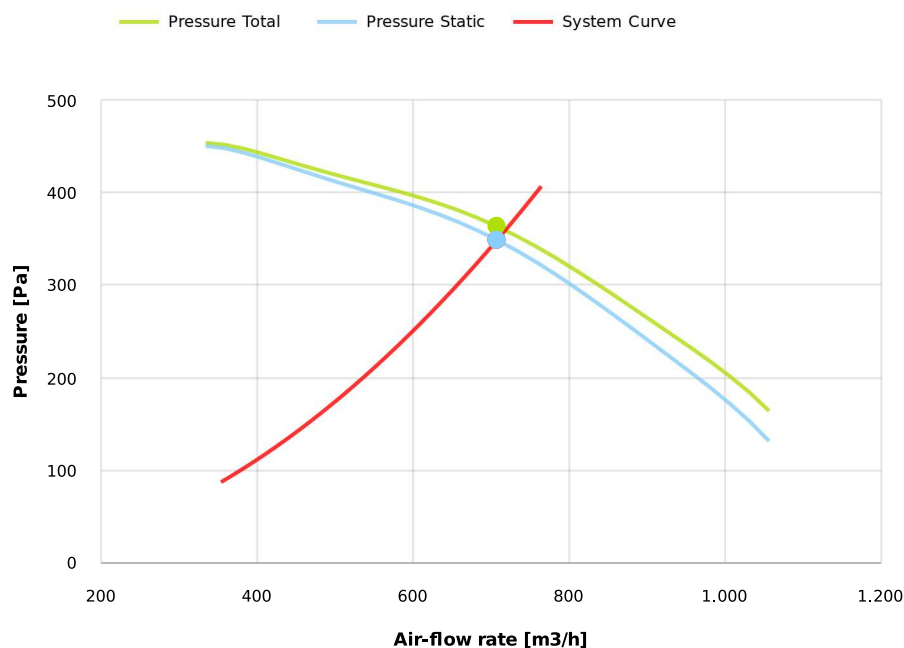

Dimensions

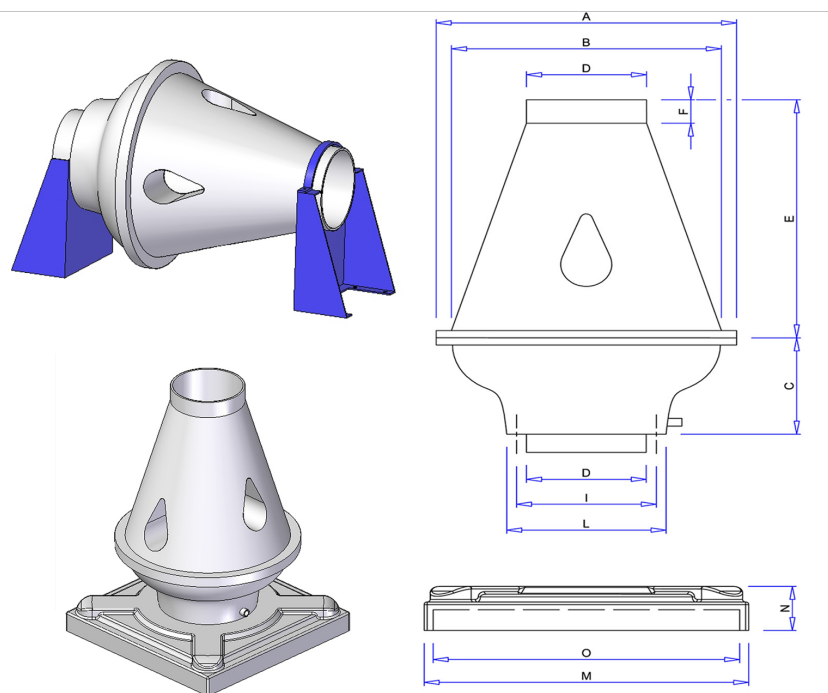

A	B	C	D	E	F	I	L	M	N	N°	O
400	350	145	160	420	40	200	240	540	80	6	490

Configurations & cad

LG 0°

