


Research Data

Air-flow rate[m ³ /h]	1409
Pressure[Pa]	495
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV252ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	16
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	0.37
IP	55
INS	



MTCV252ATEX

Pe-el antistatic moulded housing - PP moulded impeller - stainless steel screws

Certificazioni





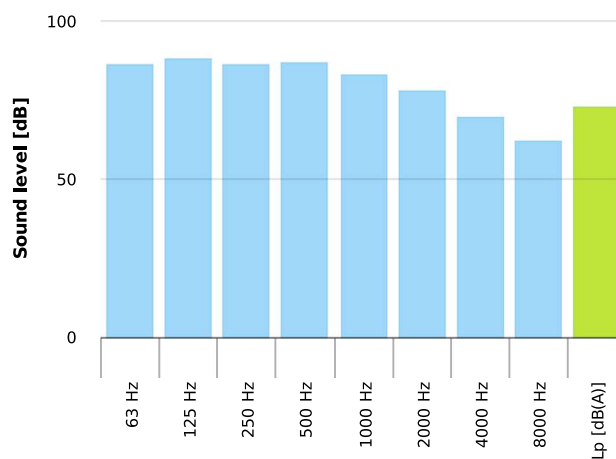


Table engines


Class IE	IE1
Size	63
Power[kW]	0.37
Current[A]	1.05
Voltage[V]	400
Cos φ	0.78
n	0.65

Working point

Q [m ³ /h]	1409
P _{sta} [Pa]	495.0
P _{tot} [Pa]	518.8
P _{in} [kW] [W]	270.3
n _{sta}	0.716
n _{tot}	0.75
Rpm	2850

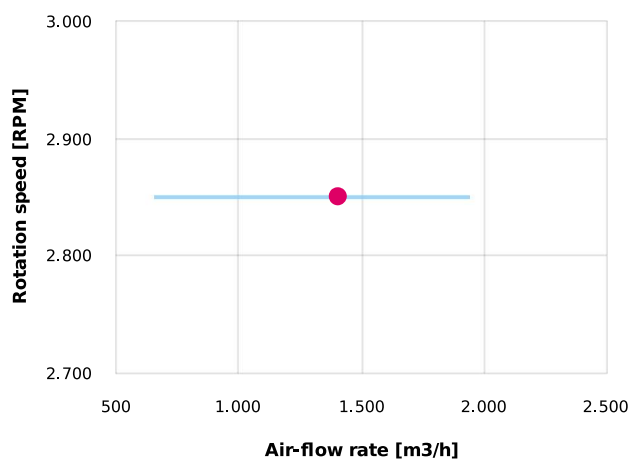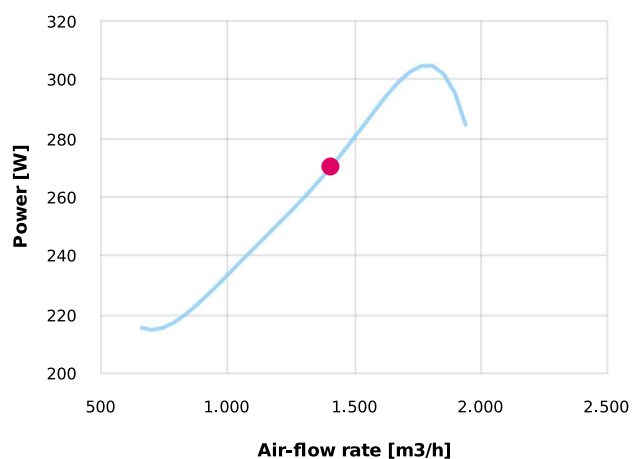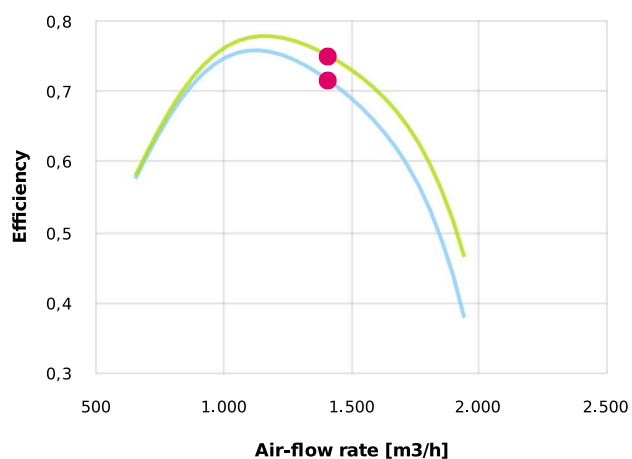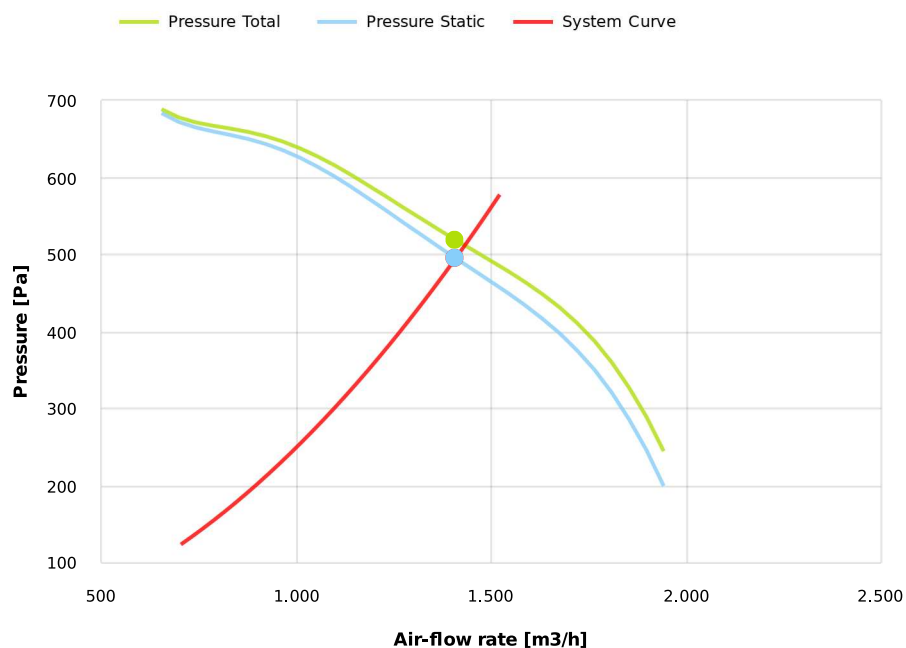

Dimensions

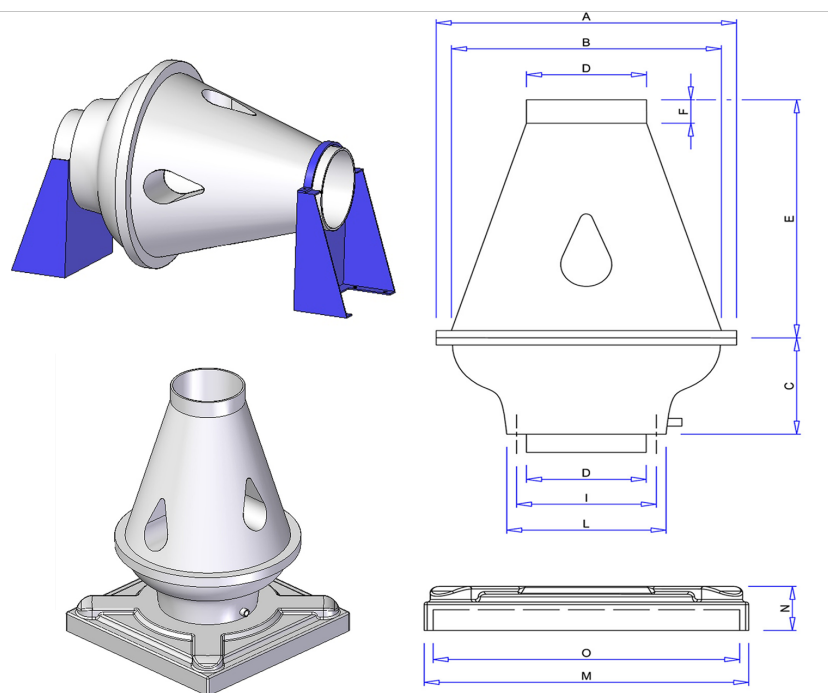

A	B	C	D	E	F	I	L	M	N	N°	O
500	450	185	200	460	50	230	265	540	80	8	490

Configurations & cad

LG 0°

