


Research Data

Air-flow rate[m ³ /h]	649.4
Pressure[Pa]	140
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV254ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	15
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	0.12
IP	55
INS	



MTCV254ATEX

Pe-el antistatic moulded housing - PP moulded impeller - stainless steel screws

Certificazioni





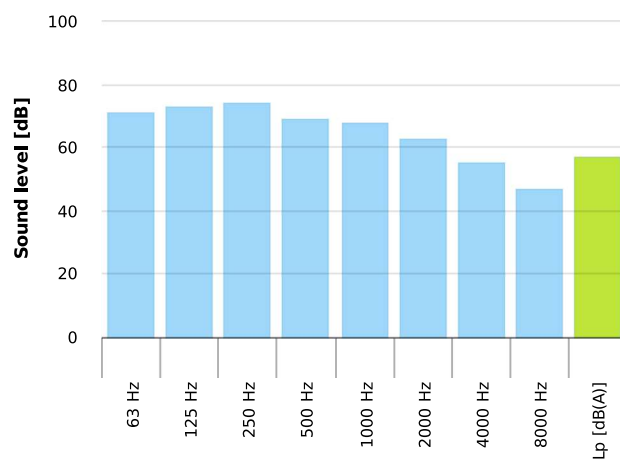


Table engines


Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57

Working point

Q [m ³ /h]	649.4
Psta [Pa]	140.0
Ptot [Pa]	145.0
Pin [kW] [W]	33.92
nsta	0.744
ntot	0.771
Rpm	1450

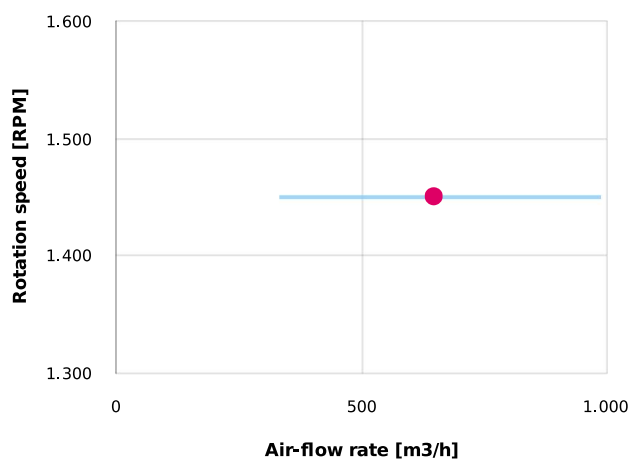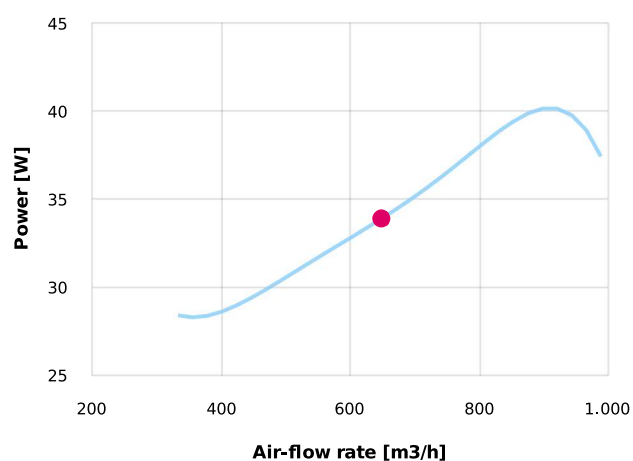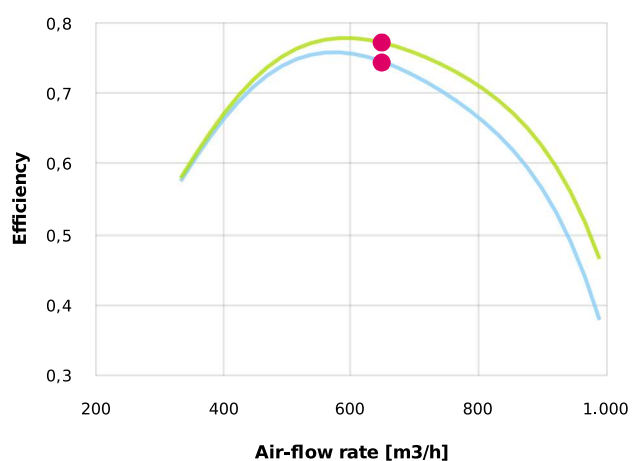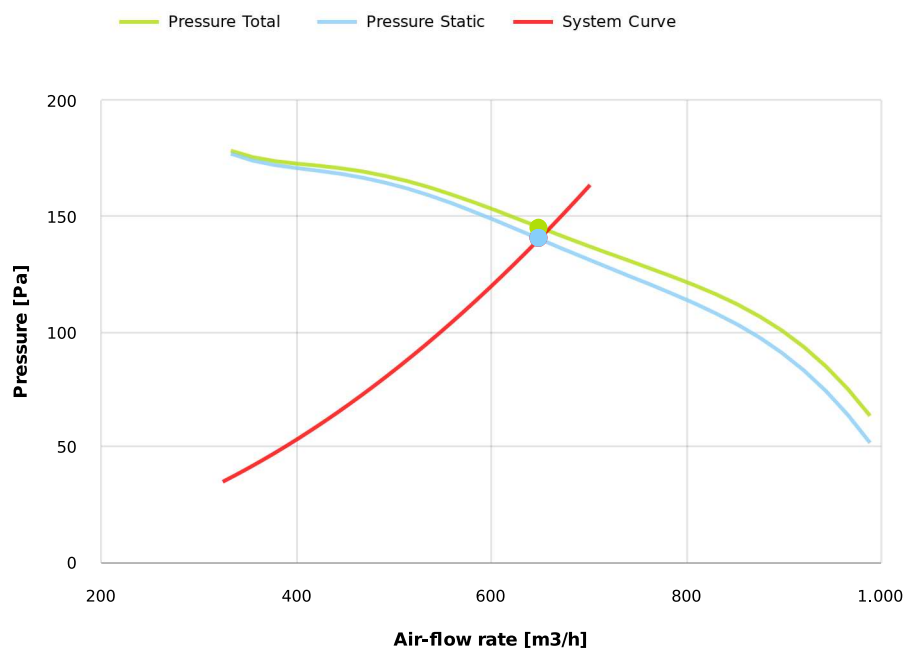

Dimensions

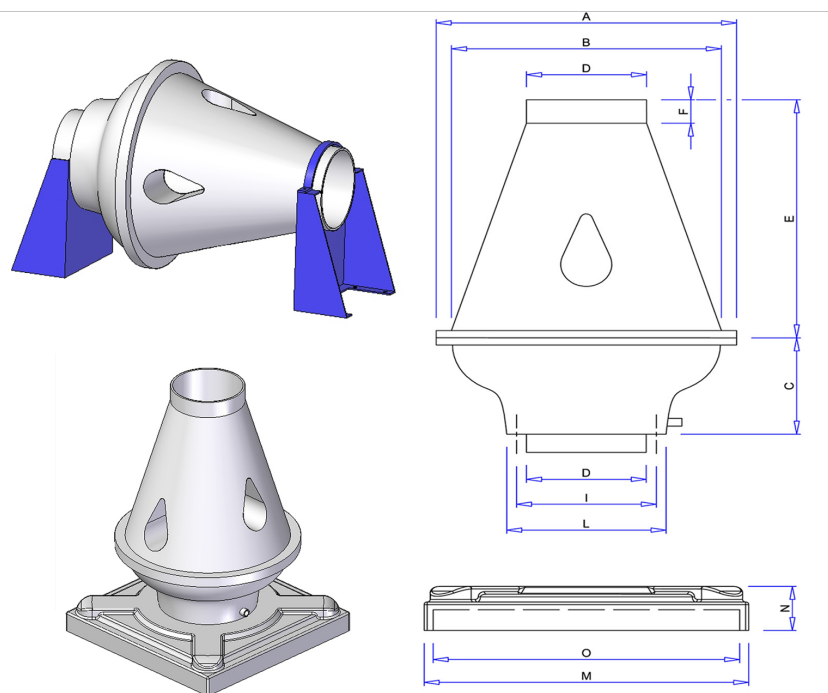

A	B	C	D	E	F	I	L	M	N	N°	O
500	450	185	200	460	50	230	265	540	80	8	490

Configurations & cad

LG 0°

