


Research Data

Air-flow rate[m ³ /h]	1415
Pressure[Pa]	225.1
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV314ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	29
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	0.25
IP	55
INS	



MTCV314ATEX

Pe-el antistatic moulded housing - PP moulded impeller - stainless steel screws

Certificazioni





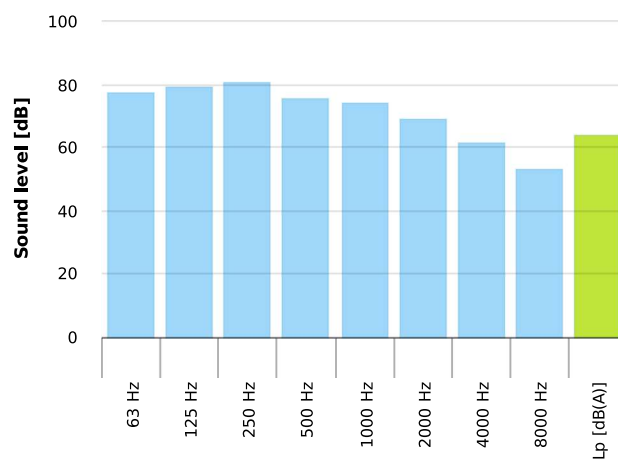


Table engines


Class IE	IE1
Size	71
Power[kW]	0.25
Current[A]	0.84
Voltage[V]	400
Cos φ	0.72
n	0.6

Working point

Q [m³/h]	1415
P_{sta} [Pa]	225.1
P_{tot} [Pa]	231.3
P_{in} [kW] [W]	121.0
n_{sta}	0.73
n_{tot}	0.75
Rpm	1450

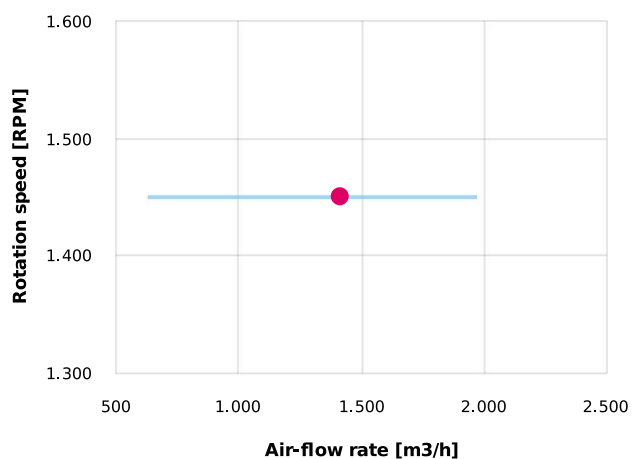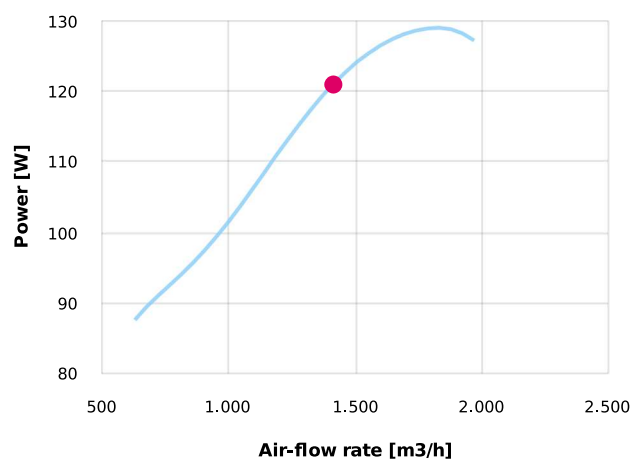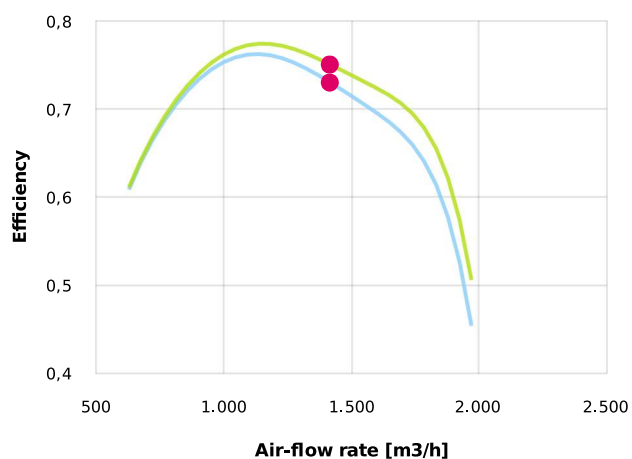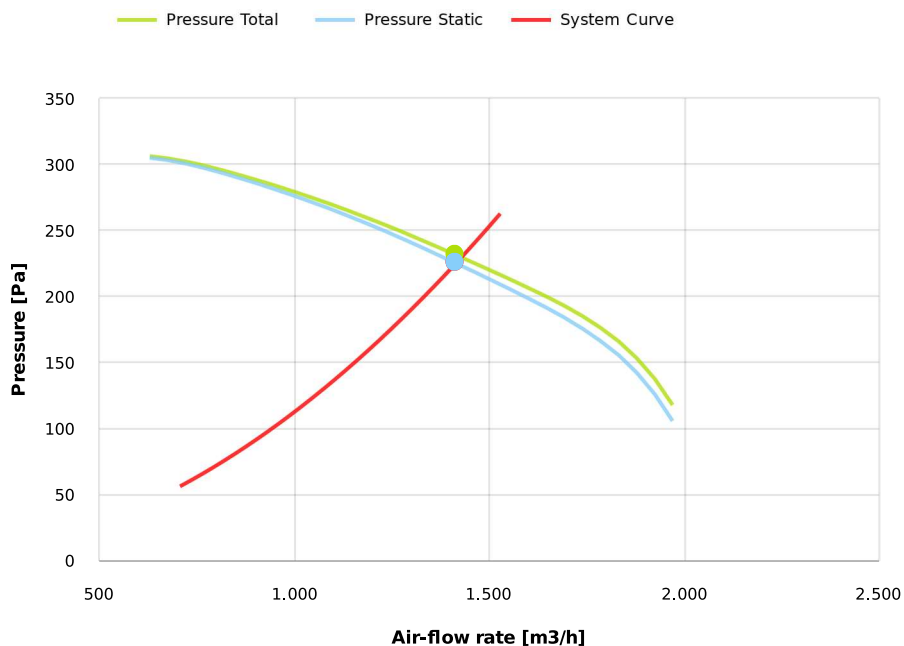

Dimensions

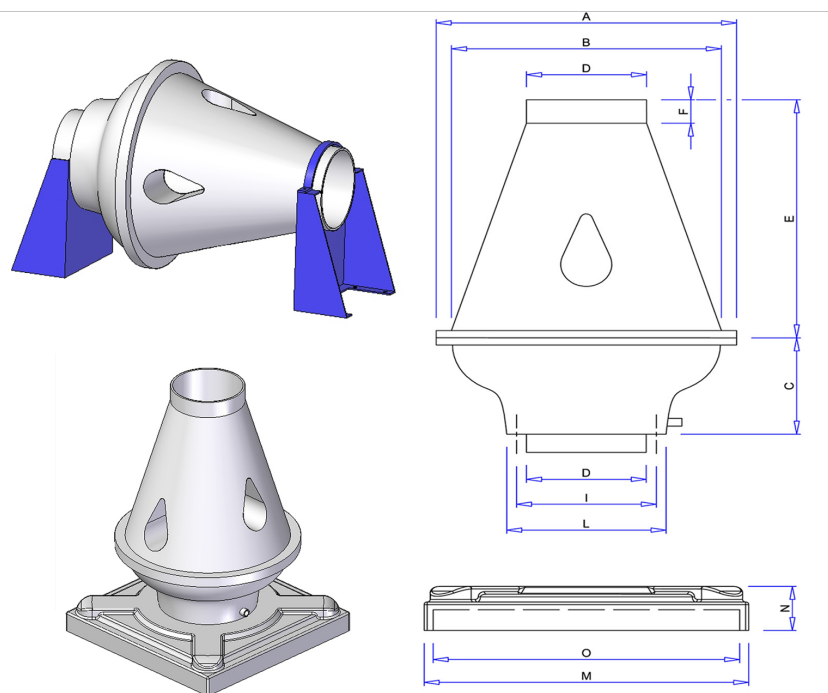

A	B	C	D	E	F	I	L	M	N	N°	O
600	560	240	280	600	50	325	365	540	80	8	490

Configurations & cad

LG 0°

